

### COMPANY SURGEONS

*Dr. Roscoe C. Webb, Chief Surgeon .....	Minneapolis, Minn.
*Dr. Ernest R. Anderson, Asst. Chf. Surg.,	Minneapolis, Minn.
Dr. David A. Burlingame, Roentgenologist.....	St. Paul, Minn.
*Dr. P. E. Kane .....	Butte, Montana
*Dr. E. M. Farr .....	Billings, Montana
Dr. Robert H. Leeds .....	Chinook, Montana
Dr. H. W. Bateman .....	Choteau, Montana
Dr. R. K. West .....	Cut Bank, Montana
Dr. S. D. Whetstone .....	Cut Bank, Montana
*Dr. John A. March .....	Shelby, Montana
Dr. Porter S. Cannon .....	Conrad, Montana
Dr. R. F. Miller .....	Chester, Montana
Dr. R. W. Jensen .....	Culbertson, Montana
Dr. K. Hamilton .....	Dodson, Montana
Dr. Evon L. Anderson .....	Fort Benton, Montana
*Dr. R. B. Richardson .....	Great Falls, Montana
Dr. J. C. Wolgamot .....	Great Falls, Montana
Dr. L. L. Howard .....	Great Falls, Montana
Dr. David Gregory .....	Glasgow, Montana
Dr. Philip A. Smith .....	Glasgow, Montana
*Dr. A. N. Smith .....	Glasgow, Montana
Dr. D. S. MacKenzie, Sr. ....	Havre, Montana
*Dr. D. S. MacKenzie, Jr. ....	Havre, Montana
Dr. D. J. Almas .....	Havre, Montana
Dr. C. W. Lawson .....	Havre, Montana
Dr. R. Wynne Morris .....	Helena, Montana
*Dr. Thos. L. Hawkins .....	Helena, Montana
Dr. E. M. Gans .....	Judith Gap, Montana
Dr. E. C. Hall .....	Laurel, Montana
*Dr. Robt. H. Dion .....	Lewistown, Montana
Dr. Paul Gans .....	Lewistown, Montana
*Dr. G. W. Setzer .....	Malta, Montana
*Dr. J. P. Craven .....	Williston, North Dakota
Dr. Edward J. Hagan .....	Williston, North Dakota
Dr. R. D. Knapp .....	Wolf Point, Montana

\*Designates also Examining Surgeon.

### OPHTHALMIC SURGEONS

(Eye Doctors)

Dr. B. E. Reasoner .....	Great Falls, Montana
Dr. W. L. Forster .....	Havre, Montana
Dr. H. L. Casebeer .....	Butte, Montana

J. R. McLELLAN, Chief Dispatcher  
C. E. EUDY, Chief Dispatcher  
M. J. SOMMERS, Trainmaster  
W. H. LITTLE, Trainmaster  
W. L. DORCY, Trainmaster  
A. L. EVANS, Trainmaster  
P. A. FREUEN, Trainmaster.  
A. R. McKEEN, Trainmaster.

Scanned from the Dean Ogle Collection

# GREAT NORTHERN RAILWAY COMPANY

## BUTTE DIVISION

# TIME TABLE 81

EFFECTIVE 12:01 A. M.

MOUNTAIN TIME

---

---

Sunday, June 10, 1956

---

---

H. J. SURLS, Superintendent.

C. M. RASMUSSEN, Assistant General Manager.

T. A. JERROW, General Manager.

A. W. CAMPBELL, General Superintendent Transportation.

2 WESTWARD

FIRST SUBDIVISION

EASTWARD

Station Numbers	Car Capacity		SECOND CLASS		FIRST CLASS			Distance from Bainville	Time Table No. 81 Effective June 10, 1956 STATIONS	Telegraph Call	Distance from Havre	SIGNS	FIRST CLASS			SECOND CLASS		
	Sidings	Other Tracks	461	473	3	27	31						4	28	32	462	470	
			Daily	Daily	Daily	Daily	Daily						Daily	Daily	Daily	Daily	Daily	Daily
685	E115 W174	164	L 9.20Am	L 12.01Am	L 10.34Pm	L 9.31Pm	L 7.47Am	.....	.....	B	271.17	DNJK PRXY	A 5.55Am	A 6.47Am	A 5.06Pm	A 12.43Pm	A 5.55Am	
692	109	4	9.30	12.10	10.42	9.39	7.54	6.83	.....	.....	264.34	P	5.48	6.39	4.58	12.33	5.42	
699	120	58	9.41	12.20	s 10.50	9.48	8.01	14.26	.....	CU	256.91	DNP	s 5.40	s 6.30	4.50	12.23	5.27	
705	107	5	9.50	12.28	10.58	9.54	8.07	19.76	.....	.....	251.41	P	5.34	6.23	4.44	12.15Pm	5.20	
722	E130 W118	74	10.08	12.45	11.13	10.09	8.21	33.47	.....	BR	237.70	DNP	5.20	6.08	4.30	11.56	4.57	
729	127	40	10.20	12.55	11.20	10.18	8.28	40.94	.....	.....	230.23	P	5.10	5.58	4.23	11.45	4.42	
733	130	83	10.30	1.05	s 11.27	10.26	8.34	47.46	.....	PO	223.71	DNPW	s 5.03	5.51	4.17	11.35	4.30	
741	130	17	10.40	1.15	11.36	10.34	8.40	54.26	.....	.....	216.91	P	4.55	5.44	4.10	11.25	4.18	
748	138 E135	24	10.53	1.25	11.44	10.43	8.47	62.24	.....	.....	208.93	P	4.47	5.34	4.02	11.14	4.04	
753	W135	327	<sup>462</sup> <b>11.05</b>	1.35	s 11.51	s 10.55	8.52	68.65	.....	WO	202.52	DNP	s 4.40	s 5.27	3.55	<sup>461</sup> <b>11.05</b>	3.54	
765	130 E 90	37	11.28	1.50	12.05Am	11.10	9.04	79.93	.....	GO	191.24	DP	4.25	5.12	3.44	10.50	3.38	
772	W 70	20	11.39	2.01	12.13	11.19	9.12	87.62	.....	FR	183.55	DNP	4.18	5.05	3.36	10.40	3.27	
777	130	11	11.46	2.07	12.19	11.24	9.17	92.66	.....	.....	178.51	P	4.12	5.00	3.30	10.33	3.20	
783	71	.....	11.53	2.14	12.26	11.30	9.23	98.31	.....	.....	172.86	P	4.06	4.55	3.23	10.25	3.12	
789	129	82	12.01Pm	2.21	12.31	11.36	9.29	103.71	.....	NA	167.46	DNP	4.00	4.50	3.17	10.17	3.05	
797	130	13	12.11	2.31	12.40	11.45	9.37	111.49	.....	.....	159.68	P	3.52	4.40	3.08	9.55	2.53	
803	Yard	740	12.20	<sup>470</sup> <b>2.45</b>	s 12.50	s 11.57	<sup>462</sup> <b>9.45</b>	118.22	AUTOMATIC BLOCK SIGNALS	GW	152.95	BDNKO PRWXY	s 3.45	s 4.20	3.00	<sup>31</sup> <b>9.45</b>	<sup>473</sup> <b>2.45</b>	
808	70	70	12.36	2.52	12.55	12.02Am	9.50	122.93	.....	.....	148.24	P	3.35	4.02	2.52	9.33	2.25	
815	125	27	12.45	3.05	1.03	12.10	9.56	129.96	.....	MA	141.21	DP	3.27	3.52	2.43	9.22	2.10	
820	71 E137	26	12.53	<sup>4</sup> <b>3.21</b>	1.10	12.16	10.02	135.25	.....	.....	135.92	P	<sup>473</sup> <b>3.21</b>	3.43	2.37	9.12	2.01	
828	W114	85	1.06	<sup>28</sup> <b>3.31</b>	f 1.20	12.27	10.11	144.03	.....	HD	127.14	DNP	f 3.10	<sup>473</sup> <b>3.31</b>	2.28	8.58	1.45	
837	71 W 93	15	1.23	3.42	<sup>470</sup> <b>1.29</b>	12.37	10.18	152.24	.....	.....	118.93	P	3.00	3.20	2.20	8.46	<sup>3</sup> <b>1.29</b>	
842	E166	121	1.30	3.48	f 1.35	12.42	10.23	156.79	.....	SF	114.38	DNJK OPXY	f 2.55	s 3.14	2.16	8.41	1.19	
852	71 W166	3	1.40	3.57	1.42	12.50	10.30	163.66	.....	.....	107.51	P	2.48	3.04	2.09	8.33	1.09	
860	E 89	110	<sup>32</sup> <b>2.01</b>	4.07	1.50	<sup>470</sup> <b>12.59</b>	10.37	171.19	.....	BO	99.98	DPY	2.40	2.55	<sup>461</sup> <b>2.01</b>	8.23	<sup>27</sup> <b>12.59</b>	
869	133	145	2.18	4.25	s <sup>4</sup> <b>2.20</b>	1.12	10.49	183.80	.....	MF	87.37	DNPW	s <sup>3</sup> <b>2.20</b>	s 2.42	1.48	8.06	12.31	
880	204	98	2.32	4.38	<sup>28</sup> <b>2.30</b>	1.22	10.59	193.37	.....	WA	77.80	DP	2.08	<sup>3</sup> <b>2.30</b>	1.38	7.54	12.17	
886	123	55	2.44	4.49	2.38	1.30	11.08	201.24	.....	DN	69.93	DNP	1.58	2.16	1.29	7.45	12.05Am	
892	124	5	2.53	4.57	2.44	1.36	11.15	206.93	.....	.....	64.24	P	1.52	2.08	1.23	7.38	11.56	
896	130 E 92	32	3.00	5.03	2.49	<sup>4</sup> <b>1.44</b>	11.21	211.35	.....	.....	59.82	P	<sup>27</sup> <b>1.44</b>	2.02	1.17	7.32	11.48	
901	W130 E126	26	3.08	5.10	2.55	<sup>28</sup> <b>1.54</b>	11.26	216.56	.....	S	54.61	DP	1.38	<sup>27</sup> <b>1.54</b>	1.12	7.24	11.38	
913	W 70	70	3.23	5.23	f 3.07	2.08	11.39	228.38	.....	HM	42.79	DNP	f 1.27	s 1.41	1.00	7.07	11.18	
919	76	45	3.33	5.30	3.13	2.16	11.45	234.71	.....	.....	36.46	P	1.20	1.35	12.54	6.58	11.07	
925	125	32	3.41	5.37	3.18	2.22	11.50	240.24	.....	Z	30.93	DP	1.15	1.30	12.48	6.50	10.59	
929	70	21	3.46	5.43	3.22	2.27	11.54	243.90	.....	.....	27.27	P	1.12	1.26	12.44	6.45	10.54	
935	W 74	342	3.54	5.50	s 3.27	2.34	11.59	249.49	.....	CK	21.68	DNPY	s 1.08	s 1.20	12.39	6.36	10.45	
943	.....	19	4.06	6.01	3.37	2.44	12.07Pm	257.51	.....	.....	13.66	IP	1.00	1.10	12.31	6.25	10.30	
956	Yard	2132	A 4.25Pm	A 6.20Am	A 3.50Am	A 3.00Am	A <sup>32</sup> <b>12.25Pm</b>	271.17	.....	HV	.....	BDNK OPRWX	L 12.45Am	L 12.55Am	L <sup>31</sup> <b>12.15Pm</b>	L 6.00Am	L 10.00Pm	
			7.05 38.28	6.19 42.93	5.16 51.49	5.29 49.45	4.38 58.52	Time Over Subdivision Average Speed Per Hour			5.10 52.48	5.52 46.23	4.51 55.91	6.43 40.37	7.55 34.25			

Westward trains are superior to eastward trains of the same class.

CONDITIONAL STOPS

No. 31 stops at Glasgow to discharge revenue passengers from Minot and East and to receive revenue passengers for Spokane and West where No. 31 is scheduled to stop.

No. 32 stops at Glasgow to discharge revenue passengers from Spokane and West and to receive revenue passengers for Minot and East where No. 32 is scheduled to stop.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 9 THROUGH 16.

WESTWARD

SECOND SUBDIVISION

EASTWARD 3

Station Numbers	Car Capacity		SECOND CLASS		FIRST CLASS			Distance from Havre	Time Table No. 81			Telegraph Calls	Distance from Cut Bank	SIGNS	FIRST CLASS			SECOND CLASS		
	Sidings	Other Tracks	461	473	31	3	27		Effective June 10, 1956						32	4	28	490	462	494
			Daily	Daily	Daily	Daily	Daily		STATIONS						Daily	Daily	Daily	Daily	Daily	Daily
956	Yard	2132	L 4.00Pm	L 6.00Am	L 12.35Pm	L 4.10Am	L 3.20Am	.....	Double Track	HAVRE...★	HV	128.91	BPRKD NWOX	A 12.05Pm	A 12.30Am	A 11.50Pm	A 5.25Am	A 2.30Pm	A 9.50Pm	
961	.....	29	4.10	6.10	12.42	A 4.17Am	3.25	4.03	} 4.03 PACIFIC JCT. 5.87	.....	124.88	JIPY	L 12.01Pm	L 12.19Am	11.40	5.18	2.20	9.40		
967	130	7	4.20	6.20	12.48	.....	3.33	9.92		BURNHAM.....	.....	118.99	P	11.54	.....	11.32	5.08	2.10	9.31	
971	61	14	4.30	6.30	12.53	.....	3.38	14.62	4.70 FRESNO.....	.....	114.29	P	11.50	.....	11.25	4.59	2.03	9.25		
976	130	44	4.40	6.40	12.58	.....	3.44	19.35	4.73 KREMLIN★.....	KN	109.56	DNP	11.45	.....	11.19	4.50	1.56	9.19		
986	126	33	5.00	7.00	1.08	.....	3.58	29.47	10.12 GILDFORD.....	GR	99.44	DP	11.35	.....	11.05	4.34	1.40	9.03		
992	61	30	5.10	7.10	1.14	.....	4.06	35.37	5.90 HINGHAM.....	HG	93.54	DP	11.29	.....	10.54	4.24	1.30	8.53		
998	142	35	5.20	7.20	1.20	.....	4.14	41.34	5.97 RUDYARD★.....	RU	87.57	DP	11.23	.....	10.42	4.14	1.20	8.43		
1004	128	29	5.30	7.30	1.26	.....	4.25	47.58	6.24 INVERNESS.....	RN	81.33	DP	11.17	.....	10.31	3.52	1.02	8.32		
1008	.....	32	5.35	7.35	1.30	.....	4.31	51.42	3.84 JOPLIN.....	JO	77.49	DP	11.13	.....	10.20	3.46	12.56	8.26		
1013	E 99 W125	.....	5.40	7.40	1.33	.....	4.35	54.39	2.97 BUELOW.....	.....	74.52	P	11.11	.....	10.14	3.41	12.51	8.21		
1018	E 89 W 60	93	5.50	7.50	1.40	.....	4.48	61.49	7.10 CHESTER★.....	CH	67.42	DNP	11.03	.....	10.02	3.23	12.33	8.03		
1024	140	33	5.58	7.58	1.46	.....	4.55	67.03	5.54 TIBER.....	.....	61.88	P	10.57	.....	9.52	3.14	12.24	7.54		
1031	129	20	6.08	8.08	1.54	.....	5.05	74.56	7.53 LOTHAIR.....	AR	54.35	DP	10.49	.....	9.44	3.02	12.12	7.42		
1037	60	42	6.16	8.16	2.01	.....	5.14	80.54	5.98 GALATA.....	GA	48.37	DP	10.42	.....	9.34	2.52	12.02Pm	7.32		
1043	141	24	6.24	8.25	2.07	.....	5.25	86.56	6.02 DEVON★.....	CD	42.35	DNP	10.35	.....	9.24	2.42	11.52	7.22		
1052	137	74	6.37	8.37	2.16	.....	5.40	95.31	8.75 DUNKIRK.....	.....	33.60	P	10.26	.....	9.12	2.30	11.40	7.10		
1061	Yard	382	6.50	8.50	s 2.30	L 10.20Am	s 6.05	104.64	9.33 SHELBY★.....	SJ	24.27	BRKDNP WOIXYX	s 10.15	A 6.25Pm	s 9.00	2.15	11.25	6.55		
1063	.....	.....	6.54	8.54	2.33	10.23	6.07	106.13	1.49 SWEET GRASS LINE JCT. 11.54	.....	22.78	PXJ	10.08	6.23	8.48	2.10	11.20	6.50		
1074	W122	31	7.10	9.10	2.47	10.35	f 6.20	117.67	ETHRIDGE.....	DG	11.24	DP	9.57	6.09	f 8.39	1.55	11.05	6.35		
1082	.....	.....	A 7.23	A 9.23	A 2.57	A 10.45	A 6.30	125.42	7.75 BALTIC.....	.....	3.49	P	9.49	5.59	8.29	1.40	10.50	6.20		
1087	Yard	393	A 7.30Pm	A 9.30Am	A 3.03Pm	A 10.50Am	A 6.35Am	128.91	3.49 CUT BANK★.....	CT	.....	BDNIK PRX	L 9.45Am	L 5.55Pm	L 8.20Pm	L 1.30Am	L 10.40Am	L 6.10Pm		
			3.30 36.83	3.30 36.83	2.28 52.23	.37 45.89	3.15 39.66	Time Over Subdivision Average Speed Per Hour						2.20 55.25	.41 41.41	3.30 36.83	3.55 32.48	3.50 33.63	3.40 35.15	

WESTWARD

SEVENTH SUBDIVISION

EASTWARD

Station Numbers	Car Capacity		SECOND CLASS		Distance from Saco	Time Table No. 81			Telegraph Calls	Distance from Hogeland	SIGNS	SECOND CLASS	
	Sidings	Other Tracks	333			Effective June 10, 1956						334	
			Mon., Wed. and Fri.	.....		STATIONS						Tues., Thur. and Sat.	.....
842	W93	287	L 8.50Am	.....	.....	.....	.....	.....	SF	78.72	BDNJK PRXY	A 11.10Am	.....
SH 9	40	51	s 9.55	8.73	.....	.....	.....	.....	.....	69.92	P	s 10.35	.....
SH15	.....	24	f 10.25	15.31	.....	.....	.....	.....	.....	63.41	P	f 10.20	.....
SH26	.....	34	s 11.25	25.87	.....	.....	.....	.....	W	52.85	DP	s 9.40	.....
SH39	.....	35	s 12.25Pm	38.82	.....	.....	.....	.....	N	39.90	DP	s 9.05	.....
SH54	.....	27	f 1.45	54.12	.....	.....	.....	.....	.....	24.60	P	f 7.45	.....
SH67	.....	44	s 2.40	67.14	.....	.....	.....	.....	R	11.58	DP	s 7.13	.....
SH79	.....	74	A 3.20Pm	78.72	.....	.....	.....	.....	X	.....	DPRXY	L 6.45Am	.....
			6.30 12.1	Time Over Subdivision Average Speed Per Hour									4.25 20.97

CONDITIONAL STOPS

No. 31 Chester and Cut Bank to discharge revenue passengers from Williston and east, and to receive revenue passengers for Spokane and west where No. 31 is scheduled to stop.

No. 32 Chester and Cut Bank to discharge revenue passengers from Spokane and west and to receive revenue passengers for Williston and east where No. 32 is scheduled to stop.

Westward trains are superior to eastward trains of the same class, Second and Seventh Subdivisions.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 9 THROUGH 16.

## 4 WESTWARD

## THIRD SUBDIVISION

## EASTWARD

Station Numbers	Car Capacity		FIRST CLASS			Distance from Havre	Time Table No. 81 Effective June 10, 1956	STATIONS	Telegraph Calls	Distance from Great Falls	SIGNS	FIRST CLASS			
	Sidings	Other Tracks			3							Daily	4		
956	Yard	2391			L	4.10Am	4.03	HAVRE ★	HV	123.25	BDNK OPRWX	A	12.30Am		

## TRAINS BETWEEN PACIFIC JCT. AND HAVRE WILL BE GOVERNED BY SECOND SUBDIVISION

961					L	4.17Am	4.03	Pacific Jct.		119.22	IJPY	A	12.19Am		
Z11	50	10				4.33	14.91	LAREDO		108.34	P		12.05Am		
Z20	94	37				4.44	24.73	BOX ELDER	BX	98.52	DP		11.53		
Z31	76	98			s	5.00	35.55	BIG SANDY	BS	87.70	DNP	s	11.40		
Z37	50	14				5.08	40.84	VERONA		82.41	P		11.29		
Z45	90	25				5.19	49.44	VIRGELLE		73.81	P		11.16		
Z56	56	13				5.34	60.29	LIPPARD		62.96	P		11.02		
Z62	90	18				5.42	66.24	CHAPPELL	CQ	57.01	DP		10.54		
Z67	50					5.48	70.79	TETON		52.46	P		10.48		
Z75	94	72			s	6.10	78.74	FORT BENTON	BN	44.51	DNP	s	10.32		
Z80		36				6.17	83.77	KERSHAW		39.48	P		10.22		
Z85	41	8				6.23	88.52	TUNIS		34.73	P		10.16		
Z91	78	36				6.30	94.43	CARTER	CA	28.82	DP		10.09		
Z96	32	20				6.37	99.43	FLOWEREE		23.82	P		10.03		
Z103	89	29				6.47	107.01	PORTAGE	RE	16.24	DP		9.54		
Z108	103	19				6.55	112.60	SHEFFELS		10.65	P		9.47		
Z113		46				7.01	117.49	RAINBOW		5.76	P		9.40		
Z119	Yard	4224			A	7.15Am	123.25	GREAT FALLS ★	PD		BDNJK PRX	L	9.30Pm		
						3.05 39.97		Time Over Subdivision Average Speed Per Hour					3.00 41.08		

Westward trains are superior to eastward trains of the same class.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 9 THROUGH 16.

WESTWARD

FOURTH SUBDIVISION

EASTWARD 5

Station Numbers	Car Capacity		SECOND CLASS				FIRST CLASS		Distance from Great Falls	Time Table No. 81 Effective June 10, 1956	Telegraph Calls	Distance from Sweet Grass	SIGNS	FIRST CLASS	
	Sidings	Other Tracks	495	403	235	3	4	236							
			Daily	C. M. St. P. & P. R. R. Mon., Wed., Fri.	Daily Ex. Sun.	Daily	Daily	Daily Ex. Sun.							
.....	Yard	4224			L 7.30Am	L 7.40Am									
Z119					L 8.45Am	A 7.33Am	7.43	.63		GREAT FALLS ★	PD	137.53	BDNJK PRX BDNJKO PRWXY	A 9.10Pm	A 5.30Pm
					8.55	L 9.10Am	7.48	3.73		WEST SIDE JCT. ★	GF	136.90		8.54	L 5.27Pm
ZB 8	9	15			9.05	9.20	7.55	7.82		EMERSON JCT. ....		133.80	JP	8.49	
ZB12	54	19			9.15	A 9.30Am	8.02	12.10		MANCHESTER .....		129.71	P	8.41	
ZB19	51	6			9.29		8.11	18.78		VAUGHN .....	BY	125.43	DNJPK	8.35	
ZB27	126	26			9.44		8.21	26.11		GORDON .....		118.75	P	8.25	
										POWER .....	PO	111.42	DNJPKY	8.14	
ZB37	125	57			10.05		s 8.38	36.67		DUTTON .....	DU	100.86	DP	s 8.07	
ZB40	61	13			10.13		8.43	39.71		ACME .....		97.82	P	8.02	
ZB45	60	28			10.22		8.49	44.07		COLLINS .....	ON	93.46	DP	7.56	
ZB55	99	32			10.41		9.01	54.03		BRADY .....	BA	83.50	DP	7.41	
ZB61	51				10.53		9.08	60.12		WITHEY .....		77.41	P	7.33	
ZB69	164	265			11.17		s 9.25	67.43		CONRAD .....	RD	70.10	DNP WXYB	s 7.23	
					11.25		9.30	70.65		Montana Western Jct. ....		66.88	P	7.11	
ZB79	60	20			11.40		9.42	78.29		LEDGER .....	FA	59.24	DP	7.01	
ZB84	50	14			11.50		9.49	82.93		FOWLER .....		54.60	P	6.54	
ZB91	125	6			12.03Pm		9.58	89.46		NAISMITH .....		48.07	P	6.45	
ZB95	60	6			12.13		10.05	94.09		ANDALE .....		43.44	P	6.38	
1061	Yard	382			A 12.25Pm		A 10.15Am	98.68		SHELBY ★ .....	SJ	38.85	PBDNJY KORWX	L 6.30Pm	

TRAINS BETWEEN SHELBY AND SWEET GRASS LINE JCT. WILL BE GOVERNED BY SECOND SUBDIVISION

								100.17		SWEET GRASS LINE JCT. ....		37.36	XJP		
ZB109	30							107.98		ALOE .....		29.55	P		
ZB120	50	114						118.75		KEVIN .....	VN	18.78	XDP		
ZB130	25	64						129.17		SUNBURST .....	SU	8.36	XDP		
ZB139	21	92						137.53		SWEET GRASS .....	G		BDKPR XY		
					3.40	.20	.03	2.35		Time Over Subdivision				2.40	.03
					26.89	25.36	12.6	38.25		Average Speed Per Hour				36.96	12.6

Westward trains are superior to eastward trains of the same class.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 9 THROUGH 16.

## 6 WESTWARD

## FIFTH SUBDIVISION

## EASTWARD

Station Numbers	Car Capacity		FIRST CLASS				Distance from Great Falls	Time Table No. 81 Effective June 10, 1956				Telegraph Calls	Distance from Butte	SIGNS	FIRST CLASS				
	Sidings	Other Tracks				235											236		
						Daily Ex. Sun.		STATIONS							Daily Ex. Sun.				
Z 119	Yard	4224				L 7.30Am		GREAT FALLS ★				PD	170.90	BDNJKPRX	A	5.30Pm			
<b>TRAINS BETWEEN WEST SIDE JCT. AND GREAT FALLS BE GOVERNED BY FOURTH SUBDIVISION.</b>																			
		Yard				L 7.33Am	0.63	WEST SIDE JCT. ★				GF	170.27	BDNJKOP RWXY	A	5.27Pm			
Z 130	42	38				7.53	14.08	ULM.				M	156.82	DP		5.07			
Z 137	42					8.02	20.89	RIVERDALE					150.01	P		4.59			
Z 145	43	58				s 8.10	28.58	CASCADE				Q	142.32	DNP	s	4.49			
Z 153	42					8.20	36.79	HARDY					134.11	P		4.37			
Z 160	42					8.33	44.39	MID CANON					126.51	P		4.25			
Z 167	43	39				f 8.43	51.51	CRAIG					119.39	P	f	4.14			
Z 175	47	28				s 8.55	59.39	WOLF CREEK				WÇ	111.51	DP	s	4.03			
Z 184	43	9				9.10	68.59	SIEBEN					102.31	P		3.46			
Z 197	102	18				f 9.28	81.12	SILVER CITY				MN	89.78	DP	f	3.30			
							95.20	N. P. RY. CROSSING					75.70	I					
							95.92	N. P. RY. CROSSING					74.98	M BDNKP XY					
Z 214	Yard	289				s 9.53	97.79	HELENA				HN	73.11		s	3.05			
Z 229	45	43				f 10.15	112.37	CLANCY					58.53	P	f	2.38			
Z 235						10.25	117.91	JEFFERSON					52.99			2.30			
Z 236	60	12				10.29	119.50	CORBIN					51.40	P		2.27			
Z 244	50	7				10.44	125.91	AMAZON					44.99	P		2.15			
Z 250	50	34				s 10.55	132.22	BOULDER				RO	38.68	DP	s	2.04			
Z 257	44	28				f 11.10	139.92	BASIN				SI	30.98	DP	f	1.48			
Z 261	36	33				11.18	143.82	BERNICE					27.08	P		1.42			
Z 269	42					11.30	151.94	ELK PARK					18.96	P		1.27			
Z 279	45	16				11.40	160.38	WOODVILLE					10.52	PX		1.15			
							12.05Pm	169.40	N. P. RY. CROSSING					1.50	I BDNJKO PRWXY		12.55		
Z 288	Yard	722				A 12.10Pm	170.90	BUTTE				DU			L	12.50Pm			
						4.37 36.99		Time Over Subdivision Average Speed Per Hour								4.37 36.99			

Westward trains are superior to eastward trains of the same class.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 9 THROUGH 16.

WESTWARD

SIXTH SUBDIVISION

EASTWARD 7

Station Numbers	Car Capacity		SECOND CLASS		FIRST CLASS		Distance from Mossmain	Time Table No. 81			Telegraph Call	Distance from Great Falls	SIGNS	FIRST CLASS		SECOND CLASS	
	Sidings	Other Tracks	239	495		43		Effective June 10, 1956						42		240	496
			Daily Ex. Sun.	Daily		Daily Ex. Mon.		STATIONS						Daily Ex. Sun.		Daily Ex. Sun.	Daily
ZD 237	Yard				L 1.00Am			BILLINGS			BG		BCDNKO RWXY	A 12.15Am			
<b>TRAINS BETWEEN MOSSMAIN AND BILLINGS AND LAUREL BE GOVERNED BY NORTHERN PACIFIC RY. TIME TABLE &amp; RULES.</b>																	
ZD 222	12		L 10.00pm		L 1.22Am		3.94	12.08	MOSSMAIN	222.72	JPHY		A 11.50pm				A 5.00Am
								3.94	N. P. RY. JCT.	218.78	J						
ZD 218	50	25	10.10		f 1.28		4.03	09	HESPER	218.69	HS	DPX	f 11.42				4.40
ZD 213	125	24	10.22		f 1.35		9.30	5.27	RIMROCK	213.42		P	f 11.32				4.30
ZD 201	50	19	10.37		f 1.48		21.48	12.18	ACTON	201.24		P	f 11.17				4.00
ZD 194	50	27	10.52		f 1.55		27.81	6.33	COMANCHE	194.91		P	f 11.10				3.50
ZD 186	125	57	<sup>42</sup> 11.01		f 2.04		36.36	8.55	BROADVIEW	186.36	BW	DNP	f <sup>496</sup> 11.01				3.38
ZD 180	49		11.27		2.11		42.37	6.01	PAINTED ROBE	180.35		P	10.53				3.24
ZD 174	50	18	11.39		f 2.18		48.41	6.04	BELMONT	174.31		P	f 10.46				3.12
ZD 166	124	24	11.54		f 2.27		55.97	7.56	CUSHMAN	166.75	CN	P	f 10.39				3.01
ZD 153	49	14	12.20Am		f <sup>496</sup> 2.42		69.05	13.08	FRANKLIN	153.67		P	f 10.23				<sup>43</sup> 2.42
ZD 148	49		12.32		f 2.49		74.68	5.63	WALLUM	148.04		P	f 10.16				2.29
ZD 141	125	28	12.45		f 2.57		81.66	6.98	HEDGESVILLE	141.06	DG	DNP	f 10.08				2.17
ZD 133	49		12.58		3.05		88.72	7.06	NIHILL	134.00		P	9.57				2.03
ZD 127	49		1.11		3.13		95.12	6.40	OXFORD	127.60		P	9.49				1.50
ZD 120	86	122	<sup>496</sup> 1.36		s 3.22		101.97	6.85	JUDITH GAP	120.75	JU	DKPWY	s 9.41				<sup>496</sup> 1.36
ZD 108	50	34	2.03		f 3.37		114.29	12.32	BUFFALO	108.43	BO	DP	f 9.25				12.57
ZD 102	50	3	2.15		3.44		120.15	5.86	MENDON	102.57		P	9.17				12.47
ZD 92	61	76	2.40		f 3.56		129.66	9.51	HOBSON	93.06	HO	DP	f 9.05				12.29
ZD 87	125	83	L 8.50Am		f 4.05		134.97	5.31	MOCCASIN	87.75	MC	DNJPHY	f 8.58			A 3.23Am	12.20
ZD 82	125	38	s 9.00		f 4.12		140.42	5.45	BENCHLAND	82.30	BD	DP	f 8.51			f <sup>496</sup> 3.13	12.01Am
ZD 76	68	46	s 9.10		f 4.20		146.53	6.11	WINDHAM	76.19	WD	DP	f 8.43			f 3.03	11.50
ZD 68	60	98	s 9.23		s 4.29		153.69	7.16	STANFORD	69.03	SD	DNPW	s 8.33			s 2.50	11.40
ZD 63	50	15	f 9.31		4.38		159.05	5.36	DOVER	63.67		P	f 8.25			f 2.40	11.30
ZD 58	50		s 9.41		4.45		164.36	5.31	MERINO	58.36		P	f 8.19			f 2.31	11.20
ZD 52	50	35	s 9.53		f 4.53		170.57	6.21	GEYSER	52.15	GY	DNP	f 8.12			s 2.20	11.10
ZD 45	50	25	f 10.04		f 5.02		176.75	6.18	SPION KOP	45.97		P	8.03			f 2.09	10.55
ZD 39	50	18	s 10.15		f 5.12		182.96	6.21	RAYNESFORD	39.76	RF	DP	f 7.54			f 1.58	10.40
ZD 34	51	24	f 10.25		f 5.20		188.26	5.30	BLTYHE	34.46		P	7.47			f 1.48	10.25
ZA 28	132	40	f 10.35		f 5.27		194.21	5.95	ARMINGTON	28.51		P	7.40			f 1.38	10.10
ZA 26	64	s 10.39	4.56		s 5.31		196.19	1.98	BELT	26.53	B	DNP	s 7.37			s 1.33	10.05
ZA 22	125	16	f 10.48		f 5.38		201.12	4.93	WAYNE	21.60		P	7.29			f 1.24	9.55
ZA 19	19	f 10.54	5.12		f 5.43		204.25	3.13	FIFE	18.47			7.24			f 1.18	9.42
ZA 14	14	f 11.00	5.19		f 5.48		207.47	3.22	SWIFT	15.25		P	7.20			f 1.12	9.35
ZA 10	84	58	f 11.09		f 5.58		212.64	5.17	GERBER	10.08		P	f 7.13			f 1.03	9.25
ZA 6	67	17	f 11.16		6.03		216.22	3.58	FIELDS	6.50		P	7.09			f 12.56	9.18
Z 119	Yard	4224	A 11.30Am	A 5.55Am	A 6.15Am	222.72		6.50	GREAT FALLS		PD	BDNJKP RX	L 7.00pm			L 12.45Am	L 9.00pm
			2.40 32.9	7.55 28.1	4.53 45.6				Time Over Subdivision Average Speed Per Hour				4.50 46.1			2.38 33.4	8.00 27.8

Westward trains are superior to eastward trains of the same class.  
SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 9 THROUGH 16.

## 8 WESTWARD

## EIGHTH SUBDIVISION

## EASTWARD

Station Numbers	Car Capacity		SECOND CLASS		Distance from Lewistown	Time Table No. 81 Effective June 10, 1956	Telegraph Calls	Distance from Moccasin	SIGNS	SECOND CLASS	
	Sidings	Other Tracks		239						Daily Ex. Sunday	240
ZF30	Yard			L 7.10Am		LEWISTOWN	WN	30.73	BDJKP RXY	A 5.25Am	
<b>TRAINS BETWEEN LEWISTOWN AND SPRING CREEK JUNCTION BE GOVERNED BY C. M. ST. P. &amp; P. R. R. TIME TABLE AND RULES.</b>											
ZF20	25			L 7.35Am	9.22	9.22 SPRING CREEK JCT.		21.51	JPR	A 4.57Am	
ZF14	34			f 7.39	10.41	1.19 KINGSTON		20.32		f 4.45	
ZF 8	34			s 7.58	16.50	6.09 ROSSFORK		14.23	P	s 4.34	
ZD87	50	94		s 8.19	23.21	6.71 KOLIN	KO	7.52	DP DNJP RXY	s 4.13	
				A 8.42Am	30.73	7.52 MOCCASIN	MC			L 3.50Am	
				1.32 20.5		Time Over Subdivision Average Speed Per Hour				1.35 19.4	

## WESTWARD

## NINTH SUBDIVISION

## EASTWARD

Station Numbers	Car Capacity		SECOND CLASS		Distance from Vaughn	Time Table No. 81 Effective June 10, 1956	Telegraph Calls	Distance from Augusta	SIGNS	SECOND CLASS	
	Sidings	Other Tracks	403	365						C. M. St. P. & P. R. R.	366
ZB12	54	19		L 9.30Am	L 7.31Am	VAUGHN	BY	41.70	DJPRX	A 11.56Am	A 3.20Pm
ZE 9	22			A 9.45Am	7.46	5.64 DRACUT JCT.		36.06	JPR	11.37	L 3.05Pm
ZE14	27			f 7.56	8.83	3.19 SUN RIVER		32.87		f 11.25	
ZE19	26			f 8.10	13.34	4.51 FORT SHAW	FS	28.36	DP	f 11.11	
ZE25	26			s 8.28	18.97	5.63 SIMMS	SM	22.73	DPW	s 10.59	
ZE30	14			f 8.39	22.90	3.93 LOWRY		18.80		f 10.48	
ZE42	34			f 8.57	29.41	6.51 RIEBELING		12.29		f 10.30	
				A 9.37Am	41.70	12.29 AUGUSTA	GN		DPRWY	L 9.50Am	
				.15 22.6	2.06 19.9	Time Over Subdivision Average Speed Per Hour				2.06 19.9	.15 22.6

## WESTWARD

## TENTH SUBDIVISION

## EASTWARD

Station Numbers	Car Capacity		SECOND CLASS		Distance from Power	Time Table No. 81 Effective June 10, 1956	Telegraph Calls	Distance from Pendroy	SIGNS	SECOND CLASS	
	Sidings	Other Tracks	373							Mon., Wed., Fri.	374
ZB27	126	26		L 8.12Am		POWER	PO	51.11	DNJPR XY	A 1.50Pm	
ZG 6	10			f 8.27	5.72	5.72 CORDOVA		45.39		f 1.30	
ZG12	24			f 8.48	11.60	4.88 CLEIV		39.51		f 1.10	
ZG17	34			f 9.03	17.08	5.48 BOLE		34.03	P	f 12.45	
ZG22				A 9.14Am	21.22	4.14 EASTHAM JCT.		29.89	JPR	L 12.30Pm	

## TRAINS BETWEEN EASTHAM JCT. AND CHOTEAU JCT. BE GOVERNED BY C. M. ST. P. &amp; P. R. R. TIME TABLE AND RULES.

ZG29	55			L 9.33Am	28.05	6.83 CHOTEAU JCT.		23.06	JPR	A 12.10Pm	
				s 9.36	28.70	.65 CHOTEAU	CO	22.41	DPW	s 12.08Pm	
					29.54	0.84 C. M. St. P. & P. R. R. CROS'G.		21.57			
ZG37	Spur 8			f 10.00	36.57	7.03 KOYL		14.54		f 11.44	
ZG42	35			s 10.18	42.53	5.96 BYNUM	BU	8.58	DP	s 11.27	
ZG51	21	42		A 10.47Am	51.11	8.58 PENDROY	RY		DFRY	L 11.00Am	
				2.35 19.8		Time Over Subdivision Average Speed Per Hour				2.50 18.1	

Westward trains are superior to eastward trains of the same class on Eighth, Ninth and Tenth Subdivisions.  
SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 9 THROUGH 16.



ALL SUBDIVISIONS

1. SPEED RESTRICTIONS GENERAL.

(a) Where Automatic block and Interlocking Rules and Signal Indications require movement at RESTRICTED SPEED, such movements must be made prepared to stop short of train, obstruction, or switch not properly lined and on the lookout for broken rail or anything that may require the speed of a train to be reduced; but not exceeding 15 MPH or as much slower as necessary; and where conditions require the movement must be controlled so stop can be made in time to avoid accident.

(b) Maximum permissible speed of passenger, freight and mixed trains will be designated by distinctive reflectorized roadway signs set in an upward angle of 45 degrees.

Except as directly affected by speed restrictions prescribed in Item 1—ALL SUBDIVISIONS—and other speed restrictions covered by Item 2 under individual Subdivisions, the 45 degree signs designate zone speed territories and the numerals thereon indicate in miles per hour the maximum permissible speed which will govern until the next zone sign is reached.

When the movement is from a higher to a lower speed zone, the zone sign is located approximately one mile from the point where the lower speed becomes effective. At the end of this one mile is located a reflectorized angular Restricting Sign, yellow background with black stripes, indicating the point where lower speed becomes effective. Lower speed to govern until entire train passes next zone sign.

When the movement is from a lower to a higher speed zone, the 45 degree sign is located at the point where speed may be increased.

In double track territory, when trains or engines are operated against the current of traffic or when one of the tracks is used as single track; in either case if the track being used is not signaled for traffic in the direction of the movement, the maximum permissible speed is ..... Passenger Freight  
59 MPH 49 MPH

This does not modify Rule 93; Further trains and engines operating under the above conditions must not exceed the maximum permissible speed prescribed by the 45 degree signs with the current of traffic.

The 45 degree sign has two sets of figures. The numerals preceded with letter "P" apply to passenger trains and letter "F" to freight and mixed trains.

(c) When passenger trains are handled by Diesel or Electric engines, the train will not exceed the maximum speed authorized by Speed Limit Plate on engine, and will be governed by the 45 degree signs where a lower speed is prescribed.

When freight cars, except cars equipped with steel wheels, air signal and steam heat lines, are handled in passenger trains, the train will not exceed maximum permissible speed for freight trains in the territory operated.

(d) Speed shown on Speed Limit Plate on engines must not be exceeded.

(e) Diesel and Electric engines light or with cabooses only ..... 50 MPH

When cabooses are handled in passenger service, train must not exceed speed of:

When handling cabooses X-100, X-198 to X-310.... 65 MPH  
cabooses X-330 to X-749 ..... 50 MPH

Trains handling non-revenue Great Northern cars that are equipped with "K" type air brake valves are to be operated in trains not exceeding 50 cars and at speeds not exceeding ..... 40 MPH

Trains handling, not in actual service, derricks, pile drivers, ditchers, cranes, shovels, Jordan Spreaders, wedge plows, etc.  
On Main Lines ..... 30 MPH

Except on six degree curves or sharper and on Branch Lines ..... 15 MPH

Trains handling ore cars or air dump cars loaded with ore or gravel and scale test car, on Main Lines..... 30 MPH

Except on 6 degree curves or sharper, and on Branch Lines ..... 20 MPH

Unless conditions require a further speed restriction, trains or engines moving against the current of traffic on double track through interlockings..... 15 MPH

Trains or engines moving on main routes actuating points of spring switches..... 35 MPH

Trains or engines moving in facing point direction at spring switches without facing point lock ..... 25 MPH

Trains or engines through No. 20 turnouts at: ..... 35 MPH

- End of double track at:
- Lohman, Pacific Jct., Cut Bank.
- Bainville, west switch westward siding.
- Blair, west siding switch.
- Brockton, east switch eastward siding.  
west switch westward siding.
- Poplar, east and west siding switch.
- Macon, east and west siding switch.
- Wolf Point, east switch westward siding.  
west switch eastward siding.
- Oswego, east and west siding switch.
- Glasgow, west switch westward siding.
- Hinsdale, east switch westward siding.  
west switch eastward siding.
- Saco, west switch eastward siding.  
east switch westward siding.
- Malta, east and west siding switch.
- Dodson, east and west siding switch.
- Survant, east and west siding switch.
- Havre, west lead switch.
- Pacific Jct. to and from Great Falls Line.
- Gilford, east and west siding switch.
- Dunkirk, east and west siding switch.

Trains or engines through No. 15 turnouts at: ..... 25 MPH

- Culbertson, east siding switch.
- Sprole, east and west siding switch.
- Glasgow, east switch eastward siding.
- Tiber, east and west siding switch.
- Shelby, east switch eastward siding.

Trains or engines through all other turnouts..... 15 MPH

(f) Open cars loaded with poles, piling, lumber, timber, pipe or other lading which might shift, shall be handled as far as possible in pole trains or local trains. Except at points where it is necessary to classify trains, such cars should be placed as close as possible to the head end of the train but shall not be placed immediately next to engines, or immediately next to caboose, occupied outfit cars or passenger cars. These commodities must not be placed in trains at such locations as will conflict with the rules governing the handling of explosives, inflammables or acids.

In double track territory, engineers on trains containing such cars must at all times use extreme care to avoid slack running in or out when passing or being passed by other trains.

On single track, trains containing such cars must be at stop when on siding or adjacent track when meeting or being passed by other trains, except when there are more cars than siding will hold, it is permissible for such train to pull by other train at restricted speed.

2. MOVEMENT OF ENGINES DEAD IN TRAINS.

Diesel and Gas-Electric engines 2302-2350 must be handled on rear of train.

Not less than five cars will be placed between steam engines moving dead in train.

Switcher and road type Diesel engines G. N. numbers 1 through 232 and 600 through 711 moving dead in freight trains are to be handled near rear of train and behind helper engines. Where more than one unit is moved such units must be separated by a freight car.

When towing multiple unit road type Diesel engines dead in freight trains, not more than four adjacent units are to be towed in a single grouping, separated from the road engine and additional groups by not less than five cars.

Trains handling steam engines with side rods on both sides will not exceed speed designated by Superintendent; and without side rods will not exceed ten MPH. Engines that have any of the truck or driving wheels removed will not be moved in a train without authority of Superintendent.

Trains handling Electric, Diesel and Gas-Electric engines in tow dead in train will not exceed following speeds:

Engine Number	Maximum Speed
1 to 28, 75 to 170.....	50 MPH
175 to 232, 247 to 249, 253 to 259, 262, 263, 271 to 274, 276 to 279, 307 to 317, 400 to 474, 550 to 583, 600 to 678, 681 to 711.....	65 MPH
250, 251, 260, 261, 266 to 270, 275, 280, 281, 350 to 365, 500 to 512, 679, 680.....	75 MPH
2303 to 2324.....	50 MPH
2325 to 2350.....	60 MPH
5000 to 5008.....	45 MPH
5010 to 5019.....	55 MPH

3. Under Rule 24, engine number only will be displayed in indicators on engines so equipped. This will also apply when our engines are operating over Northern Pacific tracks. Between Klamath Falls and Chemult, Southern Pacific Rules will govern.

4. When two or more Diesel or Electric engine units are coupled together the numerals and suffix letter, where provided, of the leading unit will be illuminated at all times when in service. The numerals and suffix letter of trailing units must not be illuminated.

The numerals and suffix letter of the leading unit only will be used in train orders as prescribed by Consolidated Code Rule 206.

5. Gas-Electric engines must not be fueled while occupied by passengers or coupled to cars occupied by passengers.

6. Air hose on Diesel and Electric engines must be hooked up in hose fastener when not in use.

7. **EMPLOYES WILL BE GOVERNED AS FOLLOWS ON ENGINES, PASSENGER AND FREIGHT CARS EQUIPPED WITH ROLLER BEARINGS:**

Roller bearing failures on cars or engines equipped with roller bearing journal boxes may be due to lack of oil or grease. If the box is not blazing, the oil plug in the cover should be removed and engine or valve oil added. Oil must never be added to a box that is blazing. Grease lubricated roller bearing boxes have grease plugs locked with metal strap which must be cut off with chisel before plug can be removed. After the oil has been added and plug replaced, the train should proceed at reduced speed and care exercised until it is apparent that the box will run cool. If fire develops in roller bearing box on any equipment, it must be closely watched, train moved slowly, and Superintendent notified from first available point of communication, who will prescribe for the movement.

Some engines and cars equipped with roller bearings have heat indicators or stench bombs inserted in the housing of boxes which release a strong pungent odor in the event of excessive journal box temperatures. When this odor is detected, train must be stopped at once and box located. Compare the temperature of this box with the other boxes on the same engine or car, check the oil level, and if there is no evidence of overheating, train may proceed, but if the box is overheating proceed only as instructed in the preceding paragraph.

Cars and engines equipped with roller bearings must not be allowed to stand alone, even on level track, without brakes being adequately applied.

8. **COOLING AND STEAM BOILER WATERING FACILITIES FOR DIESEL ENGINES ARE PROVIDED AT THE FOLLOWING INTERMEDIATE STATIONS:**

**First Subdivision**

Poplar .....Cooling Water only, at Depot.  
Glasgow .....At Depot.  
Malta .....150 Ft. East of Depot, North side of tracks.

**Second Subdivision**

Chester .....Cooling Water only, at Depot.  
Shelby .....At service stations.  
Cut Bank .....Cooling Water only, at Depot.

**Fourth Subdivision**

Conrad .....Cooling Water only, at Depot.

**Fifth Subdivision**

Helena .....At Yard Office.

**Sixth Subdivision**

Stanford .....In Box at Water Tank.  
Judith Gap .....In Box near Standpipe.

**Seventh Subdivision**

Hogeland .....At Engine House.

9. Under Rule 2, watches that have been examined and certified to by a designated inspector must be used by train dispatchers and yardmen.
10. Brakemen with less than one year of experience should not be used as flagman except in emergency, and then Superintendent will be notified by wire.
11. When operating snow machines in non-block signal territory, no train should be permitted to follow closer than a station apart; when that cannot be done, they will be blocked not less than thirty minutes apart.
12. After severe blizzard or dirt storm, employes on first train over road must exercise care to avoid accident caused by striking drift without first having drifts faced with hand shovels, cutting in far enough to get beyond the hard snow and giving a perpendicular wall to strike against instead of slope or wedgelike shape. When operating snow dozer, conductor in charge will ride in the dozer. On snow and dirt dozers every precaution must be taken to see that cage, flangers and wings clear all obstacles when in service and are properly secured when in through trains, and dozers properly turned. Hand screws must be tightened to raise flanger on dozers as high as possible before making a backup movement, and must not be released until the dozing work is actually to start. Hand screws holding the cage on dozers must be tightened or chains otherwise fastened except when dozer has air in cylinders and is attended by an employe.
13. Loaded dump cars should not be handled on double track after dark, but if necessary to do so, close watch must be kept by trainmen and if a car dumps its load, train must be stopped and protection afforded on the opposite track.
14. Unless otherwise provided, when passenger trains are operated against current of traffic on double track or through sidings, conductors shall notify Railway Postal Clerks, trains shall stop at points where U. S. Mail is usually picked up and conductors are responsible for delivery of mail to Postal car.
15. Conductors will report by wire all flat spots on wheels of passenger cars. Any cars having flat spots on wheels of more than two and one-half inches long must be set out.
16. Engineers finding flat spots on Diesel engines in excess of two and one-half inches will immediately notify Superintendent who will prescribe for their movement.
17. Due to limited overhead clearance at tunnels and structures, employes are warned to keep off top of cars of extreme height and width when handled in trains and yards, also such standing cars in electrified zone, except in emergency. In absence of previous advice on such cars, wire proper officer for instructions.
18. The Railway Company is responsible for proper handling of perishable freight on road and at points where Western Fruit Express Company do not maintain representatives. Conductors on trains handling perishable freight will ascertain from waybills class of service required and light or extinguish heaters and manipulate vents in accordance with current instructions provided for handling perishable freight issued by the National Perishable Freight Committee.
19. Placarded loaded tank cars handled in through freight trains shall not be nearer than 6th car from engine, occupied caboose or passenger car. Cars placarded "Explosives", "Inflammable", "Corrosive Liquids", or "Poison Gas" handled in through freight trains, local and mixed trains, shall not be nearer than 16th car from engine, occupied caboose or passenger car. When length of train will not permit handling of cars as prescribed above—ANY PLACARDED CAR, loaded with above commodities—shall be placed near middle of train, but not nearer than 2nd car from engine, occupied caboose or passenger car. When switching such cars in terminal yards they must be separated from engine by at least one non-placarded car.

When placarded cars described above are handled in freight trains made up in "blocks" or classifications, placarded car or cars shall be placed near middle of the "block" or classification, but not nearer than 6th car from engines, occupied caboose or passenger car.

When such placarded cars are placed in trains they must not be placed next to each other, next to refrigerators equipped with gas-burning heaters, stoves or lanterns, or next to loaded flat cars, or gondola cars containing lading higher than ends of car that is liable to shift.

Carload express shipments of explosives, sealed and placarded, may be handled on passenger trains; LCL shipments may be made in so-called peddler car with messenger in charge when such car is assigned to the handling of express and baggage exclusively.

Terminal or pick-up points enroute must furnish conductor and engineer Form 250 showing consecutively location in train of all cars placarded "Explosives". At points other than terminals where crews change, notice will be transferred from crew to crew.

Employees will be guided by further instructions governing handling of loaded tank cars, Explosives, Inflammables, Corrosive Liquids, and Poison Gas found in I.C.C. Regulations and Consolidated Code Rules 726(C) and 808.

20. In Automatic Block Signal territory, the absence of the lunar light on a spring switch signal, Rule 501 E, page 114, of the Consolidated Code, will not be regarded as an imperfectly displayed signal, as prescribed by Rule 27, when the Automatic Block Signal governing movement over such switch indicates "Proceed". This does not modify Rule D-524.

21. The normal position of a spring switch with facing point lock is identified by a color light type signal displaying a "lunar white" light for train or engine movements in a trailing point direction and for movements in facing point direction when conditions require.

The normal position of a spring switch without facing point lock is identified by a triangular yellow target on switch stand with letter "S" in black, and "lunar white" light in switch lamp in place of green light displayed in both directions through or over the switch.

Trains departing from stations, either from siding or main track in trailing point movement actuating points of spring switches, a member of crew must observe indication of governing signal in opposite direction after rear end of train has passed through switch to ascertain if switch points return to normal position. If this signal indicates stop and no immediate train movement or other cause is evidence report the fact to Superintendent from first available point of communication.

During and immediately following snow storms or violent wind storms, spring switches must be operated by hand and relined to normal position before heading out through switch in trailing point movement, actuating switch points, to insure switch is in proper operating condition.

#### INDICATORS AT SPRING SWITCHES.

Spring switch indicators consisting of a red and yellow light unit or a single yellow light unit (all units normally dark) mounted on an iron mast is located at the clearance point of a siding.

The switch-key-controller mounted on the mast must be operated by a member of the crew who, together with engineer, must observe and be governed by its indication before fouling main track or making movement from siding to main track through a spring switch in automatic signal territory, unless the movement is made immediately after an opposing train has passed the switch and Automatic Signal at leaving end of siding indicates "Proceed".

If Indicator displays a yellow light when switch-key-controller is operated, train or engine movement to main track may be made immediately in accordance with train rights and operating rules. Display of yellow light must continue until leading wheels have passed clearance point.

If Indicator does not display a yellow light when the switch-

key-controller is operated, train or engine movement to main track may be made in accordance with train rights and operating rules, after operating spring switch by hand; waiting three minutes and taking every precaution to provide proper protection.

To operate Switch Indicator, insert switch key in controller and turn clockwise toward "R", hold a few seconds and remove key. If yellow light is displayed and intended movement is not made, insert switch key in controller and turn counter-clockwise toward "N" to restore signal system to normal condition to avoid delay to trains on main track.

Switch-key-controller must never be operated toward "N" after having been operated toward "R" if intended movement to main track is to be made.

22. Facing point locks on hand operated switches are indicated by a six inch yellow stripe painted on target staff. Be positive locking device is restored to normal position after using. A running switch must not be made through this type switch.
23. **DRAGGING EQUIPMENT DETECTOR INDICATOR** consists of a single white light unit (normally dark) with circular background mounted on signal or other mast. When white light is displayed, train must be stopped and inspected for dragging equipment. Notify superintendent from first available point of communication.

24. Rule 204(A) prescribes that copies of train orders will be furnished the rear trainman, such orders will only be furnished on trains designated: Nos. 3, 4, 7, 8, 9, 10, 31, 32 and sections thereof; also extra passenger train whether operated as section of regular train or as a passenger extra.

25. **OSCILLATING EMERGENCY RED HEADLIGHT** will be immediately displayed by day or night when a train is disabled or stopped suddenly by an emergency application of air brakes or when engineer and conductor find it necessary to stop train due to some defect which might cause accident, over-running clearance point at meeting and waiting points, end of double track or junction.

Engineer of an approaching train observing display of emergency red headlight must stop before passing and be governed by conditions existing. If operating on adjacent track, ascertain and if safe for passage, then proceed at restricted speed until train is passed.

**OSCILLATING EMERGENCY RED REAR END LIGHT** is of two types—Automatic Control—Portable Manual Control—and except as otherwise provided, must be displayed by day or night each time train stops or is running at speed less than 18 MPH. Automatic Control type automatically functions in this manner. However, when train running at speed above 18 MPH and moving under circumstances in which it might be overtaken by another train or engine and during foggy and stormy weather, light may be operated manually with emergency switch and employees to afford other protection prescribed by rule.

**THE USE OF EMERGENCY RED HEADLIGHT AND REAR END LIGHT DOES NOT IN ANY WAY RELIEVE ENGINE-MEN AND TRAINMEN FROM RESPONSIBILITY OF COMPLYING WITH RULES 99 AND 102.**

Emergency red rear end light must be extinguished: when standing at origin and terminus stations of train run; when switching being performed from rear; when on siding to be passed by another train; and, when another train operating on adjacent track is approaching from rear, but not until it is known such train is not on same track.

Portable light must be removed before coupling to rear of such car.

Oscillating white light on engines will be displayed in addition to standard headlight governed by Rules 17 and 17B. In case of headlight failure it can be used as emergency headlight or as a focus light by push button control if desired.

Enginemen and trainmen on trains and engines equipped with oscillating emergency red lights must familiarize themselves with the operation of the lights.

26. Rule D-97 is in effect on this division.

**27. WHISTLE SIGNALS FOR INTERLOCKING ROUTES:**

Westward main track .....	2 long	1 short
Eastward main track .....	2 long	2 short
Westward siding .....	2 short	1 long
Eastward siding .....	2 short	2 long
Single track .....		4 short
Other diverging track .....	1 short	1 long

**FIRST SUBDIVISION**

(Main Line)

**1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**

Between	Passenger	Freight
Bainville and Havre .....	79 MPH	50 MPH

**2. SPEED RESTRICTIONS.**

Havre, passenger trains over lead and crossover switches westward main track opposite freight house platform ..... 8 MPH

**3. TRAIN REGISTER EXCEPTIONS.**

Glasgow, Nos. 31 and 32 will register by ticket.  
Bainville, all trains will register by ticket.  
Register of regular trains at Havre will cover their arrival at Lohman.

**4. SPEED TEST BOARDS.**

Engineers shall test speed of their trains passing following points as compared with Speed Table:

Westward—Between MP 283 and 285 approximately one mile west of Paisley.  
Eastward—Between MP 270 and 268 approximately one mile east of Whately.  
Eastward—Between MP 412 and 411 approximately 4.58 miles east of Lohman.

**5. SPRING SWITCHES WITH FACING POINT LOCK.**

Bainville, west switch westward siding.  
Culbertson, east siding switch.  
Blair, west siding switch.  
Brockton, east switch westward siding and west switch eastward siding.  
Sprole, east and west siding switch.  
Poplar, east and west siding switch.  
Macon, east and west siding switch.  
Wolf Point, east switch westward siding and west switch eastward siding.  
Glasgow, east and west switch to north #1.  
Hinsdale, east switch westward siding,  
west switch eastward siding.  
Saco, west switch eastward siding.  
Malta, east and west siding switch.  
Dodson, east and west siding switch.  
Survant, east and west siding switch.  
Havre, west lead switch to westward main track.

**6. DRAGGING EQUIPMENT DETECTOR INDICATORS.**

Westward, on signal:  
177.5, one mile east of east switch Blair.  
Westward, on Cable Post:  
One-fourth mile east of Poplar depot.  
Westward, on signal:  
309.7, one and one-half miles east of east switch Beaverton.  
Westward, on Cable Post:  
Three-fourths mile east of Malta depot.  
Eastward, on signal:  
208.4, one and one-fourth miles west of west switch Poplar.  
Eastward, on signal:  
179.8, at west switch Blair.

Eastward, on Cable Post:

One and one-half miles west of west switch Malta.

Eastward, on signal:

311.8, at west switch Beaverton.

Eastward, on signal:

280.6, one and one-fourth miles east of east switch Paisley.

**7. SWITCH INDICATORS.**

Wiota.

Push buttons and instructions for their operation are in the iron box locked with a switch lock.

The member of the crew who is to line switches must first operate push button "R" for route desired and hold few seconds. Both trainman and engineer must observe and be governed by the indicator before lining switch or fouling main track.

**8. AUTOMATIC INTERLOCKINGS.**

Lohman .....end of double track  
Instructions for operating electric switch lock on industry track posted in box.

**9. Freight trains will make running inspection at Glasgow.****SECOND SUBDIVISION**

(Main Line)

**1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**

Between	Passenger	Freight
Havre and Cut Bank .....	79 MPH	50 MPH

**2. SPEED RESTRICTIONS.**

Havre, passenger trains over lead and crossover switches westward main track opposite freight house platform ..... 8 MPH  
Between home signals of interlocking, Shelby..... 20 MPH  
Between Depot and MP 1089.8, 1000 feet east of depot  
at Cut Bank, through crossover ..... 30 MPH  
Bridge No. 1042.3 to a point 1500 feet west, Galata..... 45 MPH  
In double track territory, trains against the current  
of traffic between:  
Shelby and Cut Bank .....Freight 40 MPH

**3. TRAIN REGISTER EXCEPTIONS.**

Shelby, all trains register by ticket.  
Register of regular trains at Havre will cover their arrival at Pacific Jct.  
Cut Bank, first class trains and passenger extras register by ticket.

**4. CLEARANCE PROVISIONS & EXCEPTIONS, RULE 83 (B).**

Pacific Jct., trains for which this point is the initial station may proceed on authority of clearance under which such trains arrive, eastward trains will proceed to Havre with the current of traffic when signals indicate proceed.  
Clearances received at Sweet Grass will clear eastward trains at Sweet Grass Line Jct.

**5. RESTRICTED CLEARANCES.**

Shelby, turnouts are located so close together at end of double track and crossover east thereof, also turnout at east end south 3 track and west end industry track that engines cannot safely operate on both turnouts at same time and movements of this kind are prohibited.

**6. Shelby, Nos. 3 and 4 must proceed at restricted speed between end of Fourth Subdivision and passenger station and will use first track south of main track.****7. CROSSOVERS ON DOUBLE TRACK.**

Facing Point	Trailing Point
Cut Bank	Shelby, west crossover
	Ethridge
	Baltic

### 8. SPRING SWITCHES WITH FACING POINT LOCK.

Havre, west lead switch to westward main track.  
 Gildford, East and west siding switch.  
 Buelow, East switch eastward siding.  
     West switch westward siding.  
 Tiber, East and west siding switch.  
 Devon, East and west siding switch.  
 Dunkirk, East and west siding switch.  
 Shelby, East lead switch, west switch westward siding.  
 Cut Bank, East siding switch.

### 9. DRAGGING EQUIPMENT DETECTOR INDICATORS.

Eastward, on signal:  
     967.6, two miles east of Burnham.  
 Westward on cable post:  
     1400 ft. east of Depot, Cut Bank.

### 10. MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.

Shelby .....End of double track.  
 Cut Bank .....Crossover, 1000 feet east of Depot  
     End of double track east and west end Bridge 1090.8.

Switches are controlled by operator at depot.

When a yellow indication (normally dark) is displayed below two red indications on the governing home signal, it insures route is lined and locked and confers authority (AFTER STOPPING) to pass through Interlocking Limits at restricted speed, then proceed in accordance with train rights and operating rules expecting to find track occupied beyond Interlocking Limits.

### 11. SWITCH INDICATORS.

Sweet Grass Line Jct., separate indicators are provided for eastward and westward tracks, located at crossovers on north side of center of Shelby Yard. The member of the crew who is to line switches must first operate push button "R" for route desired and hold a few seconds. Both trainmen and enginemen must observe and be governed by the indicator before lining switches or fouling main track. Push Button and instructions are in iron box locked with a switch key.

### 12. SEMI-AUTOMATIC INTERLOCKINGS.

Pacific Junction .....  
 Interlocking operates automatically for all movements with the current of traffic and for westward Third Subdivision trains when running against the current of traffic, except for westward trains destined Great Falls with the current of traffic switches are controlled from depot, Havre. Switches must be operated by hand for other movements. See further instructions posted in box.

### 13. Outgoing crews of freight trains will make running inspection at Cut Bank.

## THIRD SUBDIVISION

(Havre Line)

### 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
Pacific Jct. and Great Falls .....	59 MPH	40 MPH

### 2. TRAIN REGISTER EXCEPTIONS.

Great Falls, register only for first class trains and passenger extras.  
 Register of regular trains at Havre will cover their arrival at Pacific Jct.

### 3. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).

Pacific Jct., trains for which this point is the initial station may proceed on authority of clearance under which such trains arrive, eastward trains will proceed to Havre with the current of traffic when signals indicate proceed.

### 4. Great Falls, normal position of switch east end Missouri River bridge No. 119.4, is for Fourth Subdivision.

### 5. SPEED TEST BOARDS.

Engineers shall test speed of their trains passing following points as compared with Speed Table:  
 Westward—Between MP 4 and MP 6 approximately four miles west of Pacific Jct.  
 Eastward—Between MP 107 and MP 105 approximately one mile east of Sheffels.

### 6. EMERGENCY TELEPHONES.

175 feet east MP 71 .....	Watchman Cabin
265 feet west MP 74 .....	Watchman Cabin
1000 feet west MP 118 .....	Booth

### 7. SEMI-AUTOMATIC INTERLOCKINGS.

Pacific Jct. ....Junction with Second Subdivision  
 Interlocking operated automatically for all movements with the current of traffic and for westward trains when running against the current of traffic, except for westward trains destined Great Falls with the current of traffic switches are controlled from depot, Havre. Switches must be operated by hand for other movements. See further instructions posted in iron box.

## FOURTH SUBDIVISION

(Shelby Line)

### 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
West Side Jct. and Collins .....	50 MPH	40 MPH
Collins and Shelby .....	59 MPH	45 MPH
Sweet Grass Line Jct. to MP 114, 6 miles east of Kevin .....	35 MPH	20 MPH
MP 114, 6 miles east of Kevin to Sweet Grass..	35 MPH	25 MPH

### 2. TRAIN REGISTER EXCEPTIONS.

Great Falls, register only for first class trains and passenger extras.  
 First class trains register by ticket at West Side Junction.  
 Emerson Jct., Vaughn, Power, Conrad register only for trains originating and terminating.  
 Shelby, trains Nos. 3 and 4 will register by ticket.

### 3. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).

Great Falls, westward CMStP&P RR. trains departing from Milwaukee passenger station will obtain clearance from G. N. dispatcher.  
 Clearance received at Shelby will clear westward trains at Sweet Grass Line Jct.

### 4. Shelby, normal position of the switch at the end of the Fourth Subdivision will be for the Fourth Subdivision.

### 5. Shelby, Nos. 3 and 4 must proceed at restricted speed between end of Fourth Subdivision and passenger station and will use first track south of main track.

### 6. West Side Jct., normal position of junction switch is for Fourth Subdivision.

### 7. Emerson Jct., normal position of junction switch is for Great Northern.

### 8. SPEED TEST BOARDS.

Engineers shall test speed of their trains passing following points as compared with Speed Table:  
 Westward—Between MP 9 and MP 11 approximately one mile west of Manchester.  
 Eastward—Between MP 98 and MP 96 approximately one and one-fourth miles east of Shelby.

### 9. SWITCH INDICATORS.

Sweet Grass Line Jct., separate indicators are provided for eastward and westward tracks, located at crossovers on north side of center of Shelby Yard. The member of the crew who is to line switches must first operate push button "R" for route desired

and hold a few seconds. Both trainmen and enginemen must observe and be governed by the indicator before lining switches or fouling main track. Push Button and instructions are in iron box locked with a switch key.

## FIFTH SUBDIVISION

(Butte Line)

### 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
Great Falls and Butte .....	59 MPH	30 MPH

### 2. SPEED RESTRICTIONS.

Helena .....	15 MPH
--------------	--------

### 3. TRAIN REGISTER EXCEPTIONS.

West Side Junction Nos. 235-236 and passenger extras will not register.

### 4. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).

West Side Jct., first and second class trains and passenger extras for which this point is initial station may proceed on authority of clearance under which such trains arrive.

### 5. Cars loaded with poles, pipe or similar lading that might shift must be handled second behind engine. Crews must closely observe such lading to see if safe before passing through tunnels.

### 6. West Side Jct., normal position of junction switch is for Fourth Subdivision.

### 7. Tunnel No. 6 Amazon, when signal displays Stop-indication Rule 509(A) governs.

### 8. Butte, train and engine movements over Garden and Warren Avenues will be protected by assigned watchmen between the hours of 8:00 AM and 11:59 PM daily. All train and engine movements over these crossings must be protected by a member of the crew on the ground at the crossing in advance of movement outside of assigned hours of watchmen.

### 9. SPEED TEST BOARDS.

Engineers shall test speed of their trains passing following points as compared with Speed Table:

Westward—Between MP 139 and MP 141 approximately three miles west of Riverdale.
Eastward—Between MP 276 and MP 274 approximately one mile east of Woodville.

### 10. EMERGENCY TELEPHONES.

Hardy, 500 feet west tunnel No. 1 .....	Watchman Cabin
Boulder, 3 mi. west of .....	Watchman Cabin
Hardy Pit, 2600 feet east main line switch.....	Booth
Lahey Spur, .74 mi. west of Corbin.....	Booth
Wickes, 3.77 mi. west of Corbin.....	Booth
Tunnel No. 6, east end .....	Booth

### 11. AUTOMATIC INTERLOCKINGS.

Helena, 2.59 miles east of .....	N. P. Ry. crossing
Butte, 1.50 miles east of .....	N. P. Ry. crossing

### 12. RAILROAD CROSSINGS PROTECTED BY GATES.

Helena, 1.87 miles east of .....	N. P. Ry. Industry track.
----------------------------------	---------------------------

Normal position is clear for Great Northern.

## SIXTH SUBDIVISION

(Billings Line)

### 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
Great Falls and West Switch		
Belmont .....	59 MPH	40 MPH
West Switch Belmont and		
East Switch Acton .....	59 MPH	50 MPH
East Switch Acton and		
Mossmain .....	50 MPH	40 MPH

### 2. TRAIN REGISTER EXCEPTIONS.

Great Falls register only for first class trains, passenger extras and second class trains to and from Fifth and Sixth Subdivisions except No. 495 and No. 496.

Moccasin, register only for trains originating and terminating. Mossmain, register for trains originating and terminating at Billings.

### 3. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).

Great Northern clearance received at Billings and Laurel will clear trains at Mossmain.

Moccasin, trains for which this point is initial station may proceed on authority of clearance under which such train arrives, providing train order signal indicates proceed.

### 4. Great Falls, normal position of switch east end Missouri River bridge No. 119.4, is for Fourth Subdivision.

### 5. Moccasin, normal position of junction switch is for Sixth Subdivision.

### 6. Tunnel Q-1, between Acton and Rimrock, automatic block signals govern movement of trains.

### 7. SPEED TEST BOARDS.

Engineers shall test speed of their trains passing following points as compared with Speed Table:

Westward—Between MP 6 and MP 8 approximately two miles west of Hesper.
Eastward—Between MP 217 and MP 215 approximately one-half mile east of Fields.

### 8. EMERGENCY TELEPHONES.

Tunnel Q-1, East End .....	Watchman's Cabin.
Baseline Spur .....	West End.
Cushman .....	East End.

### 9. MOSSMAIN, ELECTRIC SWITCH LOCKS.

Automatic signal 12.8 located 1000 feet west of west wye switch governs eastward train movements on east leg of wye. Normal position of junction switches at Mossmain is for Northern Pacific main track.

The following switches and derails are equipped with electric switch locks:

Derail near signal 118 on east leg of wye.

Derail near signal 123 on west leg of wye.

Both switches of crossover between main tracks leading to west leg of wye.

West switch of crossover from yard to eastward main track near signal 124.

East switch of crossover east of Laurel Yard office.

Trainmen will be governed as follows in the operation of these electric switch locks:

Open door of Electric switch lock and if indicator shows Proceed, move lock lever to the left which will unlock switch. If indicator shows Stop and no conflicting train movement is evident, open door of release box and operate push button. This will start operation of clockwork release. After time interval of three minutes indicator will show Proceed and switch can be unlocked by moving lock lever to the left. Westward trains making crossover movement at signal 121 to the yard and eastward trains making crossover movement at signal 122 to west leg of wye must stop within 200 feet of the signal in order to

unlock electric lock at far end of crossover. If stop is made more than 200 feet from signal, electric locks cannot be operated without use of the clockwork release.

After movement is completed, restore switches and lock levers to normal position locking door of electric locks and release boxes.

## SEVENTH SUBDIVISION

(Hogeland Line)

### 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
Saco and Hogeland .....	30 MPH	25 MPH

## EIGHTH SUBDIVISION

(Lewistown Line)

### 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
Lewistown and Moccasin .....	35 MPH	20 MPH

### 2. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).

Moccasin, trains for which this point is initial station may proceed on authority of clearance under which such train arrives, providing train order signal indicates proceed.

Spring Creek Jct., Trains for which this point is initial station may proceed on authority of clearance under which such trains arrive.

Lewistown, westward Great Northern trains departing from Great Northern passenger station will obtain clearance from G. N. and CMStP&P dispatchers.

3. Moccasin, normal position of junction switch is for Sixth Subdivision.
4. Spring Creek Jct., normal position of junction switch is for CMStP&P RR.
5. Lewistown, transfer track will be used as a main track by Great Northern trains moving to and from CMStP&P main track and must be kept clear.
6. Lewistown and Moccasin, CMStP&P RR. bulletin boards located in depot.

## NINTH SUBDIVISION

(Augusta Line)

### 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
Vaughn and Augusta .....	25 MPH	20 MPH

### 2. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).

Vaughn, trains for which this point is initial station may proceed on authority of clearance under which such train arrives, providing train order signal indicates proceed.

3. Vaughn, normal position of junction switch is for Fourth Subdivision.
4. Dracut Jct., normal position of junction switch is for Great Northern.

## TENTH SUBDIVISION

(Pendroy Line)

### 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
Power and Pendroy .....	25 MPH	20 MPH

### 2. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).

At Eastham Jct., Choteau Jct., trains for which these points are initial stations may proceed on authority of clearance under which such trains arrive.

Power, trains for which this point is initial station may proceed on authority of clearance under which such train arrives, providing train order signal indicates proceed.

3. Power, normal position of junction switch is for Fourth Subdivision.
4. Eastham Jct., Choteau Jct., normal position of junction switch is for CMStP&P RR.
5. Power and Pendroy, CMStP&P RR. bulletin boards located in depot.

## WATCH INSPECTORS

Bainville.....	Agent—Comparison only.
Butte .....	S & S Jewelers.
Conrad .....	Harold Pyle.
Cut Bank .....	Roush's Jewelry.
Glasgow .....	Bowles Jewelry. R. E. St. Clair.
Great Falls .....	Jim Kovich. Sutherland Jewelry. Russell's Jewelry.
Havre .....	Blacks' Jewelry.
Helena .....	S. & M Jewelers.
Laurel .....	Dudis Jewelry.
Lewistown .....	Scheldt Jewelers.
Saco .....	Agent—Comparison only.
Shelby .....	Stulls Jewelry.
Whitefish .....	Burr's Jewelry.
Williston .....	R. M. Gross.





## SPEED TABLE





Time Min.	Per Mile Sec.	Miles Per Hour	Time Min.	Per Mile Sec.	Miles Per Hour
	40	90.0	1	12	50.0
	41	87.8	1	14	48.6
	42	85.7	1	16	47.4
	43	83.7	1	18	46.2
	44	81.8	1	20	45.0
	45	80.0	1	22	43.9
	46	78.3	1	24	42.9
	47	76.6	1	26	41.9
	48	75.0	1	28	40.9
	49	73.5	1	30	40.0
	50	72.0	1	33	38.7
	51	70.6	1	36	37.5
	52	69.2	1	39	36.4
	53	67.9	1	42	35.3
	54	66.7	1	45	34.3
	55	65.5	1	50	32.7
	56	64.3	1	55	31.3
	57	63.2	2	0	30.0
	58	62.1	2	10	27.7
	59	61.0	2	20	25.7
1	0	60.0	2	30	24.0
1	1	59.0	2	40	22.5
1	2	58.1	3	0	20.0
1	3	57.1	3	30	17.1
1	4	56.3	4	0	15.0
1	5	55.4	5	0	12.0
1	6	54.5	6	0	10.0
1	7	53.7	7	0	8.6
1	8	52.9	8	0	7.5
1	9	52.2	9	0	6.7
1	10	51.4	10	0	6.0

## Business Tracks not Shown as Stations on Time Table.

NAME	LOCATION	Capacity Cars	SWITCH OPENS
<b>First Subdivision</b>			
Saco Stock Yards .....	1.70 miles west of Saco .....	27	Both ends
Malta Stock Yards .....	2.07 miles east of Malta .....	47	Both ends
Harlem Stock Yards .....	1.29 miles east of Harlem .....	30	Both ends
Harlem Beet Track .....	0.76 miles west of Harlem .....	44	Both ends
<b>Second Subdivision</b>			
Union Oil Spur (Three Tracks) .....	4.66 miles east Cut Bank .....	8-10-14	East end
<b>Fourth Subdivision</b>			
Pondera Pipe Line Spur .....	2.97 miles east of Conrad .....	37	East end
Aronow Spur .....	2.17 miles west of Kevin .....	3	East end
Superior Spur .....	4.06 miles west of Kevin .....	2	East end
The Texas Co. ....	0.63 miles east of Sunburst .....	122	Both ends
<b>Fifth Subdivision</b>			
Cascade Stock Yard .....	0.52 miles east of Cascade .....	42	Both ends
Tintinger Spur .....	2.72 miles east of Hardy .....	73	East end
Hardy Pit .....	1 mile east of Hardy .....	118	West end
Mortenson's Spur .....	Opens off Hardy Pit Track 2400 feet from Main Line Switch .....	48	
Car-Con Spur .....	1.84 miles west of Helena .....	30	East end
Lahey .....	0.74 miles west of Corbin .....	9	Both ends
Wickes .....	3.77 miles west of Corbin .....	9	West end
<b>Sixth Subdivision</b>			
Baseline Spur .....	1.90 miles east of Rimrock .....	25	West end
Lavin Spur .....	At Gerber .....	Yard	West end
Bovey's Elevator Spur .....	1.94 miles west of Swift .....	12	East end
<b>Ninth Subdivision</b>			
Beet Track .....	0.53 miles west of Vaughn .....	44	Both ends
<b>Tenth Subdivision</b>			
Flume Spur .....	3.86 miles west of Bole .....	14	East end
Hobson Elevator Spur .....	3.75 miles east of Choteau .....	16	West end
Koyl Spur .....	7.87 miles west of Choteau .....	8	East end



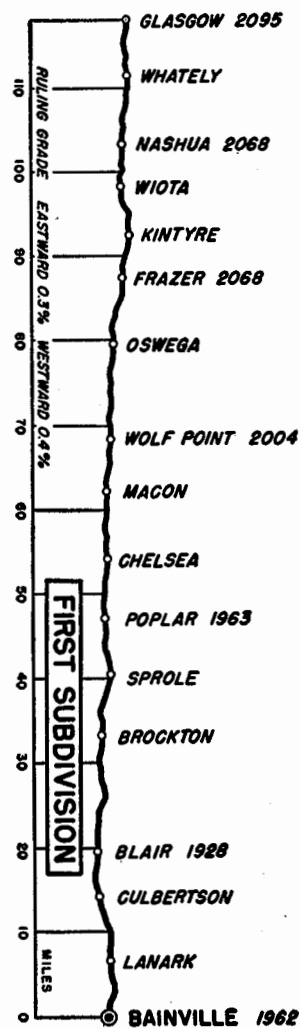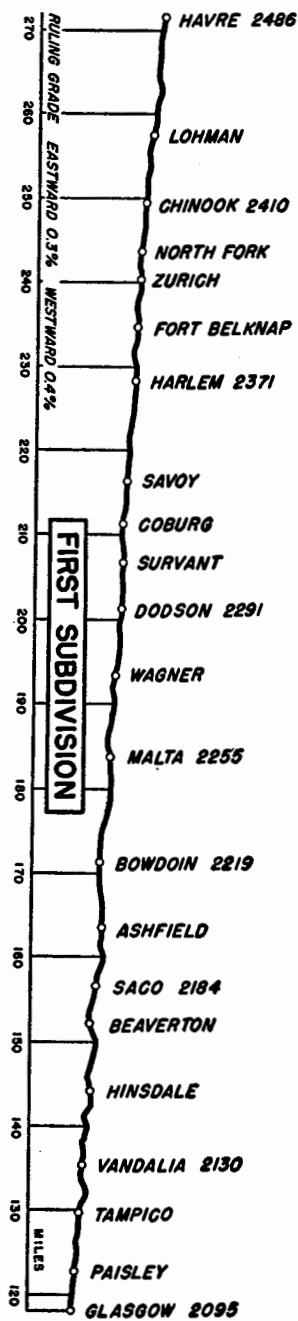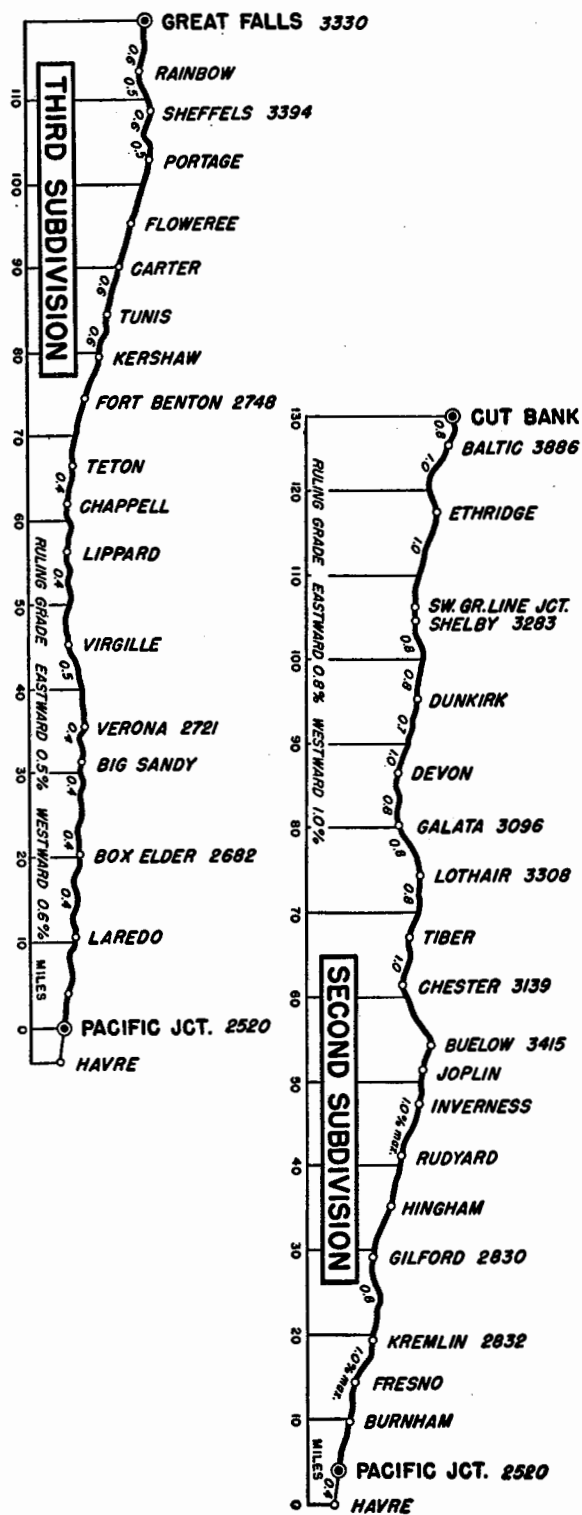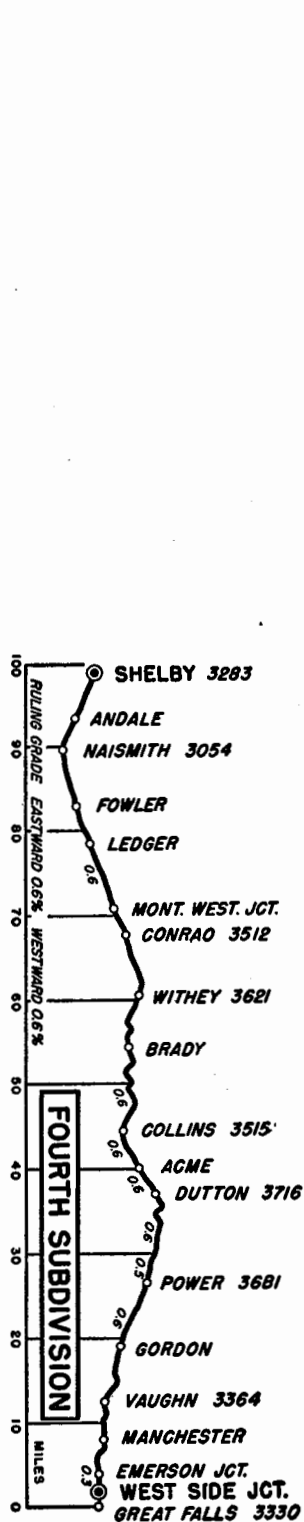

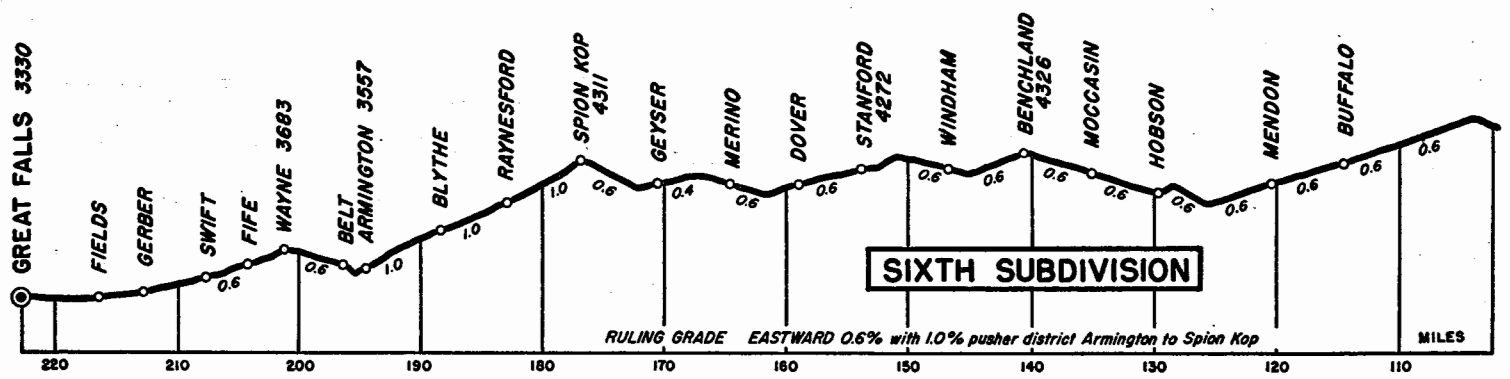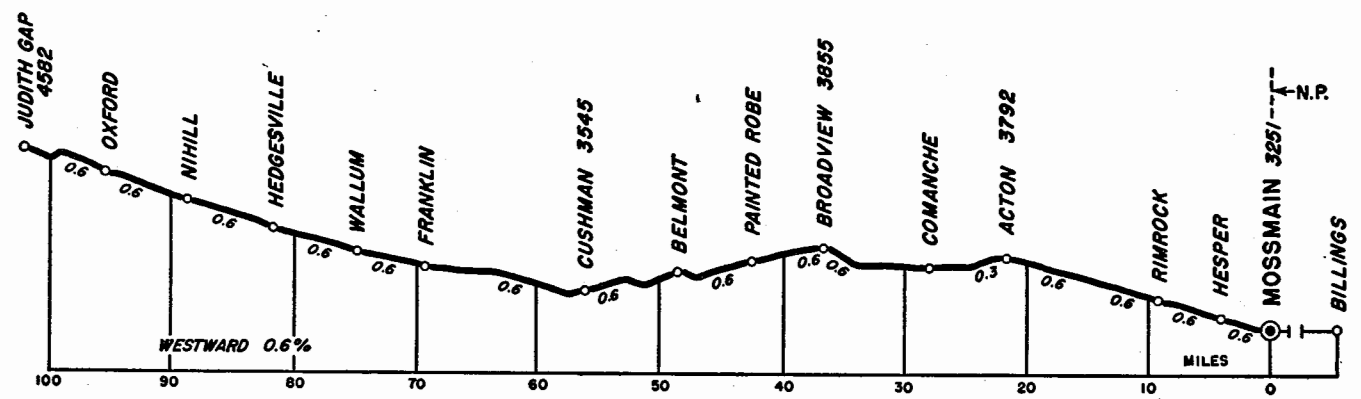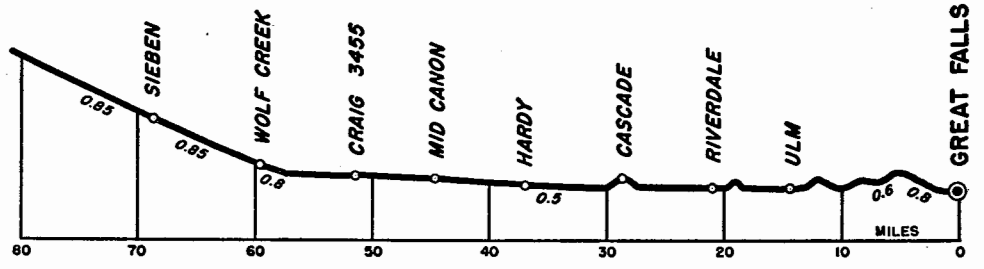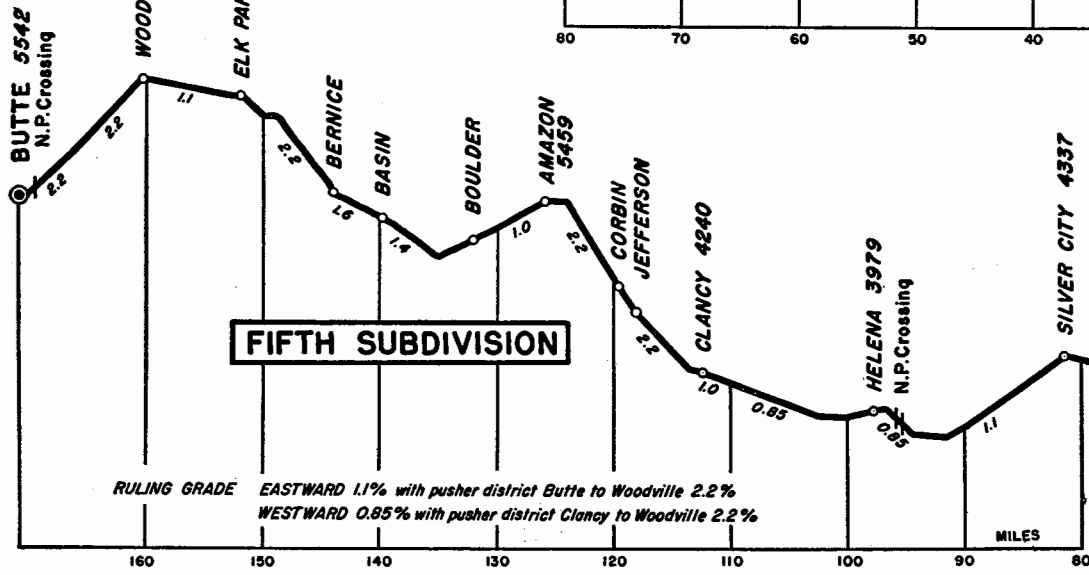

Pages 19 and 20 are blank.