

## RULE 10-I

Oral authorization and acknowledgements, between foreman and engineers, for trains to pass red "Conditional Stop" signs, must be worded in the following forms:

### FOREMAN'S RESPONSE

THIS IS SP FOREMAN \_\_\_\_\_  
AT MP \_\_\_\_\_ CALLING SP (TRAIN NO.) \_\_\_\_\_.  
(AFTER ENGINEER ANSWERS GIVING PROPER IDENTIFICATION)

THIS IS SP FOREMAN \_\_\_\_\_ IN  
CHARGE OF WORK BETWEEN MP \_\_\_\_\_ AND MP \_\_\_\_\_  
SP TRAIN ORDER NO. \_\_\_\_\_  
WE ARE IN THE CLEAR AND YOU MAY  
PROCEED PAST THE RED CONDITIONAL STOP  
SIGN AND THROUGH THE LIMITS OF THE  
ORDER AT \_\_\_\_\_ MPH, REPEAT \_\_\_\_\_ MPH\*.

### ENGINEER'S RESPONSE

THIS IS ENGINEER OF SP TRAIN NO. \_\_\_\_\_  
I MAY PROCEED PAST THE RED CONDITIONAL  
STOP SIGN AND THROUGH THE LIMITS OF  
ORDER NO. \_\_\_\_\_ BETWEEN MP \_\_\_\_\_ AND  
MP \_\_\_\_\_ AT \_\_\_\_\_ MPH\*, REPEAT \_\_\_\_\_ MPH\*.

### FOREMAN MUST ACKNOWLEDGE ENGINEER'S RESPONSE AS FOLLOWS:

SP TRAIN ORDER NO. \_\_\_\_\_, BETWEEN  
MP \_\_\_\_\_ AND MP \_\_\_\_\_, \_\_\_\_\_ MPH\* OK.

\*WHERE NO SPEED RESTRICTION IS  
REQUIRED, FOREMAN WILL TELL ENGINEER  
"AT MAXIMUM AUTHORIZED SPEED".

WHEN FORM Y TRAIN ORDER IS USED IN  
MULTIPLE MAIN TRACK TERRITORY WHERE  
TRAINS MAY OPERATE IN EITHER DIRECTION,  
FOREMAN'S ORAL AUTHORIZATION MUST  
INDICATE THE MAIN TRACK ON WHICH MOVE-  
MENT IS AUTHORIZED.

# Southern Pacific Transportation Company



## SAN ANTONIO DIVISION TIMETABLE

# 12

EFFECTIVE SUNDAY, OCTOBER 31, 1982  
AT 12:01 A.M.  
CENTRAL STANDARD TIME

W. J. LACY,  
*Vice President - Transportation.*

R. D. BREDENBERG,  
*General Manager.*

L. G. SIMPSON,  
*Assistant Vice President -  
Operations Planning and Control.*

R. G. McWHIRTER,  
*Superintendent.*

A. M. HENSON,  
R. S. HATFIELD,  
R. D. MALDONADO,  
*Assistant Superintendents.*



**TERMINAL SUPERINTENDENTS**

H. C. BALLANCE ..... San Antonio  
 D. W. WILLS ..... Dallas

**ASSISTANT TERMINAL SUPERINTENDENTS**

W. B. COGSWELL ..... San Antonio  
 O. G. COFFEY ..... San Antonio  
 N. G. BULOT ..... Dallas  
 J. A. HARWELL ..... Dallas

**TRAINMASTERS**

D. G. ELLIS ..... Sanderson  
 J. W. CLARK ..... Del Rio  
 T. M. RYAN ..... Ennis  
 T. P. KELLY ..... San Antonio  
 J. K. JACOBS ..... San Antonio  
 R. J. MOWREY ..... Hearne

**TRAINMASTER/ROADFOREMAN OF ENGINES**

R. G. HUFF ..... Austin

**ASSISTANT TRAINMASTERS**

D. L. JORDAN ..... San Antonio  
 R. L. ESSARY ..... Dallas

**ROAD FOREMEN OF ENGINES**

J. D. FRANKS ..... El Paso  
 J. A. HURLEY ..... Del Rio  
 R. CAMPBELL ..... San Antonio  
 B. J. BAKER ..... Ennis

**CHIEF TRAIN DISPATCHERS**

R. E. BAILEY ..... San Antonio  
 F. G. BEAUDOIN ..... San Antonio  
 F. G. BEAUDOIN, III ..... San Antonio  
 W. R. BEAUDOIN ..... San Antonio

**GENERAL YARDMASTER**

N. T. DENSON ..... San Antonio

**MANAGER OF DISPATCHING OPERATIONS**

E. L. HORD ..... Houston

**ASSISTANT MANAGERS OF DISPATCHING OPERATIONS**

J. L. REININGER ..... San Antonio  
 B. L. BALDWIN ..... Houston  
 F. J. SIEMS ..... Houston

**SP — AMTRAK**

R. B. LUTTON, Trainmaster ..... San Antonio  
 T. R. MALISH, Trainmaster ..... San Antonio  
 J. W. WILSHIRE, Trainmaster ..... Oakland  
 L. L. LAPORTE, Assistant Trainmaster ..... Oakland  
 I. YOUNG JR, Trainmaster ..... Los Angeles  
 W. E. MOFFETT, Trainmaster ..... Los Angeles  
 G. M. TODD, Trainmaster ..... Los Angeles

**TABLE OF CONTENTS**

Valentine Subdivision	Austin Subdivision	
Schedule Page ..... 2	Dalsa Line ..... 18	
Special Instructions ..... 4	Giddings Branch ..... 18	
Del Rio Subdivision	Cameron Branch ..... 18	Valentine Subdiv.
Schedule Page ..... 7	Shiner Branch ..... 18	
Kerrville Branch ..... 9	Llano Branch ..... 20	
Eagle Pass Branch ..... 9	Marble Falls Branch ..... 20	
Special Instructions ..... 9	Special Instructions ..... 20	
San Antonio Yard Limits	Ennis Subdivision	
Corpus Christi Line ..... 12	Schedule Page ..... 26	
Special Instructions ..... 13	Fort Worth Branch ..... 28	
Flatonia Subdivision	Athens Branch ..... 28	Del Rio Subdiv.
Schedule Page ..... 15	Special Instructions ..... 29	
Gonzales Branch ..... 15	Haz. Mat. Placement	
Special Instructions ..... 16	Chart ..... 34	
	Miller Yard	
	Special Instructions ..... 37	
	All Subdivision	
	Special Instructions ..... 40	
	Division Map ..... 67	San Antonio Yard

**SPEED TABLE**

Time Per Mile		Miles Per Hour	Time Per Mile		Miles Per Hour	Time Per Mile		Miles Per Hour
Mins.	Sec.		Mins.	Sec.		Mins.	Sec.	
—	45	80.0	1	08	52.9	1	46	34.0
—	46	78.3	1	10	51.4	1	48	33.3
—	47	76.6	1	12	50.0	1	50	32.7
—	48	75.0	1	14	48.6	1	52	32.1
—	49	73.5	1	16	47.4	1	54	31.6
—	50	72.0	1	18	46.1	1	56	31.0
—	51	70.6	1	20	45.0	1	58	30.5
—	52	69.2	1	22	43.9	2	—	30.0
—	53	67.9	1	24	42.9	2	05	28.8
—	54	66.6	1	26	41.9	2	10	27.7
—	55	65.5	1	28	40.9	2	15	26.7
—	56	64.2	1	30	40.0	2	24	25.0
—	57	63.2	1	32	39.1	2	30	24.0
—	58	62.6	1	34	38.3	2	45	21.8
—	59	61.0	1	36	37.5	3	—	20.0
1	—	60.0	1	38	36.8	3	30	17.1
1	02	58.0	1	40	36.0	4	—	15.0
1	04	56.2	1	42	35.3	5	—	12.0
1	06	54.2	1	44	34.6	6	—	10.0

Valentine Subdiv.  
 Del Rio Subdiv.  
 San Antonio Yard  
 Flatonia Subdiv.  
 Austin Subdiv.  
 Ennis Subdiv.  
 Miller Yard  
 All Subdivs.

**VALENTINE SUBDIVISION**

EAST-WARD FIRST CLASS	Mile Post	STATIONS	Station Number	WEST-WARD
				FIRST CLASS
2 Psgr				1 Psgr
Leave Mon Thur Sat			Arrive Sun Tue Thur	
PM 5.45	829.3	TO-R EL PASO (Tower 196) BKIPQ 1.6		PM 4.10
	827.7	TO-R EL PASO (Cotton Ave.) BKIYPQ 0.2	55005	3.15
5.50	827.5	TOWER 47 IPQ 4.7	50042	
6.00	822.8	ALFALFA BPQ 7.6	55060	2.55
	815.2	BELEN 7.2	60013	2.45 PM
	808.0	8705 CLINT 7.8	60021	
	800.2	FABENS 6.2	60029	
	794.0	8589 TORNILLO 10.4	60036	
	783.6	9978 ISEER 13.5	60046	
	770.1	8306 McNARY 9.2	60059	
	760.9	7835 FINLAY 5.7	60067	
	751.3	8479 SMALL	60080	
	746.1	8507 LASCA 9.2	60085	
	736.9	10425 SIERRA BLANCA KPQ 10.8	60090	
	726.1	8375 MALLIE P 11.5	60111	
	714.6	9368 HOT WELLS P 10.9	60125	
	703.7	8661 COLLADO P 12.6	60135	
	691.1	8394 LOBO P 11.2	60148	
	679.9	8366 WENDELL P 12.1	60162	
	667.8	8071 VALENTINE BKQP 7.8	60171	
	660.0	8399 QUEBEC P 8.4	60179	
	651.6	8362 RYAN P 8.7	60187	
	642.9	8410 ARAGON P 10.1	60196	
	632.8	8375 MARFA P 12.7	60210	
	620.1	8647 PAISANO P 10.3	60223	
	609.8	8314 ALPINE JUNCTION P 2.6	60234	
s 9.20	607.2	ALPINE KPQ 6.6	60240	s 11.35 AM
	600.6	8056 STROBEL P 8.8	60247	
	591.8	8757 ALTUDA P 7.6	60256	
	584.2	8377 LENOX P 8.2	60264	
	576.0	8385 MARATHON P 8.5	60272	
	567.5	8209 WARWICK P 7.5	60280	
	560.0	8268 HAYMOND P 7.5	60284	
	552.4	8322 TESNUS P 6.4	60288	
	546.0	8535 MAXON P 5.8	60293	
	540.4	8386 ROSENFELD P	60299	
	533.0	8361 LONGFELLOW P 8.1	60309	
	524.9	8470 EMERSON P 9.0	60318	
s 11.00 PM	515.9	9061 TO-R SANDERSON BKQP	60336	9.55 AM
Arrive Mon Thur Sat		(309.3)		Leave Sun Tue Thur
2				1

**VALENTINE SUBDIVISION**

**MAXIMUM AUTHORIZED SPEED FOR TRAINS**

BETWEEN	PSGR	FRT
<b>EL PASO and SANDERSON</b>	<b>70</b>	<b>70</b>
<b>Exceptions:</b>	<b>PSGR</b>	<b>FRT</b>
820.0 and 815.2		
(Both tracks with current of traffic)	40	40
759.4 and 758.0	55	55
700.5 and 672.0	70	60
662.4 and 652.4	70	60
640.4 and 638.3	60	60
638.3 and 638.1	50	50
633.6 and 629.1	60	60
629.1 and 629.0	45	45
625.3 and 624.2	55	55
621.1 and 616.6	50	50
616.6 and 610.7	60	60
<b>Exceptions:</b>	<b>PSGR</b>	<b>FRT</b>
610.7 and 604.9	50	50
604.9 and 601.5	40	40
601.5 and 598.6	50	50
589.1 and 588.5	40	40
584.9 and 584.1	60	60
575.7 and 575.3	40	40
559.9 and 559.0	40	40
551.8 and 547.5	50	50
547.5 and 547.1	40	40
547.1 and 536.9	50	50
536.9 and 536.7	45	45
532.0 and 516.9	50	50
516.9 and 515.9	30	30

"K" trains must not exceed 30 MPH between:  
 Ysleta ..... MP 820.0 and MP 815.2  
 Fabens ..... MP 801.0 and MP 799.6

The following establishes the maximum allowable speed for freight trains provided speed is not otherwise restricted:

a. BSMFF and MBSMF are authorized to operate at freight train speed. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

b. APLAA, ESBAT, AVBAT, AVLAY, FLOAT, LADAT, LASAA, LAAVT, LAEST, LAHOT and LAMFT are authorized to operate at freight train speed not to exceed 65 MPH. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

c. M.P. and ATSF Trains are authorized to operate at freight train speed not to exceed 60 MPH. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

d. LAHOY, BAESY, EUASY and LAESJ are authorized to operate at freight train speed not to exceed 55 MPH.

e. Light engine with operative dynamic brake is authorized to operate at passenger train speed.

Exception: Without dynamic brake in operation, must operate at freight train speed not to exceed 55 MPH.

f. Other freight trains may be authorized by train dispatcher to operate at freight train speed not to exceed 65 MPH. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

g. Trains not covered in items a, b, c, d, e or f may operate at freight train speed not to exceed 45 MPH, except as provided in A.B. Rule 65.

**MAXIMUM HORSEPOWER PER TON RATIOS**

BSMFF, MBSMF, APLAA, FLOAT, LAEST, LAMFT, LADAT	3.5
ESBAT, AVBAT	3.0
LAAVT, LAHOT, AVLAY, LASAA	2.5
All other Trains	2.0

(Refer to A. B. Rule 65)

**SPEED ON OTHER THAN MAIN TRACK:**

Remotely Controlled Turnouts and Sidings	25
Exception:	
Sanderson	20
All other tracks	10

**ADDITIONAL STATIONS**

Mile Post	Station	Station Number	Mile Post	Station	Station Number
816.7	Ysleta	60010	813.7	Buford	60015

**VALENTINE SUBDIVISION**

**SPECIAL INSTRUCTIONS**

**El Paso:** For movements within El Paso yard limits be governed by Special Instructions El Paso Terminal, Tucson Division.

**RULE P. Impaired Side Clearance:**

MP	Description	MP	Description
756.5	Bridge	618.8	Rock Cut
619.1	Rock Cut	515.9	Brackets on poles
		515.8	Brackets on poles

**RULE 10-J. Location of speed signs not located at distance prescribed:**

Speed Sign Location (MP)	Distance from Beginning of Restriction (Mile)
Eastward	
619.7	0.04 (ATSF only)

**RULE 82-A.** Trains of the M.P. Railroad originating at Tower 47 must obtain clearance and train orders at M.P. Yard Office, El Paso except when operator is not on duty they must obtain clearance and train orders, if any, from El Paso, (Cotton Ave.).

**RULE 83-A.** At the following stations only the trains indicated will register:

**El Paso (Cotton Ave.):** Trains originating or terminating.

Trains of the M.P. Railroad originating or terminating at Tower 47 will register at the M.P. Yard Office, El Paso.

**Valentine:** Trains originating or terminating.

**RULE 83-B.** At open train-order offices, trains may register by ticket as follows:

Trains originating or terminating at El Paso (Tower 196) will register by ticket.

**RULE 93. Location of Yard Limits:**

El Paso	820.0
---------	-------

**RULES D-97 and D-251.** Apply between Tower 47 and Belen.

**RULE 221. El Paso (Cotton Ave.):** Train-order office for trains originating only.

**Valentine:** No. 1 and No. 2 will not obtain clearance.

**RULE D-252.** Will not apply to trains entering D-97 territory at Alfalfa which have received clearance from El Paso (Cotton Ave.).

**RULE 306. Block signals with "P" plates:**

Eastward	Protection	Westward
P-7912	High water detector Bridges 790.60, 788.46 and 787.28	P-7865
P-7866	High water detector Bridge 786.36 (West Switch siding Iser)	P-A
P-A	(West Switch siding Iser) High water detector Bridge 784.05 (East Switch siding Iser)	P-A
P-A	(East Switch siding McNary) High water detector Bridge 767.55	P-7671
P-7672	High water detector Bridges 766.86 and 766.94	P-7635
P-7636	High water detector, Bridge 762.78 (West Switch siding, Finlay)	P-A
P-A	(East Switch siding, Finlay) High water detector Bridge 760.07	P-7579
P-7578	High water detector Bridge 756.60 (West Switch siding Small)	P-A
P-7320	High water detector Bridges 731.62 and 731.49	P-7293
P-7202	High water detector Bridges 719.70 and 718.73	P-7181
P-7180	High water detector Bridges 717.49, 716.45, 716.07 and 715.91 (West switch siding Hot Wells)	P-A
P-A	(West switch siding Hot Wells) High water detector Bridge 714.65 (East switch siding Hot Wells)	P-A
P-A	(East switch siding Hot Wells) High water detector Bridges 713.60 and 713.20	P-7115
P-7114	High water detector Bridges 709.10 and 710.77	P-7091
P-7092	High water detector Bridges 707.57 and 707.14	P-7067
P-7068	High water detector Bridges 706.27, 705.92 and 705.32 (West switch siding, Collado)	P-A

**VALENTINE SUBDIVISION**

Eastward	Protection	Westward
P-A	(West switch siding, Collado) High water detector Bridges 704.27 and 703.20 (East switch siding, Collado)	P-A
P-A	(East switch siding, Collado) High water detector Bridges 702.47, 702.11 and 700.87	P-7003
P-7002	High water detector Bridges 700.13, 699.31, 698.74, 698.24, 697.92 and 697.78	P-6975
P-6854	High water detector Bridges 684.54 and 683.78	P-6827
P-6546	High water detector Bridge 653.94 (West switch siding Ryan)	P-A
P-A	(West switch siding Ryan) High water detector Bridges 651.82 and 651.00 (East switch siding, Ryan)	P-A
P-A	(East switch siding, Ryan) High water detector Bridges 650.46 and 649.94	P-6485
P-A	(West switch siding, Aragon) High water detector Bridge 643.12 (East switch siding, Aragon)	P-A
P-A	(East switch siding, Aragon) High water detector Bridge 641.85	P-6401
P-6400	High water detector Bridge 637.02	P-6369
P-6370	High water detector Bridge 636.41	P-6343
P-6230	High water detector Bridge 622.51 (West switch siding, Paisano)	P-A
P-A	(West switch siding, Paisano) High water detector Bridge 620.32 siding Paisano (East switch siding, Paisano)	P-A
P-A	(West switch siding, Paisano) Bridge 620.32 (Santa Fe Jct.)	P-A
P-A	(East switch siding, Paisano) High water detector Bridges 618.08 and 617.30	P-6171
P-6130	High water detector Bridges 612.75 and 610.69 (West switch siding Alpine Junction)	P-A
P-A	(Absolute Signal MP 606.20) High water detector Bridge 605.35	P-6039
P-A	(East switch siding, Strobel) High water detector Bridge 597.80	P-5977
P-A	(East switch siding, Altuda) High water detector Bridges 590.61 and 588.80	P-5879
P-5880	High water detector Bridge 585.83 (West switch siding, Lenox)	P-A
P-A	(West switch siding, Marathon) High water detector Bridge 577.57 (East switch siding, Marathon)	P-A
P-A	(East switch siding, Warwick) High water detector Bridge 564.54	P-5641
P-A	(East switch siding, Haymond) High water detector Bridge 559.28	P-5579
P-5578	High water detector Bridge 556.61	P-5555
P-A	(East switch siding, Tesnus) High water detector Bridges 551.45, 550.94 and 550.52	P-5491
P-5492	High water detector Bridges 548.01 and 547.45 (West switch siding, Maxon)	P-A
P-A	(West switch siding, Maxon) High water detector Bridge 546.90 (West switch siding, Maxon)	P-A
P-5430	High water detector Bridge 542.67 (West switch siding, Rosenfeld)	P-A
P-A	(East switch siding, Rosenfeld) High water detector Bridge 536.80	P-5369
P-5368	High water detector Bridges 534.87 and 534.82 (West switch siding, Longfellow)	P-A
P-A	(West switch siding, Longfellow) High water detector Bridge 532.85 (East switch siding, Longfellow)	P-A
P-A	(East switch siding, Longfellow) High water detector Bridges 531.91 and 531.08	P-5301
P-5300	High water detector Bridge 528.60	P-5279
P-5278	High water detector Bridges 527.35 and 526.50 (West switch siding, Emerson)	P-A
P-A	(West switch siding, Emerson) High water detector Bridge 524.97 (East switch siding, Emerson)	P-A
P-5216	High water detector Bridge 520.95	P-5195
P-5196	High water detector Bridges 519.50 and 518.39 (West switch siding, Sanderson)	P-A

**RULE 538. Spring switches not equipped with facing point locks located as follows:**

Station	Location	Normal Position
*Sanderson	Switch connecting east end siding and No. 1 track	siding

\*Equipped with switch point indicator which may be trailed through when lined for either No. 1 track or siding.

**HOT BOX DETECTORS**

MP	Type	Directions	MP	Type	Directions
521.5	C	Both	688.2	C	Both
557.3	C	Both	721.5	C	Both
580.7	C	Both	765.5	C	Both
605.3	C	Both	788.8	C	Both
626.0	C	Both	811.5	C	Both
656.0	C	Both			

## VALENTINE SUBDIVISION

**RULE 760.** CTC in effect on main track and sidings between end of double track Belen and east switch Sanderson.

**Belen, MP 815.2.** Lower unit governs movement to Eastward main track and is equipped with a switch key actuator start box. Permission must be obtained from the train dispatcher before switch key is inserted in start box. Signal will not display desired indication until switch key is inserted in slot on signal mast and turned slowly one complete turn to right. In addition, before movement against current of traffic on Eastward main track is made, protection must be provided in accordance with provisions of either Rule D-160 or D-162.

**RULE 781. Sierra Blanca:** M.P. Trains originating at Toyah, enroute for movement over joint track at Sierra Blanca, must obtain S.P. clearance and train orders, if any, at M.P. train-order office Toyah. Clearance to bear the OK, time and initials of Chief Train Dispatcher.

Should absolute signal that governs eastward movements from main track or siding to the S.P. main track or the M.P. main track at Sierra Blanca be found displaying red aspect member of crew should contact train dispatcher. If authority is received from dispatcher, push-button located in boxes on signal house, one for S.P. and one for M.P. should be operated and signal should indicate proceed. If signal does not give desired indication, dispatcher should again be contacted for authority to proceed.

**Paisano and Alpine Junction:** Should the absolute signal that governs movement from ATSF to S.P. main track at Paisano or Alpine Junction be found displaying red aspect, member of crew should contact train dispatcher. If authority is received from dispatcher, push-button located in box on signal mast should be operated and signal should indicate proceed. If signal does not give desired indication, dispatcher should again be contacted for authority to proceed.

Second paragraph of Rule 781 will not apply to M.P. trains that have received clearance at Toyah or ATSF trains at Alpine Junction or Paisano.

**RULE 825. Instructions for applying hand brakes on each cut of cars:**

Sierra Blanca

All tracks —Not less than five brakes on east end.

Valentine —Not less than four brakes on west end.

Alpine Junction

Transfer Tracks —Not less than ten brakes on east end.

Sanderson —Not less than ten brakes on east end.

**RULE 827. Location of dragging and/or derailed equipment detectors:** MP 791.3, 788.8, 786.6, 765.2, 748.4, 734.5, 729.4, 723.2, 718.0, 711.5, 706.8, 700.2, 694.2, 688.2, 682.6, 676.4, 671.0, 665.0, 663.0, 657.0, 654.6, 648.5, 646.1, 640.1, 635.0, 627.9, 623.0, 617.0, 612.9, 606.2, 603.9, 597.7, 587.9, 580.9, 571.0, 564.2, 557.8, 555.6, 549.1, 543.2, 536.8, 530.0, 527.9, 521.5 and 519.5.

**RULE 872.** Does not apply at Valentine or Sanderson.

## DEL RIO SUBDIVISION

EAST-WARD	STATIONS				WEST-WARD	
FIRST CLASS					FIRST CLASS	
2 Psgr					1 Psgr	
Leave Mon Thur Sat	Mile Post			Station Number	Arrive Sun Tue Thur	
PM	506.9	9061	TO-R SANDERSON	BKPO	60336	AM
	500.1	8182	FEODORA	P	60343	s 9.40
	491.9	8356	MOFETA	P	60351	
	482.9	8747	DRYDEN	P	60358	
	476.9	8435	SHAW	P	60366	
	465.6	9345	MALVADO	P	60377	
	456.5	8275	PUMPVILLE	P	60387	
	442.7	9410	LANGTRY	P	60408	
	431.5	9027	SHUMLA	P	60416	
	423.3	8396	LULL	P	60423	
	413.4	10649	COMSTOCK	P	60433	
	404.6	8370	FEELY	P	60442	
	391.4	10345	AMISTAD	P	60450	
AM	378.5	9214	TO-R DEL RIO	BKYPQ	60467	s 7.00
s 1.59	370.1	8239	JOHNSTONE	P	60477	
	362.5	8457	AMANDA	P	60485	
	354.6	9212	PINTO	P	60493	
	341.7	8843	SPOFFORD	YP	61000	
	333.6	8365	ANACACHO	P	61108	
	324.7	8271	ODLAW	P	61120	
	315.1	8207	OBÍ	P	61132	
	301.1	8305	TO UVALDE	PQ	61140	
	289.6	8358	KNIPPA	P	61165	
	278.6	8428	SABINAL	P	61215	
	270.7	8341	SECO	P	61223	
	258.5	8810	HONDO	P	61247	
	248.3	8344	DUNLAY	P	61257	
	235.0	8288	LACOSTE	P	61272	
	224.5	8459	MACDONA	P	61280	
4.48	218.8		WITHERS	P	61290	4.00
5.01	212.7		TOWER 105	IP	62005	3.52
5.05	211.0		TO-R TOWER 112	KIPQ	62015	3.49
s 5.25	209.3		R SAN ANTONIO	BKPO	62200	3.45
AM	208.0		TOWER 121	KIPQ	62233	AM
	207.4		TO-R EAST YARD	BKIYPQ	62235	
Arrive Sun Tue Fri			(297.0)			Leave Sun Tue Thur
2						1

**DEL RIO SUBDIVISION**

**MAXIMUM AUTHORIZED SPEED FOR TRAINS**

BETWEEN	PSGR	FRT	PSGR	FRT
<b>SANDERSON and EAST YARD</b>	<b>70</b>	<b>70</b>		
<b>Exceptions:</b>	<b>PSGR</b>	<b>FRT</b>	<b>Exceptions:</b>	<b>PSGR FRT</b>
507.0 and 506.5	30	30	280.6 and 279.3	55 55
506.5 and 502.5	50	50	270.9 and 268.4	60 60
502.5 and 501.1	40	40	259.6 and 257.5	30 30
501.1 and 497.2	50	50	253.3 and 251.9	65 65
497.2 and 496.3	60	60	251.9 and 250.2	50 50
483.8 and 482.5	55	55	250.2 and 249.7	40 40
482.5 and 466.6	40	40	249.7 and 236.6	60 60
466.6 and 459.1	55	55	234.3ⓐ and 233.4ⓐ	40 40
459.1 and 458.2	50	50	224.0 and 218.8	50 50
458.2 and 457.8	40	40	<b>With current of Traffic</b>	
448.2 and 447.1	55	55	218.8 and 215.8	50 50
441.2 and 438.2	45	45	215.8 and 214.3	45 45
438.2 and 416.0	40	40	214.3 and 212.7	40 40
415.9 and 414.7	60	60	212.7 and 207.4	25 25
380.1 and 379.3	55	55	<b>Against current of traffic —</b>	
379.3 and 378.3	30	30	<b>Eastward</b>	
378.3 and 376.9	55	55	218.8 & 207.4 . Restricted Speed	
376.9 and 372.4	65	65	<b>Against current of traffic —</b>	
366.5 and 366.2	55	55	<b>Westward</b>	
357.6 and 356.4	55	55	207.4 & 207.9 . Restricted Speed	
356.4 and 349.0	60	50	207.9ⓑ and 208.1 Restricted	
349.0 and 342.7	70	60	speed not	
342.7 and 320.0	60	40	exceeding	
309.3 and 299.7	60	60	10 MPH	
285.6 and 280.6	65	65	208.1 & 218.8 . Restricted Speed	

**Rule 10-J.** ⓐ Speed may be increased as soon as lead locomotive has passed increase speed sign at these locations.  
 ⓑ Speed may be increased when lead locomotive has passed MP 207.9

"K" trains must not exceed 30 MPH between:

Uvalde MP 301.6 AND MP 300.2

The following establishes the maximum allowable speed for freight trains provided speed is not otherwise restricted:

a. BSMFF and MBSMF are authorized to operate at freight speed. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

b. APLAA, ESBAT, AVBAT, AVLAY, FLOAT, LADAT, LAAVT, LASAA, LAEST, LAHOT and LAMFT are authorized to operate at freight train speed not to exceed 65 MPH. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

c. BAESY, EUASY, LAESJ and LAHOY are authorized to operate at freight train speed not to exceed 55 MPH.

d. Light engine with operative dynamic brake is authorized to operate at passenger train speed.

Exception: Without dynamic brake in operation, must operate at freight train speed not to exceed 55 MPH.

e. Other freight trains may be authorized by train dispatcher to operate at freight train speed not to exceed 65 MPH. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

f. Trains not covered in items a, b, c, d or e may operate at freight train speed not to exceed 45 MPH, except as provided in A.B. Rule 65.

**MAXIMUM HORSEPOWER PER TON RATIOS**

BSMFF, MBSMF, APLAA, FLOAT, LAEST, LAMFT, LADAT	3.5
ESBAT, AVBAT	3.0
LAAVT, LAHOT, LASAA, AVLAY	2.5
All other trains	2.0

(Refer to A.B. Rule 65)

**DEL RIO SUBDIVISION**

EAST-WARD	STATIONS			WEST-WARD
FIRST CLASS				FIRST CLASS
21 Psgr				22 Psgr
Leave Mon Wed & Sat	Mile Post	Kerrville Branch	Station Number	Arrive Sun Tues & Fri
	259.1	CAMP STANLEY	Y 62138	
	253.9	BECKMANN	62127	
PM 9.15	238.6	KERR JCT.		AM 8.45
9.25	237.0	TO-R TOWER 112 KIPQ	62015	8.35
211.0	1.6			
9.40 PM	209.3	R SAN ANTONIO BKPO	62200	8.30 AM
	207.4	TO-R EAST YARD BKIYPQ	62235	
Arrive Mon Wed & Sat		(25.7)		Leave Sun Tues & Fri
<b>21</b>				<b>22</b>

**Eagle Pass Branch**

33.2	Yard Limits TO-R	EAGLE PASS	BPQ	61040
0.0	Yard Limits R	SPOFFORD	YP	61000
		(33.2)		

**MAXIMUM AUTHORIZED SPEED FOR TRAINS**

BETWEEN	KERRVILLE BRANCH	ALL TRAINS
CAMP STANLEY and TOWER 112		10

**EAGLE PASS BRANCH**

EAGLE PASS and SPOFFORD	40
-------------------------	----

Exceptions:	
32.5 and 27.0	20
0.3 and 00.0	10

**SPEED ON OTHER THAN MAIN TRACK:**

Remotely Controlled turnouts and sidings	25
Exception:	
Sanderson	20
Spofford	20
East Leg Wye Track Spofford	10
All other tracks	10

**ADDITIONAL STATIONS**

Mile Post	Station	Station Number	Mile Post	Station	Station Number
319.3	Del Rio Line		258.2	Kerrville Branch	
267.0	Cline	61126		Leon Springs	62135
	D'Hanis	61227			

**SPECIAL INSTRUCTIONS**

For movements within yard limits San Antonio, also see Special Instructions, San Antonio Yard Limits

**RULE P. Impaired Side Clearance:**

MP	Description	MP	Description
506.98-506.90	Brackets on poles	435.50	Rock cut
481.80	Rock cut	430.20	Rock cut
481.00	Rock cut	430.00	Rock cut
474.20	Rock cut	429.10	Rock cut
473.34	Bridge	426.20	Rock cut
466.80	Bridge	422.80	Rock cut
440.35	Rock cut	422.50	Rock cut

**DEL RIO SUBDIVISION**

421.80	Rock cut	291.44	Bridge
377.35	Bridge	290.98	Bridge
365.99	Bridge	285.00	Bridge
365.82	Bridge	280.58	Bridge
356.06	Bridge	267.84	Bridge
339.53	Bridge	253.29	Bridge
334.48	Bridge	255.47	Bridge
332.67	Bridge	<b>Eagle Pass Branch</b>	
330.31	Underpass	34.42	Bridge
307.79	Bridge	26.58	Bridge
300.14	Bridge		

**RULE 10-J. Location of speed signs not located at distance prescribed:**

Speed Sign Location (MP)	Distance from Beginning of Restriction (Mile)	Speed Sign Location (MP)	Distance from Beginning of Restriction (Mile)
506.5	0.1	379.4	0.1

**RULE 10-H. Exceptions.** On the Kerrville Branch when a yellow flag is required it will be displayed one-half mile from point of restriction.

**RULE 15. Exceptions.** On the Kerrville Branch the explosion of a torpedo requires movement at restricted speed for one mile from point where torpedo was exploded.

**RULE S-71, 97 AND 99.** Trains between Tower 112 and Camp Stanley (Kerrville Branch) and between MP 27 and Eagle Pass (Eagle Pass Branch) may operate without train-order or timetable authority and without superiority of trains. Between these points, trains may occupy main track without flag protection to the rear, and all trains must move at restricted speed, expecting to find main track occupied.

**Eastward extra trains must not pass Kerr Jct. without permission from operator Tower 112.**

**RULE 82-A.** Westward first-class trains originating San Antonio may assume schedule, as ordered, without clearance. No. 1 must obtain clearance at Tower 112. No. 22 must obtain M.P. clearance at Tower 112.

Eastward first-class trains originating Kerr Jct. may assume schedule without clearance.

Trains operating beyond yard limits MP 31.5 to MP 27 must obtain clearance at Eagle Pass.

**RULE 83-A.** At the following stations only trains indicated will register:

Spofford	Trains originating or terminating.
Tower 112	No. 1, No. 2, No. 21 and No. 22
San Antonio	Trains originating or terminating.

**RULE 83-B.** At open train-order offices trains may register by ticket, as follows:

Del Rio	No. 1 and No. 2
Tower 112	No. 1, No. 2, No. 21 and No. 22.

**RULE 93. Location of yard limits:**

218.8	San Antonio (Del Rio Subdivision)	
242.4	San Antonio (Kerrville Branch)	
1.6	Spofford (Eagle Pass Branch)	
	Eagle Pass	31.5

**RULE 99-C.** Will apply on the Eagle Pass Branch.

**RULE 103. Del Rio:** Sound detector mike located next to track on both sides Main Street. Trains stopped clear of Main Street on any track must sound engine whistle to lower or keep crossing gates down before entering crossing. Gates must be down before engine enters crossing.

Key control box is provided for manual operation of gates for other movements over crossing.

**Knippa:** A member of crew must take position at Highway 90 crossing to afford warning to traffic.

**DEL RIO SUBDIVISION**

**RULE 104-D.** Cars must not be dropped or kicked over FM 1604 while switching Beckmann team track Kerrville Branch.

**RULE 105. Eagle Pass:** Main track ends at east switch of Industry Track serving Molasses Company at MP 32.52.

**RULE 221.** Tower 112 is a train-order office for westward trains only.

Uvalde is a train-order office for eastward trains originating Spofford with crew assigned to local service between Spofford and East Yard.

**RULE D-252.** Will not apply to trains entering D-97 territory at Tower 112 from Beeville or Kerrville Branch, but Amtrak trains entering D-97 territory at Tower 112 from Kerrville Branch must ascertain from operator Tower 112 what instructions are in effect as to track conditions in the territory to be used.

**RULE 306. Block signals equipped with "P" plates:**

Eastward	Protection	Westward
P-A	(East Switch siding Dryden)	
	High water detector, Bridge 480.54	P-4801
P-A	(West Switch siding Malvado)	
	High water detector, Bridge 465.03	
	(East Switch siding, Malvado)	P-A
P-4594	High water detector, Bridge 457.56	
	(West switch siding, Pumpville)	P-A
P-4492	Falling rock detector, MP 447.3	P-4461
P-4460	High water detectors, MP 445.03 and MP 444.23	
	(West Switch siding, Langtry)	P-A
P-4392	High water detector, Bridge 438.20	P-4371
P-A#	(East switch siding Shumla)	
	Dragging equipment detector Pecos River Bridge	P-4279#
P-4172	High water detector, Bridge 415.66	
	(West Switch siding, Comstock)	P-A
P-4104	High water detector, Bridge 409.94	P-4079
P-A	(East switch siding Feely)	
	High water detector, Bridge 403.60	P-3987
P-3950#	Dragging and wide load detector Devil's River Bridge	
	(West Switch siding, Amistad)	P-A#
P-3882	High water detector, Bridge 385.03	P-3849
P-3666	High water detector, Bridge 365.99	
	(West switch siding, Amanda)	P-A
P-3086	High water detector, Bridge 307.79	P-3053

#Signals are equipped with unit for displaying flashing white light. When signals display stop indication without flashing white light, inspection must be made of entire train for derailed wheels, dragging equipment, shifted loads, or other unsafe conditions. After train inspection, operate key release on instrument house located below telephone. If signal does not display proceed indication, proceed in accordance with applicable rule.

**RULE 538. Spring switches not equipped with facing point locks located as follows:**

Location	Normal position
*Sanderson	Switch connecting East end siding and No. 1 track
	Siding

\*Equipped with switch point indicator. Refer to Rule 540. This spring switch may be trailed through when lined for either siding or No. 1 track.

**RULE 760.** CTC in effect on main track and sidings between west switch Sanderson and Withers.

**RULE 776. Sanderson:** Indicators located 1,000 feet west of absolute signals, east switch, Sanderson. Signal north of main track governs eastward trains on main track. Signal south of siding governs eastward trains out of yard, Sanderson.

When this indicator is displaying "flashing white" aspect, it indicates that absolute signal, east end, Sanderson, is displaying proceed indication for an eastward movement on the track that the signal governs.

Trains or engines desiring to move eastward from siding to main track must sound one long blast of engine whistle after engine occupies the circuit between whistle circuit sign and derail.

If derail fails to close and/or absolute signal fails to display desired indication, member of crew must contact train dispatcher. If authority is received from train dispatcher to pass absolute

## DEL RIO SUBDIVISION

signal, push button should be operated and if signal does not clear, member of crew must again contact train dispatcher to receive authority to manually operate derail and pass absolute signal. After movement over derail has been completed, member of crew must notify train dispatcher when selector lever has been returned to motor position.

Additional whistle circuit is located 500 feet west of white light which can be used by trains or engines desiring to move eastward from siding to main track sounding one long blast of engine whistle after engine occupies the circuit between whistle circuit sign and white light. If first whistle circuit is not used, whistle circuit at absolute signal must be used.

### RULE 825. Instructions for applying hand brakes:

- Sanderson —Not less than ten brakes on east end of cuts of cars.  
 Del Rio —Not less than four brakes on west end of cuts of cars west of highway overpass.  
 —Not less than four brakes on east end of cuts of cars east of highway overpass.  
 Eagle Pass —Not less than three brakes on west end of interchange tracks 111, 112, 113, 114 and 115.

**RULE 827. Location of Dragging and/or Derailed Equipment Detectors:** MP 503.7, 497.2, 494.8, 488.3, 479.9, 474.0, 471.4, 461.9, 459.4, 452.9, 446.1, 439.3, 434.4, 427.9, 426.2, 424.2, 420.0, 417.1, 410.4, 408.0, 398.7, 388.2, 381.5, 374.0, 366.6, 359.0, 351.1, 344.3, 337.0, 330.3, 321.8, 318.2, 308.5, 296.3, 284.5, 275.7, 273.6, 264.1, 255.7, 251.2, 245.3, 238.1, 231.9, 227.7 and 221.5.

**Location of High and/or Wide Load Detectors:** MP 388.2, 398.7, 471.6 and 462.7.

### HOT BOX DETECTORS

MP	Type	Directions	MP	Type	Directions
243.0	C	Both	386.0	C	Both
274.5	C	Both	419.7	C	Both
311.0	C	Both	448.4	C	Both
345.5	C	Both	471.9	C	Both
374.0	C	Both	497.8	C	Both

**RULE 830.** Cars may be left on main track between MP 27 and Eagle Pass (Eagle Pass Branch), and between MP 253.5 and Camp Stanley (Kerrville Branch) without authority or protection.

**RULE 872.** Does not apply at Sanderson, Del Rio or San Antonio.

## SAN ANTONIO YARD LIMITS

EAST-WARD	STATIONS		WEST-WARD
Mile Post	Rockport Line		Station Number
12.6	Yd. Limits	C. P. S.	YP 63017
5.6		BERGS	P 63011
211.0	ABS Yd. Limits	TOWER 112	KIPQ 62015
207.4		EAST YARD	BKIYPO 62235
		(16.2)	

### MAXIMUM AUTHORIZED SPEED FOR TRAINS

BETWEEN	C.P.S. and EAST YARD	ALL TRAINS
MP13 and MP 0.2		20
MP 0.2 and TOWER 112		10

The above Schedule page and Speed Table is for use of engines operating within the San Antonio-C.P.S. Yard Limits. For movements west of MP13 see Corpus Christi Subdivision Houston Division Timetable.

## SAN ANTONIO YARD LIMITS

### SPECIAL INSTRUCTIONS

#### RULE P. Impaired Side Clearance:

MP	Description	MP	Description
214.50	Overpass	209.35	Depot Umbrella Sheds
212.16	Underpass	208.10	Fence (westward track)
240.42	Underpass	206.24	MKT Underpass
238.34	Underpass		

#### RULE 10-J. Location of speed signs not located at distance prescribed:

Speed Sign Location (MP)	Distance from Beginning of Restriction (MILE)	Speed Sign Location (MP)	Distance from Beginning of Restriction (MILE)
EASTWARD		WESTWARD	
208.8	0.5	208.0	0.3

**RULE 82-A.** Engines operating East Yard to C.P.S. will obtain clearance OK'd by Chief Train Dispatcher, East Yard and Tower 112.

#### RULE 93. Location of yard limits:

218.8	San Antonio (Del Rio Subdivision)		
242.4	San Antonio (Kerrville Branch)		
5.4	San Antonio (Rockport Line)		
13.0	C.P.S. (Rockport Line)		5.4
	San Antonio (Flatonia Subdivision)		206.2

**RULES 93 and D-506.** San Antonio: Movements against the current of traffic between MP 206.3 and MP 207.8 will be governed by block signal indication.

**RULES D-97 and D-251.** Apply between Withers and East Yard.

#### RULE 98. Railroad Crossings at Grade Not Interlocked

**MP 238.6 (Kerrville Branch)—M.P. Crossing**

**MP 238.2 (Kerrville Branch)—MKT Crossing.** Equipped with gate, normal position for S.P. movement.

**RULE 104-F** will not apply between East Yard and Kirby.

**RULE 507.** When Signal 2140 (approaching Tower 105, on eastward track) displays stop indication, eastward trains or engines must communicate with operator Tower 112 before proceeding, to avoid blocking Zarzamora Street.

**RULE 530.** When making a trailing movement and switch points are not lined for such movement, all wheels of engine or leading car must clear switch points before reverse movement is commenced.

**RULE 538.** Spring switches not equipped with facing point locks located as follows:

Location	Normal Position
San Antonio	West end crossover from station tracks to westward track
San Antonio	Westward track Diesel shop track No. 8
	No. 7

**RULE 606. Tower 105 (M.P. Crossing):** Controlled by operator Tower 112.

**Tower 112 (MKT Crossing):** Signals governing movements against the current of traffic are equipped with switch key actuators, located on signal control cases near signal. Permission must be obtained from tower operator before switch key is inserted in slot in start box. Signal will not display desired indication until switch key is inserted in slot in switch key actuator box and turned slowly one complete turn clockwise. In addition, before movement against current of traffic is made, protection must be provided in accordance with provisions of either Rules, D-160 or D-162.



# SAN ANTONIO YARD LIMITS

## Tower 121 (Olive Street, San Antonio):

Interlocking signal located just east of Olive St. overpass, governing westward movement on the eastward main track, is equipped with switch key actuator, located on signal control case to right of tracks.

Permission must be obtained from tower operator before switch key is inserted in slot in start box. Signal will not display desired indication until switch key is inserted in slot in switch key actuator box and turned slowly one complete turn clockwise. In addition, before movement against current of traffic is made, protection must be provided in accordance with provisions of either Rule D-160 or D-162.

**East Yard:** Switches connecting east end of yard with main track and end of double track are dual control and switches and signals are controlled by operator in Tower 121.

**RULE 760.** CTC in effect on main track between MP 206.2, East Yard, and west switch siding, Kirby.

Signals controlled by operator, Tower 121, acting upon authority of train dispatcher.

**Withers:** When absolute signal that governs westward movement from the eastward main track to the main track at Withers displays red aspect, member of crew should contact train dispatcher. If authority is received from dispatcher, push-button located in box on signal mast should be operated and signal should clear. If signal does not clear, dispatcher should again be contacted for authority to proceed under the rules.

**RULE 824.** When necessary to make cut on unit coal trains in process of being unloaded at C.P.S. to set out bad order cars at dump pit, angle cock on detached portion of train should be closed before cut made as that portion of train secured by C.P.S. equipment.

## RULE 825. Instructions for applying hand brakes:

San Antonio (Passenger Station)—West end.

East Yard—Not less than three brakes on east end of cuts of cars west of walkway, and not less than ten brakes on east end of cuts of cars east of walkway.

## HOT BOX DETECTORS

### RULE 827.

MP	Type	Directions	MP	Type	Directions
203.4	D	Westward	*210.1	D	Eastward

\*Eastward trains receiving flashing white light indication at hot box detector, MP 210.1, east of Tower 112, must immediately reduce speed to not exceeding 15 MPH and proceed to East Yard, unless otherwise instructed by the foreman or the employee in charge of the hot box recorder at East Yard.

**RULE 837.** Crews handling cuts of cars on east end of East Yard will not release hand brakes or start eastward movement out of track until air brakes are cut in and charged, as shown below:

Number of Cars Handling	Minimum Number of cars charged with air on east end
10 to 20	5
21 to 40	10
Over 40	15

This does not apply when switching cuts on east end of old yard when engine movement does not go east of scale crossover.

**RULE 872.** Will not apply at San Antonio.

## SPEED ON OTHER THAN MAIN TRACK:

Tracks inside Diesel Facility	5
All other tracks San Antonio Yard Limits	10

# FLATONIA SUBDIVISION

EAST-WARD	STATIONS				WEST-WARD	
FIRST CLASS					FIRST CLASS	
2 Psgr					1 Psgr	
Leave Sun Tue Fri	Mile Post			Station Number	Arrive Sun Tue Thur	
AM 5.50	209.3	Yd. Lmts. { R 1.3 0.6 5.2 7.1 7.0 11.6 2.5 9.9 10.8 9.5 4.4 8.7 10.7 12.9 8.2 11.8 TO-R	SAN ANTONIO BKPQ		62200	AM 3.20
	208.0		TOWER 121 KIPQ		62233	
5.54	207.4		EAST YARD BKIYPQ		62235	2.45
	202.2		9653 KIRBY P		62243	2.40
	195.1		8453 RANDOLPH FIELD P		62252	
	188.1		9673 CIBOLO P		62257	
	176.5		8342 NOLTE P		62271	
	174.0		5435 SEQUIN P		62275	
	164.1		8442 KINGSBURY P		62284	
	153.3		10282 LULING P		62292	
	143.8	8685 HARWOOD P		62299		
	139.4	5268 SANDY FORK P		62410		
	130.7	8938 WAELDER P		62418		
7.32	120.0	9597 Yd Lmts TO FLATONIA KIPQ		70000	1.03	
7.46	107.1	Yrd Lmts TO SCHULENBURG P		75015	12.49	
7.55	98.9	10779 WEIMAR P		75025	12.40	
8.05 AM	87.1	Yrd Lmts TO-R GLIDDEN BKYPQ		75037	12.30 AM	
Arrive Sun Tue Fri		(122.2)				Leave Sun Tue Thur
2						1

## Gonzales Branch

	12.3	Yrd Lmts R	GONZALES BPQ	62325	
	0.0		HARWOOD P	62299	
			(12.3)		

## MAXIMUM AUTHORIZED SPEED FOR TRAINS

BETWEEN	PSGR	FRT
SAN ANTONIO and FLATONIA	70	70
FLATONIA and GLIDDEN	70	65

Exceptions:	PSGR	FRT	Exceptions:	PSGR	FRT
209.3 and 205.2	25	25	156.4 and 152.2	40	40
208.0 and 207.9 <sup>②</sup>	10	10	120.1 <sup>①</sup> and 118.9 <sup>①</sup>	45	45
(Westward Main Track, Against Current of Traffic)			107.8 <sup>①</sup> and 106.8 <sup>①</sup>	45	45
191.4 and 189.2	55	55	106.8 and 104.5	55	55
174.3 and 173.1	45	45	99.3 and 98.4	35	35
			90.0 and 87.1	70	55

**Rule 10-J.①** Speed may be increased as soon as lead locomotive has passed increase speed sign at these locations.

**②** Speed may be increased when Lead Locomotive has passed MP 207.9

BETWEEN	GONZALES BRANCH	ALL TRAINS
GONZALES and HARWOOD		10

## ADDITIONAL STATIONS

Mile Post	Station	Station Number	Mile Post	Station	Station Number
Flatonia Subdivision					
196.7	Converse	62248	179.3	Blumberg	62268
184.9	Marion	62262			

## FLATONIA SUBDIVISION

"K" trains must not exceed 30 MPH between Cibolo and East Yard MP 206.2 and MP 189.6.

The following establishes the maximum allowable speed for freight trains provided speed is not otherwise restricted:

a. BSMFF and MBSMF are authorized to operate at freight train speed. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

b. APLAA, AVBAT, AVLAY, FLOAT, LAAVT, LAEST, LAHOT, ESBAT, LADAT and LAMFT are authorized to operate at freight train speed not to exceed 65 MPH. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

c. LAHOY, BAESY, EUASY and LAESJ and regular assigned locals between East yard and Glidden are authorized to operate at freight train speed not to exceed 55 MPH.

d. BMDYL and BMGKL are authorized to operate at freight train speed not to exceed 40 MPH.

e. Light engine with operative dynamic brake is authorized to operate at passenger train speed.

Exception: Without dynamic brake in operation, must operate at freight train speed not to exceed 55 MPH.

f. Other freight trains may be authorized by train dispatcher to operate at freight train speed not to exceed 65 MPH. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

g. Trains not covered in items a, b, c, d, e or f may operate at freight train speed not to exceed 45 MPH, except as provided in A.B. Rule 65.

### MAXIMUM HORSEPOWER PER TON RATIOS

BSMFF, MBSMF, APLAA, FLOAT, LAEST, LAMFT, ESBAT, LADAT	3.0
LAAVT, LAHOT, AVBAT, AVLAY	2.0
All other trains except on branches	1.5
(Refer to A.B. Rule 65)	

### SPEED ON OTHER THAN MAIN TRACK:

Remotely Controlled turnouts and sidings	25
Crossover east switch siding Flatonia	10
Wye Track, Flatonia	5
Gonzales, St. Joseph Street	5
All other tracks	10

## SPECIAL INSTRUCTIONS

For movements within yard limits San Antonio, see Special Instructions, San Antonio Yard Limits.

### RULE P. Impaired Side Clearance:

MP	Description	MP	Description
193.1	Bridge	127.1	Bridge
178.4	Bridge	108.9	Bridge
172.3	Bridge	108.3	Bridge
156.5	Bridge	103.4	Bridge
150.3	Bridge	95.4	Underpass
140.0	Bridge		

**RULE 10-H. Exceptions.** On the Gonzales Branch when a yellow flag is required it will be displayed one-half mile from point of restriction.

**RULE S-71, 97 and 99.** Trains between Gonzales and Harwood may operate without train-order or timetable authority and without superiority of trains. Between these points, trains may occupy main track without flag protection to the rear, and all trains must move at restricted speed, expecting to find main track occupied.

**RULE 82-A.** Eastward first-class trains originating San Antonio may assume the schedule, as ordered, without a clearance, but must obtain clearance OK'd by Chief Train Dispatcher before leaving East Yard.

## FLATONIA SUBDIVISION

**RULE 83-B.** At open train-order offices trains may register by ticket as follows:

East Yard . . . No. 1 and No. 2

Glidden . . . All Trains with crews operating through.

### RULE 93. Location of yard limits:

San Antonio	206.2
122.0 . . . . Flatonia (San Antonio-Glidden)	118.0
27.8 . . . . Flatonia (Yoakum-Hearne)	30.5
108.4 . . . . Schulenburg	106.1
90.0 . . . . Glidden	78.2
Gonzales	10.5

**RULE 103.** At locations indicated below a member of crew must take position at crossing to afford warning to traffic:

Blumberg Spur, MP 179.3 — Highway 78.

Nolte Spur, MP 178.2 — Highway 78.

Seguin — Movements on industry tracks over Highway 90.

Gonzales — St. Joseph Street.

**RULE 105. Gonzales:** The main track ends at the wye switch.

**RULE 204.** Trains, with the same conductor and engineer operating through Flatonia, may be issued train orders on one subdivision which affect their movements on other, or both, subdivisions:

### RULE 221.

East Yard is a train-order office for eastward trains only.

### RULE 306. Block signals with "P" plates:

Eastward	Protection	Westward
P-970 . . . . Collision detector highway underpass	Bridge 95.36	P-933

**RULE 605 AND 761. Flatonia (Tower 3, SP Crossing):** Trains approaching Flatonia and finding governing block signal displaying an indication permitting train to proceed on main track are authorized to proceed on main track, ahead of or against all trains to the signal at the opposite end of the siding.

**RULE 760.** CTC in effect on main track and sidings (except Seguin and Sandy Fork) between west switch Kirby and west switch Flatonia.

### RULE 825. Instructions for applying hand brakes:

Glidden . . . . . Not less than five brakes on east end of each cut of cars.

**RULE 827. Location of Dragging and/or Derailed Equipment Detectors.** MP 199.2, 191.1, 185.0, 181.5, 170.3, 166.9, 159.8 150.9, 146.4, 136.0, 133.6, 127.2, 124.1 and 93.8.

### HOT BOX DETECTORS

MP	Type	Directions	MP	Type	Directions
93.9	C	Both	159.9	C	Both
126.0	C	Both	181.6	C	Both

**RULE 872.** Will not apply at San Antonio or Glidden.

**AUSTIN SUBDIVISION**

EAST-WARD	STATIONS		WEST-WARD
Mile Post	Dalsa Line		Station Number
29.2	9597 Yard Limits TO	FLATONIA	KIPQ 70000
38.7	9600	MULDOON	P 70010
53.1	8602	WINCHESTER	P 70025
67.2 59.0	8387 Yard Limits TO	GIDDINGS	KYPQ 70040
44.7	8569	DIME BOX	P 70615
32.0	10355 TO	CALDWELL	BKPQ 70630
24.9	8300	COOKS POINT	P 70645
18.2	8606	VARISCO	P 70652
7.5	8589	TATSIE	IP 70665
0.0	Yard Limits TO-R	HEARNE	BKIYPQ 71110
		(97.0)	

**Giddings Branch**

113.5	Yard Limits TO-R	AUSTIN	BKYPQ 70280
82.9	7162 Yard Limits	BUTLER	P 70230
55.7	Yard Limits TO	GIDDINGS	KPYQ 70040
		(57.8)	

**Cameron Branch**

	R	CALDWELL	BKPQ 70630
FOR MOVEMENTS ON ATSF RAILROAD BETWEEN CALDWELL AND CAMERON REFER TO SPECIAL INSTRUCTIONS, AUSTIN SUBDIVISION, RULE 812.			
117.8	R	30.2 CAMERON	71660
119.6		1.8 QUINIF	71650
		(32.0)	

**Shiner Branch**

0.0	Yard Limits TO-R	YOAKUM	BKP 74030
29.2	Yard Limits TO	FLATONIA	KIPQ 70000
		(29.2)	

**MAXIMUM AUTHORIZED SPEED FOR TRAINS**

BETWEEN	DALSA LINE	ALL TRAINS
FLATONIA and HEARNE		60
<b>Exceptions:</b>		
120.1 and 29.2 (Dalsa Connection Flatonia)	20	
29.3⓪ and 29.8⓪	45	
47.5 and 49.4	40	
58.9 and 66.1	40	
<b>Exceptions:</b>		
66.1⓪ and 58.6⓪ (Giddings)	25	
66.1 and 58.6	40	
3.8 and 2.4	50	
2.4 and 0.0	20	

**Rule 10-J.** ⓪ Speed may be increased as soon as lead locomotive has passed increase speed sign at these locations.

ⓑ When lead locomotive has passed MP 58.6 speed may be increased to 40 MPH. When rear of train has passed MP 58.6 speed may be increased to 60 MPH.

BETWEEN	Giddings Branch
AUSTIN and GIDDINGS	25
<b>Exceptions:</b>	
MP 108.4 and 105.7	10
MP 88.5 and 87.3	20
MP 57.8 and 55.7 (Austin Connection, Giddings)	10

**AUSTIN SUBDIVISION**

**ADDITIONAL STATIONS**

Mile Post	Station	Station Number	Mile Post	Station	Station Number
<b>Dalsa Line</b>			<b>Llano Branch</b>		
31.8	Richers		90.5	Stolz	70531
49.3	Tower 91 MKT		79.1	Kingsland	70518
	Crossing		71.9	Scobee	70510
	Shiner Branch		70.3	Snead Spur	70395
10.6	Shiner	74019	67.1	Sudduth	70385
21.1	Moulton	74008	64.4	Demarco	70381
	Giddings Branch		38.6	Liberty Hill	70356
109.1	Smoot	70272	31.5	Leander	70348
104.1	Decker	70266	27.1	Whitestone	70343
100.0	Menor	70283	10.7	Magnesium Spur	70317
87.8	Elgin	70240	9.8	Fromme	70315
85.1	Stacks	70233	7.3	Abercrombie	70311
62.8	Hills	70210	6.4	Butter Krust	70310

BETWEEN	Cameron Branch
CAMERON and QUINIF	10
BETWEEN	Shiner Branch
YOAKUM and FLATONIA	25

The following establishes the maximum allowable speed for freight trains provided speed is not otherwise restricted:

a. BSMFF, MBSMF, APLAA, LAEST, LADAT, ESBAT, and LAMFT are authorized to operate at maximum speed. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

b. BAESY and LAESJ are authorized to operate at maximum speed not to exceed 55 MPH.

c. Light engine with operative dynamic brake is authorized to operate at maximum speed.

Exception: Without dynamic brake in operation, must not exceed 55 MPH.

d. Other freight trains may be authorized by train dispatcher to operate at maximum speed. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

e. Trains not covered in items a, b, c or d may operate not to exceed 45 MPH, except as provided in A.B. Rule 65.

**MAXIMUM HORSEPOWER PER TON RATIOS**

BSMFF, MBSMF, APLAA, LAEST, LAMFT, ESBAT, LADAT	3.0
All other trains	1.5

(Refer to A.B. Rule 65)

**SPEED ON OTHER THAN MAIN TRACK:**

Remotely Controlled Turnouts and Sidings	25
Wye track Flatonia	5
All other tracks	10

**AUSTIN SUBDIVISION**

EAST-WARD Mile Post	STATIONS			WEST-WARD Station Number
	Llano Branch			
98.8	R	LLANO	YP	70540
69.7	Yard Limits R	29.1 FAIRLAND	YP	70390
62.6		7.8 GANDY	P	70378
60.0		1.9 BURNET	YPQ	70375
56.2		3.8 SUMMIT		70372
49.5	1415	6.7 BERTRAM	P	70366
16.5	3281	33.0 McNEIL	IP	70320
1.4	Yard Limits R TO-R	15.1 AUSTIN	BKYPQ	70280
		(97.4)		

**Marble Falls Branch**

6.2		2.2 MARBLE FALLS	YP	70410
4.0		4.0 GRANITE MOUNTAIN		70405
0.0	Yard Limits	6.2 FAIRLAND	YP	70390
		( 6.2)		

BETWEEN FAIRLAND AND MARBLE FALLS THERE IS NO MAIN TRACK AND OPERATIONS OF ENGINES WILL BE IN ACCORDANCE WITH RULES AND REGULATIONS AND SPECIAL INSTRUCTIONS GOVERNING MOVEMENTS ON OTHER THAN MAIN TRACKS, EXCEPT MOVEMENTS MUST BE MADE AT RESTRICTED SPEED.

**MAXIMUM AUTHORIZED SPEED FOR TRAINS**

BETWEEN	LLANO BRANCH	ALL TRAINS
LLANO and AUSTIN		35

Exceptions:	Exceptions:
98.8 and 92.4 ..... 10	37.1 and 35.9 ..... 10
92.4 and 85.0 ..... 20	35.9 and 33.3 ..... 25
85.0 and 74.0 ..... 25	24.5 and 23.6 ..... 25
74.0 and 55.0 ..... 20	17.6 and 15.1 ..... 20
55.0 and 54.0 ..... 25	15.1 and 1.9 ..... 25
	1.9 and 1.5 ..... 10

The following class engines must not be operated between Austin Junction, MP 1.5 and Stoltz, MP 90.5

- All six-axle units except EF 618.
- All six-axle slug units.

All locomotives are restricted from operating between Llano and Stoltz, MP 90.5 except EF 418, EF 618, ES 410 and ES 412.

**SPECIAL INSTRUCTIONS**

**RULE P. Impaired Side Clearance:**

MP	DESCRIPTION	MP	DESCRIPTION
<b>DALSA LINE</b>			
51.1	Bridge	94.9	Rock Cut
52.5	Bridge	94.2	Bridge
66.8	Bridge	93.9	Rock Cut
54.9	Bridge	92.7	Bridge
48.1	Bridge	91.4	Bridge
41.8	Bridge	89.3	Bridge
38.4	Bridge	85.7	Bridge
31.9	Bridge	83.9	Bridge
30.2	Bridge	67.7	Rock Cut
19.5	Bridge	64.5	Rock Cut
17.9	Bridge	57.9	Rock Cut
	(Main & Siding)	34.1	Rock Cut
<b>SHINER BRANCH</b>			
21.19	Bridge	<b>MARBLE FALLS BRANCH</b>	
<b>LLANO BRANCH</b>			
98.60	Bridge	5.6	Bridge
97.65	Rock Cut	<b>GIDDINGS BRANCH</b>	
		109.4	Bridge
		67.9	Bridge

**AUSTIN SUBDIVISION**

**RULE 10-H. Exceptions.** On the Cameron, Shiner and Marble Falls Branches when a yellow flag is required it will be displayed one-half mile from point of restriction.

**RULE 10-J. Location of speed signs not located at distance prescribed:**

Giddings Branch	
Speed Sign Location (MP)	Distance from Beginning of Restriction (Mile)
<b>Westward</b>	
56.6	1.4

**RULE 15. Exceptions.** On the Cameron Branch between Cameron and Quinif, Shiner and Marble Falls Branches the explosion of a torpedo requires movement at restricted speed for one mile from point where torpedo was exploded.

**RULE S-71. There is no superiority of trains on main track between following points:**

Giddings East leg of wye and west switch to siding Hearne Signal 1186 (Hearne-Englewood Line) east end yard, westward absolute signals west end new track and interlocking signal governing westward movements, west end yard Austin MP 113.1 and MP 115.1

**RULE 83.** Westward trains may identify trains in either direction at Giddings to be applied when passing from CTC limits to other track.

**RULE 83-A.**

At the following stations only the trains indicated will register:

Fairland ..... Trains directed by train order.  
Gandy ..... All trains.  
McNeil ..... Trains directed by train order.

**RULE 83-B.**

Trains originating or terminating at Hearne will register by ticket.

**RULE 93. Location of yard limits:**

74.0	Burnet	55.0
18.0	McNeil	15.0
4.0	Austin (Llano Branch)	
	Austin (Giddings Branch)	109.5
86.5	Butler	80.5
120.0	Yoakum (Victoria Subdivision-Shiner Branch)	3.0
66.2	Giddings	58.6
57.8	Giddings (Giddings Branch)	
2.4	Hearne	

**RULE 98. Hearne:** Stop must be made clear of Mumford Highway MP 2.4 entering Hearne yard unless route is designated and known to be clear and yardmaster has been contacted.

**RULE 99. Exception:** On the Shiner Branch when protection by flagman is required by this rule, distances specified for placement of torpedoes and flag protection will be one-half and one mile from train being protected.

**RULE 99-C.** Will apply on the Giddings, Shiner and Llano Branches.

**RULE 103.** At locations indicated below a member of crew must take position at crossing to afford warning to traffic:

Stoltz, MP 90.5 — Highway 29.  
Austin — Waller Street.

Giddings — During switching movements over Highway 290 member of crew must be at crossing to afford warning to traffic while movement is being made.

Look out for trucks and roadway machines crossing track at MP 62.75, Gandy and MP 14.80, Llano Branch.

**RULE 105. Llano:** Main track ends at MP 97.5.

**RULE 204.** Trains, with the same conductor and engineer operating through Flatonia, may be issued train orders on one



**AUSTIN SUBDIVISION**

**AUSTIN SUBDIVISION**

subdivision which affect their movements on other, or both, subdivisions.

Trains operating through station indicated may be issued train orders on one division which affect their movement on both divisions:

Yoakum Trains operating on the Houston Division, Port Lavaca line of the Victoria Subdivision, en route the San Antonio Division, Shiner Branch of the Austin Subdivision. Trains operating on the San Antonio Division, Shiner Branch of the Austin Subdivision, en route the Houston Division, Port Lavaca line of the Victoria Subdivision.

**RULE 221. Unit for display of flashing white light installed at following location:**

Station	Location	Direction
Giddings . . .	On Mast, northside track just west of west switch . . . . .	Westward

Caldwell is train-order office only for trains originating.

**RULE S-240. Staff System:**

Territory	Register Location
Cameron Branch Cameron - Quinif	Cameron

**RULE 306. Block signals with "P" plates.**

Eastward	Protection	Westward
P-398	Collision detector Bridge 38.4 between Caldwell and Dime Box . . . . .	P-377

**RULE 516. Overlap Posts:**

Winchester . . . . .	Westward trains
----------------------	-----------------

**RULE 538. Spring switches not equipped with facing point locks located as follows:**

Austin,* Llano Giddings Branch Connection . . . . .	Llano Branch
---	--------------

\*Equipped with switch point indicators.

Facing point movement must not exceed 35 MPH over these switches.

**RULE 606. Flatonia (Tower 3, SP Crossing):**

Trains approaching Flatonia and finding governing block signal displaying an indication permitting train to proceed on main track are authorized to proceed on main track, ahead of or against all trains to the signals at the opposite end of the siding.

**McNeil, MP 16.5 Llano Branch, M.P. Crossing.**

Normally lined for M.P. No operator on duty. Signals must be restored to normal position after use.

**RULE 680. Elgin, MP 87.7 Giddings Branch, MKT Crossing.**

**Tower 91, MP 49.3 (between Winchester and Muldoon) MKT Crossing.**

**Tatsie, MP 6.8, M.P. Crossing.**

Interlocking signals at east end Tatsie governing both eastward and westward trains serve as both interlocking and absolute signals. Trains stopped by these signals must observe both interlocking and CTC rules.

**RULE 760. CTC in effect on main track and sidings between west switch Giddings and west switch of new track, Hearne.**

**RULE 812. Cameron-Caldwell:** Trains operating on ATSF tracks between Cameron and Caldwell will be governed by current ATSF Southern Division Timetable, San Antonio Division Timetable and Southern Pacific Transportation Company Rules and Regulations of the Transportation Dept. with the following additions & modifications:

- Controlled Signal.** — A fixed signal, the indication of which is controlled from a control station.

- Control Station.** — The place where the control machine of a traffic control system or an interlocking is located.
- Rules 10-G, 10-H and 10-I will not apply. The following will govern:**

Temporary slow signals (yellow flag, disc or light) will be displayed not less than two miles, when practicable, in advance of locations where a reduction in speed is required, or where Form U train orders require trains to stop. Temporary resume speed signals (green disc) will be displayed to indicate the end of such areas.

When temporary slow signals are displayed, trains must not exceed speed specified by train order or special instructions until rear of train has passed temporary resume speed signal or train has cleared the restricted limits.

When temporary slow signals are displayed and train has not been restricted by train order or special instructions, two miles beyond the temporary slow signal, train will proceed prepared to stop short of a flagman, obstruction, temporary stop signals or men and machines fouling track, not exceeding 10 miles per hour, for a distance of two miles or until rear of train has passed a temporary resume speed signal.

Temporary stop signals (red flag, disc or light) will be displayed at locations where trains must stop as required by Form U, Example (1), train order. Trains must not pass temporary stop signals until notified by foreman or supervisor in charge. When so notified, trains must not exceed the speed specified by such foreman or supervisor through the restricted area.

When temporary stop signals are displayed, and train does not have a Form U, Example (1), train order, train must stop and not proceed until authorized by proper authority.

When temporary slow, stop or resume speed signals are displayed, and train has no train order or special instructions concerning reason for their display, the conductor will notify the train dispatcher as promptly as possible and make a wire report to the trainmaster.

When a series of locations requiring reduced speeds are so closely spaced that the resume speed signal will overlap a temporary slow signal, a temporary slow signal will be placed in advance of each location. Only one resume speed signal will be placed at the leaving end of the last location.

**Train Order Form U.**

**Stop and Speed Limit Orders.**

- Eight naught one 8 01 AM until five naught one 5 01 PM between 15 poles west of MP 10 and MP 11 between D and E track is impassable stop and do not enter these limits until notified that track is passable.

Trains and engines must stop, and not pass, temporary stop signal until notified by foreman or supervisor in charge that track is passable. The foreman or supervisor in charge must specify the speed permitted through the limits specified.

- Eight naught one 8 01 AM until five naught one 5 01 PM approach (gang No. . . . .) between 15 poles west of MP 10 and MP 11 between D and E prepared to stop short of men and machines fouling track until proper proceed signal received or notified verbally by (title and name of employe in charge and gang number) that track is clear of men and machines.

Trains and engines, within the limits of this order, must approach gangs prepared to stop, and stop short of men and machines occupying or fouling track. If proper proceed signal, given with yellow flag or yellow light, is received; or, if notified verbally by employe named in the order that track is clear of men and machines, train or engine is

**AUSTIN SUBDIVISION**

released from requirement of moving prepared to stop short of men and machines.

4. **Rule 10-J will not apply. The following will govern:**  
 Permanent slow signs, yellow with numerals, will be located not less than 2,500 feet (when predicable) in advance of locations where speed of trains must be reduced. The numerals thereon nearest the track, or those at the top of the sign, indicate the maximum speed for passenger trains, and the other numerals the maximum speed for freight trains. Where only one numeral is shown it shall govern the speed of both passenger and freight trains. Indicated speeds must not be exceeded until rear of train has passed a permanent resume speed sign.

There may be more than one permanent slow sign in advance of a permanent resume speed sign, in which case the reduced speed shown on each permanent slow sign must be observed in succession until rear of train has passed the permanent resume speed sign.

5. **Rule 11 will not apply. The following will govern:**  
 A train finding a fusee burning on or near its track must stop and extinguish it or wait until it has burned out. The train must then proceed at restricted speed for one mile.
6. **Rules 285-A and 288 will not apply. The following block signal names, aspects and indications will govern:**

Name	Aspect	Indication
Approach-Medium	Flashing yellow or double yellow	Proceed; approach next signal not exceeding 40 mph, and be prepared to enter diverging route at prescribed speed.
Diverging-Approach	Red over flashing yellow	Proceed through diverging route: Prescribed speed through turnout; approach next signal preparing to stop, if exceeding 40 mph, immediately reduce to 40 mph.
Restricting	Red over yellow	Proceed at RESTRICTED SPEED

7. **Traffic Control System (TCS)** — A block system under which movements are authorized by block signals whose indications supersede the superiority of trains for both opposing and following movements on the same track.

Within TCS Limits Absolute Signals will not bear number plates. SPT Co. Rules applicable to CTC will apply except:

- (a) After passing an Absolute Signal displaying a stop indication upon authority of Train Dispatcher train must stop for each Automatic Block Signal displaying a Red Aspect.
- (b) The term Track Time and Limits will be used instead of Work Limits and Clock Time Limit. Granting of such authority must be in the following form:

(Train or Engine) may use (track or tracks) between ..... and ..... M until ..... M.

Trains granted Track Time and Limits must stop for any Automatic Block Signal displaying Red Aspect.

**AUSTIN SUBDIVISION**

**RULE 827. Location of Dragging and/or Derailed Equipment Detectors:** MP 47.74 (indicators also at MP 49.8 & 49.0), 56.6, 45.8, 49.6, and 21.5.

**Location of High and/or Wide Load Detectors:** MP 46.3 and 55.7.

**HOT BOX DETECTORS**

MP	Type	Directions	MP	Type	Directions
45.8	C	Both	28.0	C	Both
49.6	C	Both	5.2	C	Both

**RULE 872.** Will not apply at Hearne, Yoakum and Austin.

**AIR BRAKE RULES**

**RULE 33. Restrictive Grades.**

**LLANO BRANCH**

Eastward Llano to Austin			Westward Austin to Llano		
MP	MP	MPH	MP	MP	MPH
40.0	35.3	25	50.0	70.0	25
70.0	50.0	25			

**ENNIS SUBDIVISION**

EASTWARD			STATIONS	WESTWARD
FIRST CLASS				
46 Freight	42 Freight	Mile Post		
Leave Daily	Leave Daily			
			Station Number	
		337.9	Yd Lmts DENISON BKIP R 7.6	73730
		330.3		
		328.8	Yd Lmts NORTH SHERMAN JCT BKP TO-R 1.5	73710
		326.7		
		326.7	SHERMAN BKIPQ	73540
		324.6		
		324.6	FRISCO JCT P	73531
		296.5		
		296.5	SOUTH SHERMAN JCT P	73528
		288.2		
		288.2	1559 Yd Lmts MCKINNEY P	73511
		282.1		
		282.1	7870 ALLEN	73505
		273.0		
		273.0	Yd Lmts PLANO KIPQ	73400
		13.8		
		4.8	GIFFORD	72683
		4.1		
		2.7	TO M.P. JCT IPQ 0.7	72680
		2.0		
		261.2	BRIGGS P	72675
			5159 FOX	72530
			BELT JCT KYPQ	72702
			DALLAS UNION STA. IP	72705
		0.0	Yard Lmts TOWER 19 IP	72703
		2.0		
		261.2	FOREST AVE P	72530
			BELT JCT KYPQ	72700
		258.0	10195 Yd Lmts MILLER BKIPQ	72512
		246.5		
		233.6	5503 FERRIS	72030
		231.7		
		220.8	GARRETT P	72024
		209.7		
		209.7	Yd Lmts ENNIS BKYPQ TO-R 10.9	72015
		10.37		
		10.37	7551 Yd Lmts CORSIANA BKIPQ TO-R 6.1	71322
		10.55		
		10.55	8412 ANGUS P	71240
		11.01		
		11.01	8293 GUDE P	71230
		11.12		
		11.12	8600 GROESBECK KPQ	71215
		11.29		
		11.29	12832 Yd Lmts KOSSE P	71143
		11.42		
		11.42	9791 BREMOND KPQ TO 13.2	71122
		12.01		
		12.01	8545 SEGER	71110
		12.07		
		12.07	Yd Lmts HEARNE BKYIPQ TO-R 2.8	(217.2)
46	42			

**RULE 5. Plano:** Time applies at SP Switch to SSW connecting track.

**Ennis:** Time applies at clearance point east switch long track MP 230.94 for eastward trains.

**Gifford:** Time applies at Old Dallas Main Track Switch.

**Gifford:** Old Dallas Main Track is Spur 3000 feet in length to first street crossing opening west.

**ENNIS SUBDIVISION**

**MAXIMUM AUTHORIZED SPEED FOR TRAINS**

BETWEEN	PSGR	FRT	PSGR	FRT
DENISON and HEARNE	70	70		
<b>Restrictions:</b>	<b>PSGR</b>	<b>FRT</b>	<b>Restrictions:</b>	<b>PSGR</b>
338.0 and 337.4	10	10	260.7 and 260.1	10
337.4 and 335.1	20	20	260.1 and 256.1	20
335.1 and 330.2	25	25	256.1 and 232.8	25
330.2* and 327.3*	20	20	232.8 and 230.7	20
329.3 and 326.9	10	10	230.7* and 228.6*	30
326.9 and 324.7	35	35	228.6 and 213.0	40
324.7 and 280.9	25	25	213.0 and 208.5	30
280.9 and 273.0	20	20	183.2* and 179.6*	40
Belt Line	13.7 and 2.1	20	170.4* and 168.9*	45
	2.1 and 1.8	10	163.3 and 163.0	55
	1.8 and 0.0	20	129.8* and 121.0	50
261.4 and 260.7	10	10	121.0 and 117.9	20

\* Rule 10-J. Speed may be increased as soon as lead locomotive has passed increase speed sign at these locations.

"K" trains must not exceed 30 MPH between:

Bremond	MP 143.3 and MP 141.6
Mansfield	MP 34.4 and MP 32.6

- 25 MPH through BN turnout connection Frisco Jct.
- 25 MPH through BN turnout connection So. Sherman Jct.
- 10 MPH through BN turnout connection Sherman.
- 20 MPH Westward trains approaching interlocking signal, Sherman.
- 20 MPH Eastward trains approaching absolute signal, beginning CTC, Frisco Jct.
- 10 MPH through SSW connection and Jct Switch, Plano.
- 20 MPH Westward trains approaching absolute signal west end of yard, Ennis.
- 20 MPH Westward trains approaching interlocking signal west end of yard, Hearne.

The following establishes the maximum allowable speed for freight trains provided speed is not otherwise restricted:

a. BSMFF and MBSMF are authorized to operate at freight train speed. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

b. APLAA, LAMFT, LADAT, ESBAT and LAEST are authorized to operate at freight train speed not to exceed 65 MPH. If train exceeds 120 cars maximum speed is reduced to 55 MPH.

c. LAESJ, BAESY, DAHOT, HODAT and EUASY are authorized to operate at freight train speed not to exceed 55 MPH.

d. Light engine with operative dynamic brake is authorized to operate at passenger train speed.

Exception: Without dynamic brake in operation, must operate at freight train speed not to exceed 55 MPH.

e. Other freight trains may be authorized by train dispatcher to operate at freight train speed not to exceed 65 MPH. If train exceeds 120 cars, maximum speed is reduced to 55 MPH.

f. Trains not covered in items a, b, c, d or e may operate at freight train speed not to exceed 45 MPH, except as provided in A.B. Rule 65.

**MAXIMUM HORSEPOWER PER TON RATIOS**

BSMFF, MBSMF, APLAA, LAEST, LAMFT, ESBAT, LADAT	3.0
All other trains	1.5

(Refer to A.B. Rule 65)

**ENNIS SUBDIVISION**

EAST-WARD	STATIONS		WEST-WARD
Mile Post	Fort Worth Branch		Station Number
52.4	ABS Yd Lmts TO-R	FORT WORTH 12.4 BKIPQ	72400
41.0	8420	BISBEE 5.9	72339
34.1	R	MANSFIELD 22.4	72333
11.7	R	WAXAHACHIE 11.7	72120
0.0		GARRETT 1.9	72030
231.7	Yd Lmts TO-R	ENNIS BKYPQ	72024
		(54.2)	

Athens Branch			
259.0	ABS Yd. Limits	R MILLER 2.2	BKIPQ 72700
261.2		BELT JCT 0.7	YPO 72530
2.7		5159 FOX 1.4	P 72635
315.0		BRIGGS 16.4	72680
298.6		SEAGOVILLE (20.7)	72653

Paris Branch			
328.8	R	SHERMAN BKIPQ	73540
SEE M.P. R.R. CO. TIMETABLE SPECIAL INSTRUCTIONS AND RULES FOR MOVEMENT BETWEEN SHERMAN AND PARIS.			
124.3		PARIS	73880

**MAXIMUM AUTHORIZED SPEED FOR TRAINS**

BETWEEN	FORT WORTH BRANCH	LOADED COAL TRAINS	OTHER TRAINS
FORT WORTH and GARRETT		25	35
<b>Exceptions:</b>			
MP 51.3 and 49.0		20	20
MP 49.0 and 44.5		25	25
MP 23.7* and 22.4		25	30
MP 13.9* and 10.5*		20	20
MP 13.9 and 0.0		25	25
Junction Switch Garrett		20	20

ATHENS BRANCH		ALL TRAINS
BRIGGS and SEAGOVILLE		10

\* **RULE 10-J.** Speed may be increased as soon as lead locomotive has passed these locations.

SPEED ON OTHER THAN MAIN TRACKS:	
Sidings between Hearne and Corsicana	25
Siding Rice	20
All Tracks Sherman, Fort Worth and McKinney	5
Compress Track Waxahachie	5
Paragon Spur, (MP 32.8, Fort Worth Branch)	5
All other tracks, Ennis subdivision	10

**ADDITIONAL STATIONS**

Mile Post	Station	Station Number	Mile Post	Station	Station Number
<b>Athens Branch</b>					
309.2	Elam	72664	319.0	Howe	73525
302.2	Bobwyn	72657	313.0	Van Alstyne	73521
300.7	Simonds	72655	307.5	Anna	73518
<b>Fort Worth Branch</b>					
48.7	Brandt	72360	303.0	Melissa	73516
46.8	Forest Hill	72345	277.3	Richardson	72920
25.6	Gitco	72325	275.4	Curtis	72915
23.1	Midlothian	72310	254.2	Hutchins	72521
<b>Ennis Line</b>					
336.3	Jaques Spur	73719	251.3	Wilmer	72515
			188.4	Wortham	71311
			128.7	Calvert	71128

**ENNIS SUBDIVISION**

**SPECIAL INSTRUCTIONS**

For movement within yard limits Miller, also see Special Instructions, Miller Yard Limits

**RULE P. Impaired Side Clearance:**

MP	Description	MP	Description
337.0	Bridge	199.8	Bridge
326.3	Bridge	185.6	Bridge
299.0	Bridge	182.9	Bridge
297.1	Bridge	172.3	Bridge
294.2	Bridge	<b>FORT WORTH BRANCH</b>	
292.3	Bridge	49.5	Bridge
289.6	Bridge	48.5	Bridge
286.3	Bridge	43.4	Bridge
273.8	Bridge	34.4	Bridge
240.6	Bridge	34.3	Bridge
216.5	Bridge	28.9	Bridge
215.4	Bridge	22.9	Eaves on Tower 94
213.9	Bridge	13.3	Bridge
212.3	Overpass	12.9	Bridge
211.1	Bridge	12.1	Bridge
210.8	Bridge	11.9	Bridge
210.2	Train Shed	9.5	Bridge
209.7	Bridge	7.7	Bridge
208.9	Bridge		

**RULE 10-H. Exceptions.** On the Athens Branch when a yellow flag is required it will be displayed one-half mile from point of restriction.

**RULE 10-J. Location of speed signs not located at distance prescribed:**

Speed Sign Location (MP)	Distance from Beginning of Restriction (Mile)	Speed Sign Location (MP)	Distance from Beginning of Restriction (Mile)
<b>EASTWARD</b>		<b>WESTWARD</b>	
335.2	0.0	330.3	0.0

**RULE 10-J. Exception:** Athens Branch speed signs that prescribe reduction in speed will be located one-half mile from initial point of restriction.

**RULE 15. Exceptions.** On the Athens Branch the explosion of a torpedo requires movement at restricted speed for one mile from point where torpedo was exploded.

**RULE S-71. There is no superiority of trains on main track between following points:**

- Denison . . . . Denison and beginning of interlocking.
- Miller . . . . East end of CTC and fouling point east end of siding.
- Ennis . . . . Fouling point west end No. 1 track and beginning of CTC.
- Sherman . . . Train-Order Signal and Frisco Jct.
- Corsicana . . East switch to siding and interlocking signal governing westward movements.
- Hearne . . . Signal 1186 (Hearne-Englewood Line) east end yard, westward absolute signals west end new track and interlocking signal governing westward movements, west end yard.

**RULE S-71, 97 and 99.** Trains between Seagoville and Briggs may operate without train order or timetable authority and without superiority of trains. Between these points, trains may occupy main track without flag protection to the rear, and all trains must move at restricted speed, expecting to find main track occupied.

**RULE 82-A.** Eastward trains departing Fort Worth F.W.D. North Yard will receive clearance and train orders at Fort Worth, Broadway Yard, but will not depart Fort Worth F.W.D. North Yard until SP operator has been notified that train is ready to depart.



**ENNIS SUBDIVISION**

Commerce . . . trains originating enroute to the SP at Plano must obtain SP Clearance bearing OK, time and initials of Chief Train Dispatcher for movement between Plano and Miller.

**RULE 83.** An inferior train identifying a superior train in either direction within CTC limits between M.P. Jct and Miller, and at Bremond or Seger will not be required to check against the same train before leaving CTC limits.

**RULE 83-A.** At the following stations only the trains indicated will register:

Denison . . . . .	Trains originating or terminating except B.N. trains.
Sherman . . . . .	Trains originating or terminating except B.N. trains.
McKinney . . . . .	Trains directed by train order.
Plano . . . . .	Trains directed by train order.
Waxahachie (MKT interchange) MP 12.6	Trains directed by train order.
Forest Hill, MP 46.8 . . .	Trains directed by train order.
Miller . . . . .	Trains to or from Athens Branch and SSW trains originating or terminating and trains directed by train order.
Corsicana . . . . .	All trains.
Mansfield . . . . .	Trains originating, terminating or directed by train order.

**RULE 83-B.** At open train-order offices trains may register by ticket as follows:

Sherman . . . . .	Trains originating or terminating.
Corsicana . . . . .	All trains.
Fort Worth . . . . .	Trains originating or terminating FWD, North Yard.

Trains originating or terminating at Hearne will register by ticket.

Eastward trains originating M.P. Jct may leave without clearance if train-order signal is displaying proceed indication.

**RULE 93. Location of yard limits:**

Denison . . . . .	337.4
330.7 . . . . . Sherman . . . . .	326.9
297.0 . . . . . McKinney . . . . .	294.5
283.0 . . . . . Plano . . . . .	281.0
278.2 . . . . . Richardson . . . . .	276.5
260.2 . . . . . Miller (Ennis Line) . . . . .	257.1
Belt Jct. . . . .	1.8
273.6 . . . . . M.P. Jct . . . . .	4.8
Miller (Athens Branch) . . . . .	313.9
232.7 . . . . . Ennis . . . . .	228.0
213.0 . . . . . Corsicana . . . . .	208.4
156.0 . . . . . Kosse . . . . .	151.5
120.8 . . . . . Hearne . . . . .	115.8
2.4 . . . . . Hearne (Austin Subdivision)	
Fort Worth . . . . .	48.3

**RULE 105. Fort Worth:** Main track ends at MP 51.3.

Following will govern movements on NRTC main tracks between 17th Street and North Fort Worth Interlocking Tower, Fort Worth Yard:

- (a) Between 17th Street and Trinity River, Fort Worth yard limits, two main tracks are in service signalled for movements only with current of traffic.
- (b) At 6th Street Jct and Purina Jct there are Interlockings; signals and remote controlled switches handled by NRTC train dispatcher.
- (c) All trains and yard engines will move with the current of traffic, except may move against current of traffic between 6th Street Jct and Trinity River upon verbal permission of NRTC train dispatcher or NRTC yardmaster.

**ENNIS SUBDIVISION**

(d) When necessary to go beyond end of two main tracks, Trinity River, trains and engines observing signal displaying green aspect may proceed without flag protection. If northward governing signal at end of two main tracks displays a yellow or red aspect, single main track must not be obstructed without permission from train dispatcher and under flag protection when required.

Following will govern movements on M.P. tracks, Fort Worth Yard:

- (a) Between MP 251.2 (west end Centennial Yard) and MP 243.9 (east end East Yard), directions eastward and westward.
- (b) Between Fort Worth interlocking, MP 245.6 and Peach Street, MP 243.2, directions northward and southward.

Trains and engines will move with current of traffic using right hand track in direction of movement, except movements may be made in either direction or on either track between Fort Worth Interlocking, MP 245.6, and east end East Yard, MP 243.9, when authorized by a block signal displaying proceed indication.

Except as provided in paragraph 2, movements of trains and engines against current of traffic must not be made except as follows:

- (a) When authorized by train order.
- (b) When movement is protected as prescribed by Rule 99.

Following will govern movements on FWD tracks, Fort Worth Yard, between Tower 55 and FWD North Yard.

- (a) All tracks are yard tracks.
- (b) Tower 55 and Tower 60 are Interlocking and Interlocking Signals and rules govern.
- (c) Movements must not exceed 20 MPH.
- (d) When block signal, without number plate, displays stop indication, train or engine after stopping may proceed after being authorized by FWD yardmaster, North Yard.
- (e) Westward movements must not pass fouling point Drill Track, MP 2, without authority of FWD yardmaster North Yard.
- (f) Eastward movements leaving FWD North Yard must obtain permission from FWD yardmaster before leaving North Yard.

**RULE D-97.** Applies between Forest Ave. and Belt Jct.

**RULE 98. Railroad crossings at grade not interlocked:**

**Sherman:** (SSW and BN Crossing) Protected by gate normal position for BN movement.

**MP 123.5 Paris:** M.P. crossing protected by stop signs.

**MP 123.6 Paris:** BN crossing protected by gate. Normal position for SP. Movements approaching this crossing must not exceed 6 MPH until crossing covered.

**RULE 99-C.** Will apply between the following stations:

- South Sherman Jct and Gifford
- Fort Worth and Garrett

**RULE 103.** At locations indicated below a member of crew must take position at crossing to afford warning to traffic:

Waxahachie — Highway 287 on compress lead

**RULE 220 and 220-A.** Crews arriving Denison will retain any train orders pertaining to track conditions between Denison and Sherman to be used on next eastward trip from Denison.

**ENNIS SUBDIVISION**

**RULE 221. Unit for display of flashing white light installed at following location:**

Station	Location	Direction
Groesbeck	Signal 1709	Eastward

Bremond is a train-order for westward trains only.

**RULE 306: Block signals with "P" plates:**

Eastward	Protection	Westward
	Spring switch east end siding, Rice	P-2193
	Spring switch east end siding, Corsicana	P-2087
P-2044	Spring switches, Angus	P-2027
P-1874	Spring switches, Gude	P-1857
P-1710	Spring switches, Groesbeck	P-1695
P-1354	Culvert and Embankment, MP 132	P-1307

**RULE 538. Spring switches equipped with facing point locks located as follows:**

Location	Normal Position
Rice	East end siding Main Track
Corsicana	East end siding Main Track
Angus	West and east end siding Main Track
Gude	West and east end siding Main Track
Groesbeck	West and east end siding Main Track

**Spring switches not equipped with facing point locks located as follows:**

Location	Normal Position
Plano* <sup>#</sup>	SSW Conn. SP Main Track
Ennis*	West end yard West lead
Ennis*	East end yard Main Track
Corsicana	Siding—Shed track Siding
Hearne*	West end yard Austin Subdiv. Main Track

\*Equipped with switch point indicators.

<sup>#</sup>Unit for display of flashing white light installed on Signal D-2815. When white light is flashing, it indicates spring switch is in normal position. When white light is not flashing or is extinguished, trains must stop and open and close spring switch by hand removing any obstruction.

**RULE 606. Sherman: Tower 16 MP 328.8.**

**Fort Worth: Tower 55 M.P. Crossing MP 52.7**

**Fort Worth: ATSF Connection MP 51.3**

Interlocking signal governing westward movements MP 51.26 and interlocking signal governing eastward movements MP 51.30.

Signals and dual control switches controlled and operated by ATSF train dispatcher, Fort Worth.

**Waxahachie: Compress track crossing with F.W.&D. main track.**

No operator on duty. Normally lined for F.W.&D.

F.W.&D. siding, which crosses SP compress track at this location, is not protected by interlocking.

SP movements not governed by interlocking signals but by STOP signs located in advance of each derail on each side of crossing, and SP train or engine movements will stop clear of STOP signs, following which a member of crew will proceed to crossing and if no train or engine movements are seen or heard approaching from either direction on F.W.&D. main track or siding will unlock box located on post, read and be governed by instructions posted therein governing operation of interlocking. Signals and derails must be restored to normal position after use.

**Corsicana: SSW Crossing MP 210.2**

**Hearne: M.P. Crossing MP 120.7**

**RULE 680. Denison MKT Crossing Tower 93, MP 337.4.**

**ENNIS SUBDIVISION**

After proceed indication received and movement does not pass governing interlocking signal within 12 minutes, signal will then display STOP indication.

Push buttons located on masts of SP interlocking signals do not actuate MKT signals but are to be used to clear signals after 12 minutes has expired or to make reverse movements.

Time release push buttons adjacent to MKT crossing may be used as prescribed by Rule 681. If signals do not clear after operation of push button, movements may be made after complying with Rule 663(c).

**On Richardson Industrial District lead track, MP 277.90, ATSF crossing.**

**Plano: SSW Crossing, MP 282.1.**

**Fort Worth: Tower 53 MKT crossing, MP 50.2.**

**Midlothian: Tower 94, ATSF crossing MP 23.1.**

**Waxahachie: Tower 67 MKT crossing MP 12.8.**

**RULE 705. Indicators located as follows:**

Illum. Letter	On Signal	Approaching	Authorizes and Requires Movement as Follows
M	SA	Corsicana	Proceed on main track to east end siding.
S	SA	Corsicana	Enter siding.
M	2087	Corsicana	Proceed on main track to west end siding.
S	2087	Corsicana	Enter siding.

**RULE 760. CTC in effect on main track between MP 337.4, Denison and MP 329.1, Sherman.**

Signals controlled by operator, Sherman, acting upon authority of train dispatcher.

Operator must not clear absolute signal for movement into CTC until permission from train dispatcher has been obtained and engineer informed of instructions relating to track conditions, if any.

Light type signals without identification plates which can display yellow aspect only, are located as follows:

Westward signal MP 328.1, Sherman.

To avoid blocking street crossings, trains that are to enter CTC should not pass these signals unless yellow light is displayed, except when it is known movement into CTC will be authorized.

**Frisco Jct and South Sherman Jct**

CTC in effect on main track between fouling points SP and BN main tracks, Frisco Jct, and fouling points SP and BN main tracks, South Sherman Jct.

Signals controlled by operator, Sherman, acting upon authority of train dispatcher.

Operator must not clear signals for a movement from BN at Frisco Jct or South Sherman Jct, until permission from train dispatcher has been obtained and engineer informed of instructions relating to track conditions, if any.

**Garrett and Ennis**

CTC in effect on main track between fouling points Ennis Line and Fort Worth Branch at Garrett, and MP 232.7 west end yard, Ennis.

Signals controlled by operator, Ennis, acting upon authority of train dispatcher.

When westward trains do not leave yard, Ennis, in their turn as ordered, operator must be notified.

**Bremond and Hearne**

CTC in effect on main track and sidings between west switch, siding Bremond and west end interlocking limits, Hearne.

# Position in train of placarded cars containing hazardous materials

NOTE: Cars with same placards may be placed next to each other.

Shippers may use either words or numbers on placards. Numbers shown are samples. Other numbers may appear on placards.

Cars placarded:	Cars placarded:	Cars placarded:	Any loaded placarded tank cars:	Any empty placarded tank cars:	Placarded loaded cars other than tank cars:	Cars placarded:

## RESTRICTIONS

Must not be nearer than the sixth car from the engine occupied caboose or passenger car. If total number of cars in train does not permit, must be placed as near the middle of train as possible but not nearer than the second car from the engine, occupied caboose or passenger car

**MUST NOT BE NEXT TO:**

Engine, occupied caboose or passenger car	X	X	X	X	X	
Car occupied by guard or escort	X(1)	X(1)		X(1)		
Loaded plain flat car	X	X		X		
Loaded bulkhead flat car	X(2)	X(2)		X(2)		
Loaded TOFC/COFC flat car	X(3)	X		X(4)		
Car loaded with vehicles	X	X		X(5)		
Open top car with shiftable load	X(2)	X(2)		X(2)		
Car with internal combustion engine in operation. Car with any heating apparatus or any lighted stove, heater or lantern	X	X		X		
Car placarded EXPLOSIVES A		X	X	X		X
Car placarded POISON GAS	X		X	X		X
Car placarded RADIOACTIVE	X	X		X		X
Any loaded placarded car (other than COMBUSTIBLE or same placard)	X	X	X			

**NO RESTRICTIONS**

(1) A placarded rail car must be next to and ahead of any car occupied by the guards or technical escorts accompanying this car. However, if a car occupied by guards or technical escorts is equipped with a lighted heater or stove, it must be the fourth car behind any car placarded EXPLOSIVES A.

(2) Restriction applies only when any of the lading protrudes beyond the car ends or when any of the lading extending above the car ends is liable to shift so as to protrude beyond the car ends.

(3) Cars placarded EXPLOSIVES A may be placed next to each other.

(4) Restriction applies only to loaded flatbed or opentop trucks and trailers and to loaded trucks and trailers without securely closed doors.

(5) Restriction does NOT apply to a car loaded with vehicles secured by a device designed for that purpose and permanently installed on the car and of a type generally accepted for handling in interchange between railroads.

# SWITCHING RESTRICTIONS

THE FOLLOWING CARS MUST NOT BE:  
CUT OFF IN MOTION, NOR BE  
IMPACTED BY CARS ROLLING UNDER  
THEIR OWN MOMENTUM

ANY CAR PLACARDED  
EXPLOSIVES A OR POISON GAS



OR

A TOFC OR COFC VEHICLE  
DISPLAYING ANY PLACARD

OR

TANK CAR LOAD OF FLAMMABLE GAS



RED PLACARD WITH  
NUMBER 2 FLAMMABLE GAS

HOW TO DISTINGUISH TANK CARS  
PLACARDED FLAMMABLE GAS, FROM  
FLAMMABLE, FROM COMBUSTIBLE  
USING THE NUMBERED PLACARDS

USE SINGLE DIGIT NUMBER AT  
BOTTOM TO TELL FLAMMABLE GAS FROM  
FLAMMABLE LIQUID



NUMBER 2  
FLAMMABLE GAS



NUMBER 3  
FLAMMABLE LIQUID

USE BOTTOM WHITE TRIANGLE  
TO IDENTIFY COMBUSTIBLE PLACARDS

# ENNIS SUBDIVISION

## RULE 825. Instructions for applying hand brakes:

Sherman — BN Yard not less than three brakes must be set before engine is detached.

Fort Worth — Tracks 1, 2, 3, 4, old Main and Lead — Not less than seven brakes on west end of cars east of Broadway Street.

Tracks 7 through 18, — Not less than two brakes on west end of cars east of Broadway Street.

Gifco — Not less than five brakes.

Mansfield — When switching Carnation Can Company, crews must cut in air brakes and must set hand brakes on all cars left in Carnation spur.

Ennis — Not less than five brakes on east end of cars left unattended on either main track or long track east of Gilmer Street.

RULE 827. Location of Dragging and/or Derailed Equipment Detectors. MP 145.6, 147.0, 166.1, 172.8, 175.0, 177.7, 196.0 and 207.4.

## HOT BOX DETECTORS

MP	Type	Directions	MP	Type	Directions
127.9	C	Both	225.0	D**	Westward
147.0	C	Both	237.7	D**	Eastward
175.0	C	Both	6.5*	D**	Eastward
205.1	C	Both			

\* Fort Worth Branch

\*\*Recorder at Ennis

RULE 827-A. Westward "K" trains on Fort Worth Branch must stop and crew make walking inspection of entire train from both sides between MP 40.0 and MP 42.0.

Westward "K" trains must stop and crew make walking inspection of entire train from both sides at MP 319 between McKinney and South Sherman Jct.

RULE 872. Will not apply at Denison, Sherman, Miller, Fort Worth, Ennis, Corsicana and Hearne.

## AIR BRAKE RULES

RULE 33. Restrictive grades.

### FORT WORTH BRANCH

Eastward Ft. Worth to Garrett			Westward Garrett to Ft. Worth		
MP	MP	MPH	MP	MP	MPH
48.5	40.0	25	40.0	48.5	25

## MILLER YARD LIMITS

### SPECIAL INSTRUCTIONS

#### Rule P. Impaired Side Clearance:

MP	DESCRIPTION	MP	DESCRIPTION
273.3	Bridge	6.1	Bridge
12.9	Bridge	5.5	Bridge
11.6	Bridge	5.3	Bridge
8.5	Bridge	260.2	Bridge
7.4	Bridge	258.3	Bridge

RULE 10-J. Location of speed signs not located at distance prescribed:

Speed Sign Location (MP)	Distance from Beginning of Restriction (Mile)	Speed Sign Location (MP)	Distance from Beginning of Restriction (Mile)
	EASTWARD		WESTWARD
260.1	0.0	260.7	0.0



## MILLER YARD LIMITS

### RULE 93. Location of yard limits:

260.2	Miller (Ennis Line) .....	257.1
	Miller (Athens Branch) .....	313.9

### RULE 98. Railroad crossings at grade not interlocked:

**East Dallas:** ATSF crossing on industrial lead track of SP and main track and switching lead of ATSF. Protected by gate and lights, normal position is for ATSF. When movement is completed over crossing, gate must immediately be restored to normal position.

### RULE 306. Block signals with "P" plates:

Eastward	Protection	Westward
Spring Switch east end siding, Miller .....		P-2581

### RULE 538. Spring switch not equipped with facing point lock located as follows:

Location	Normal Position
Miller .....	East end siding .....
	Main Track

### RULE 606. MP Jct: Tower 119, M.P. Crossing

#### Dallas: Tower 19, ATSF Crossing

Two-unit light type interlocking signal, located on signal bridge 610 feet west of Forest Ave., governing eastward movements between Union Depot is SP diverging route.

#### Between Tower 19 and Tower 10

ATSF and SP tracks, Dallas, between SP connection, Tower 19, and SP connection, Tower 10, are signalled for movements in either direction. Movements will be governed by signal indication. Signals and power-operated switches are controlled from Tower 19.

Trains and engines must not exceed restricted speed on these tracks and protection against other trains and engines is not required.

Movements through turnouts, crossovers, and curves must not exceed 10 MPH.

Train or engine stopped by stop signal and cause is not apparent, member of crew will communicate with control station. If authorized to proceed, member of crew must examine all switches and derails to next governing signal.

Except as provided above, the Operating Rules and Regulations of each Company, for its respective employees, will govern.

#### Tower 10, ATSF Crossing on yard track east of Dallas Yard:

Signals controlled by operator, Tower 19.

### RULE 705. Indicators located as follows:

Illum. Letter	On Signal	Approaching	Authorizes & Requires Movement as Follows
M.....	2581	Miller .....	Proceed on main track to absolute signal west end drill track.
S.....	2581	Miller .....	Enter siding.

### RULE 760. M.P. Jct and West End Drill Track, Miller

CTC in effect on main track and siding between MP 4.8 (M.P. Jct) and MP 260.0 (west end drill track), Miller and on both routes at Belt Jct to east end double track.

Signals controlled by operator, Belt Jct, acting upon authority of train dispatcher, except eastward absolute signal M.P. Jct and Junction switch and signals at Briggs are handled by operator, M.P. Jct who must obtain authority for each movement from operator, Belt Jct, before signals are cleared.

Eastward trains approaching Miller finding governing absolute signal displaying indication permitting train to proceed on main track are authorized to proceed on main track to fouling point east end siding.

## MILLER YARD LIMITS

Restrictions that may be imposed by automatic block signals must be complied with.

Switch to Industry track MP 4.2 near Briggs, is hand operated. To enter main track, permission must first be obtained from operator, then if block indicator indicates "block clear" switch may be lined. When switch is lined, absolute signal at fouling point should display proceed.

Upon request from crew member holding work limits and clock time limits, operator at Belt Jct may operate power switch to I.V.O. spur, power switch at east end double track and first power switch east of east end double track, for switching moves at this location, after an understanding as to movements has been reached.

**RULE 812.** Movements over Union Terminal Co. trackage between Forest Ave. and Terminal Jct will be made in accordance with the Rules and Regulations of the Transportation Department of the Southern Pacific Transportation Co.

Interlocking limits extend between Forest Ave. and Terminal Jct.

Switches and signals at Tower 19 are controlled by Operator Tower 19.

Switches and signals between Tower 19 and Dallas Union Sta. are controlled by operator U.T. South Tower (Tower 2).

Switches and signals between Dallas Union Sta. and Terminal Jct are controlled by operator U.T. North Tower (Tower 1).

When a Single Unit Signal displays a Lunar aspect within these interlockings comply with SP Rule 289.

### MAXIMUM SPEEDS ON U.T.CO. TRACKAGE

BETWEEN	ALL TRAINS
Forest Ave. and Eastward absolute Signal Tower 19 .....	10
Eastward absolute Signal Tower 19 and Terminal Jct. ....	20
Curve at Terminal. ....	10
On other than main tracks .....	10

### MISCELLANEOUS

Train and engine movements and employes working within Miller Yard Limits will be under the supervision of the San Antonio Division Officers and will be governed by Southern Pacific Rules and Regulations of the Transportation Department.

### SPEED ON OTHER THAN MAIN TRACKS:

M.P. Jct through connection between SP and M.P. main tracks .....	20
All other tracks, Miller Yard Limits .....	10

### CERTAIN-TEED MANUFACTURING CO.

Hand brakes should be set on two south cars when shoving North Side, Inside, and South Side tracks. When cutting bridge on North Side tracks, there will be two hand brakes set on cars just north of bridge.

Flashing Red light on side of building North Side track, when flashing indicates bridge is down. Before switching North Side light must be extinguished by Certain-Teed employee. When light is extinguished it indicates bridge is clear.

### HOOKER CHEMICAL CO.

Red and white employees working signs will be placed on their track outside of fence. This industry cannot be switched unless sign removed by industry employee. If sign is in place and no one available to remove sign Miller Yardmaster should call Hooker Chemical to have sign removed.

## ALL SUBDIVISIONS

### SPECIAL INSTRUCTIONS

**RULE 1 and 3.** Standard Time may be obtained from Houston telephone extension 6098, 6069 or 6083.

**RULE S-72.** Eastward trains are superior to trains of the same class in the opposite direction.

**RULES 505.** Where automatic protection is provided for movements from an adjacent track to main track, "Key-Releases", with time-release feature, may be installed on signal case near fouling point to clear signal in one track when control circuit of other track is occupied.

If governing signal displays stop indication and no train approaching, member of crew may insert switch key in slot below governing signal number on signal case and turn SLOWLY one complete turn to right, remove key and wait until time-release of 3 minutes has functioned, after which signal should display proceed indication if block is clear.

**RULE 825.** At terminals where instructions require application of hand brakes on freight trains, outgoing crews must not release hand brakes until road engine is coupled and brake system charged and blue signal removed.

**RULE 827.** Where high and/or wide load, dragging and/or derailed equipment detectors are installed as listed under subdivisions, revolving red beacon will be mounted on hot box detector house on post or relay case adjacent to detector and will be normally dark. When detector is activated, the revolving red light will be displayed. Train must be stopped and a walking inspection made of entire train.

When a revolving red beacon light is observed prior to engine passing detector location, train may proceed without stopping for inspection. Report must be made to train dispatcher promptly.

### HOT BOX DETECTORS

Each hot box detector has a white light continuously illuminated on track side of detector instrument house. When a hot bearing is detected, the white light will start flashing. When flashing light is observed, train must be stopped promptly and inspection made to locate hot bearing(s).


The absence of a white light continuously illuminated on the track side of detector instrument house is an indication detector may be inoperative. Under such circumstances, train must be stopped and all bearings inspected except under the following conditions:

- If employees other than members of crew make a rolling inspection (train speed not to exceed 20 MPH) on both sides.
- If the monitor display board on a Type C detector displays "000" after train has passed scanner location.
- If personnel at location of recorder of a Type D detector advises it is safe to proceed to terminal.

The absence of a white light must be promptly reported to train dispatcher. To avoid unnecessary delay to trains passing an inoperative hot box detector, train dispatcher may authorize such trains to make the required walking inspection or rolling inspection at another location provided it is no more than 10 miles in advance of or beyond detector site.

## ALL SUBDIVISIONS

### TYPE C: NUMERICAL DISPLAY BOARD WITH INDICATOR LIGHTS

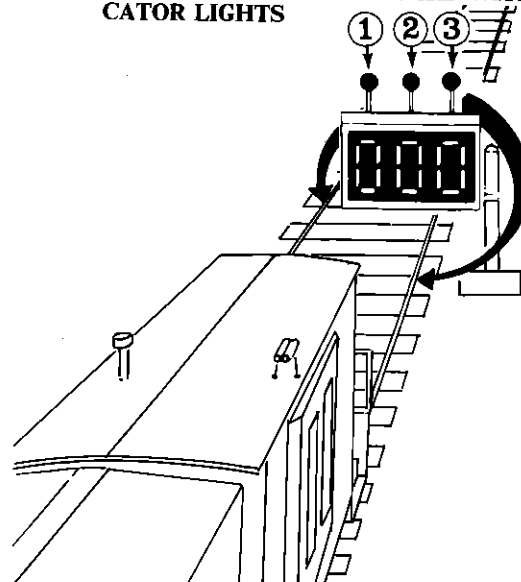


The diagram depicts a Type C hot box detector's monitor display board and indicator lights as it would be viewed looking back after rear of train has passed detector site. The indicator lights identified ①②③ are normally dark, but when a hot bearing is detected, lights ① (right side of train) or ③ (left side of train) will immediately display a flashing white light to identify the side of train on which the hot bearing was detected.

When an additional hot bearing is detected, the center indicator light ② will also commence flashing. To assist in locating hot bearing, the detector will count the number of axles from the first hot bearing detected to the rear of train. Two seconds after train has passed the detector, the numerical board will illuminate and display the accumulated axle count for 90 seconds.

The following are the various displays possible as would be viewed looking back from rear of train and the corresponding required train inspection:


### DISPLAY                      REQUIRED INSPECTION




No inspection required.




Inspection for one hot bearing on the 234th axle from rear of train on side indicated. If hot bearing is not located, all bearings of car indicated as well as five cars ahead and behind must be inspected on BOTH SIDES.



Inspect for two or more hot bearings from rear of train to and including the 095th axle on indicated side. If two or more hot bearings are not located, inspect all bearings from rear of train to and including five cars ahead of indicated axle on BOTH SIDES.



Inspect for two or more hot bearings from rear of train to and including the 153rd axle on BOTH SIDES. If hot bearing is not found on indicated axle, inspect all bearings on car indicated as well as five cars ahead on BOTH SIDES.



Inspect for two hot bearings on each side of the 126th axle from rear of train. If hot bearings are not located on indicated axle, all bearings of car indicated as well as five cars ahead and behind must be inspected on BOTH SIDES.

**ALL SUBDIVISIONS**

**TYPE D. REMOTE READOUT AT TERMINAL**

When white light is flashing on instrument house, train must be stopped promptly and crew member must contact personnel at location of recorder to determine location of hot bearing to be inspected. If hot bearing is not located, all bearings of car indicated as well as five cars ahead and behind must be inspected on both sides.

Personnel at recorder may authorize train to proceed to terminal without making inspection.

**CHECKING FOR JOURNALS SUSPECTED OF OVERHEATING**

Crew members must have in their possession a tempilstik, if available, when making ANY walking inspection of train.

Passenger cars with bearings located behind the wheels (Amfleet equipment) will not permit the use of tempilstik. Hot bearing on these cars will be indicated by strong odor (stink) from built-in heat indicator.

When a roller bearing car experiences two hot box detector actuations and overheated journal cannot be found, car must be set out. Connecting crew, if any, must be notified by incoming crew of any roller bearing car experiencing a hot box actuation and car was not set out.

**CONTINUOUS WELDED RAIL (CWR) TRAINS**

A box car, or high-side gondola car must be positioned on each end of CWR train as a buffer car during all movement except preparatory to and during unloading or loading.

When making walking inspection of a CWR train carrying a full or partial load, the following items must be inspected:

- a. Check for undesired movement of rail. The tops of rails are painted adjacent to the tie-down rack on the tie-down car which is located near center of train. Paint marks on each tier of rail must be in line; otherwise, this is an indication of an undesired movement of rail.
- b. Check each rail end to make certain it overhangs the last supporting roller by at least 12 feet and is no closer than 12 feet from the next empty roller. Rails are marked 12 feet from each end.

When any of these conditions are not as required, train must not be moved until train dispatcher has been contacted and further instructions are received.

**HAZARDOUS MATERIALS**

**RULE 827-A.** Unless specifically authorized by superintendent, "K" trains (excluding locomotives) must not exceed 8,000 feet, except, between Eagle Pass and Spofford and between Spofford and Glidden, must not exceed 10,000 feet.

**RULE 874.** Enginemen must specifically look for defects on Shock Absorber on Locomotives equipped with HTC Trucks.

What To Do in Case Defect is Noted:

1. Reduce train speed to not over 50 MPH.
2. Notify train dispatcher of defective condition.
3. Enter defect on Form CS 2326 for correction.

**AIR BRAKE RULES**

**RULE 9.** The following series of cars are equipped with empty-load brake system which has semi-automatic change-over feature:

SSW 75700-75799	SP 354000-354749	SP 491000-491059
SSW 78500-78599	SP 463500-464899	SP 492000-492039
SP 333500-334605	SP 467500-467549	SP 500604
SP 337500-337599	SP 480000-480193	SP 590000-590099
SP 345000-345699		

The following series of cars are equipped with empty-load brake system, which has automatic change-over feature:

SP 323000-323239	SP 345750-355299	SP 481000-481149
SP 329310-329359	SP 463337	SP 590100-590131
SP 329620-329629	SP 463486	SP 595500-595624
SP 337600-337699	SP 464900-467049	

**ALL SUBDIVISIONS**

**RULE 14.** Unless otherwise restricted maximum tonnage to be handled behind engines with helpers entrained:

TERRITORY	*Road Engine	Helper Engine
All main tracks . . . . .	10,000 . . . . .	8,500

\* Not including portion of tonnage being shoved by helper engine.

**RULE 24.** Will apply at East Yard.

**RULE 24-G.** Will apply at Valentine, Sanderson, Del Rio, Glidden, Hearne, Austin, Yoakum and Ennis.

**RULE 33.** Unless otherwise restricted, trains may operate at maximum speed permitted by "TOPS" ID symbol provided.

1. Tons per axle of operative dynamic brake does not exceed 350 tons; and
2. Total cars in train, tons per operative brake and the number of mechanical refrigerator cars (TOPS CODE; "RML or RM") meet the requirements of the following table.

TONS PER OPERATIVE BRAKE FOR ENTIRE TRAIN				
	80 + to 85	85 + to 90	90 + to 95	95 + to 100
Total Length of Train in Cars	# of Mech Reefer Cars Required	# of Mech Reefer Cars Required	# of Mech Reefer Cars Required	# of Mech Reefer Cars Required
40 or less	None	None	None	None
41-45	None	None	None	3
46-50	None	None	4	8
51-55	None	5	10	16
56-60	7	14	26	32
61-65	14	28	35	43
66-70	30	38	45	53
71-75	39	48	55	63
76-80	48	56	64	72
81-85	58	66	74	82
86-90	67	76	85	
91-95	77	86		
96-100	87			

Trains that do not qualify under the above table may operate at speed specified in following table not exceeding maximum speed allowed by "TOPS" ID symbol provided:

1. Tons per axle of operative dynamic brake does not exceed 500 tons; and
2. Total cars in train, and tons per operative brake meet the requirements of the following table:

(This table is only to be used to compute allowed speeds above 45 MPH.)

Number Of Cars In Train	TONS PER OPERATIVE BRAKE			
	80 + to 85	85 + to 90	90 + to 95	95 + to 100
1 to 40	speed sign speed	speed sign speed	speed sign speed	speed sign speed
41 to 45	speed sign speed	speed sign speed	speed sign speed	speed sign -5 MPH
46 to 50	speed sign speed	speed sign speed	speed sign -5 MPH	speed sign -10 MPH
51 to 55	speed sign speed	speed sign -5 MPH	speed sign -10 MPH	speed sign -15 MPH
56 to 60	speed sign -5 MPH	speed sign -10 MPH	speed sign -15 MPH	speed sign -20 MPH
61 to 65	speed sign -10 MPH	speed sign -15 MPH	speed sign -20 MPH	
66 to 70	speed sign -15 MPH	speed sign -20 MPH		
71 to 75	speed sign -20 MPH			

**RULE 49.** Not more than 10 locomotives operative or inoperative, may be entrained on head end of any train.

**ALL SUBDIVISIONS**

**MISCELLANEOUS**

**1. SPEED RESTRICTIONS FOR TRAINS**

a. Trains identified with multiple TOPS train identification symbols (example BSMFF/BSMFY 24) are authorized to operate at the highest maximum authorized speed permitted for any symbol within the train identity. Speed restrictions on empties, car containing hazardous materials, and restricted cars are still applicable in determining maximum authorized speed.

b. When moving against current of traffic, or when movement is not protected by block signals, speed of passenger trains and light engines must not exceed 59 MPH and speed of freight trains must not exceed 49 MPH, nor may speed exceed that applying to normal operation.

**2. SPEED RESTRICTIONS FOR LOCOMOTIVES:**

LOCOMOTIVE NUMBER	MAX-IMUM SPEED	CLASSIFICA-TION	DYN BRK	STARTING TRACTIVE EFFORT	WGT 000
<b>SP-SSW</b>					
1000-1002	70	AS600	SF	102,000	408
@1010-1013	65	ES400		65,250	261
@1100	65	ES408		51,750	207
@1105-1127	65	ES408	ST	58,250	233
@1191-1199	65	ES409		59,250	237
@1300-1337	65	ES410		61,750	247
1500-1542	70	ES615	ST	82,500	330
@1600-1613	70	GS400	EF	70,000	280
@2250-2316	65	ES412		62,250	249
@2450-2759	65	ES415		65,250	261
2868-2899	70	ES418	ST	63,250	253
2961-2970	70	ES620		97,500	390
2971-2976	50	ES620		104,000	416
3100-3101	70	GS425	SF	67,000	268
3102-3109	70	ES625		95,500	390
3186-3196	70	EP418	ST	65,000	260
3197-3199	70	EP430	EF	70,000	280
3200-3209	70	EP636	ET	102,500	410
3301-3886	70	EF418	ST	63,250	253
4050-4153	70	EF420	ST	65,250	261
4160	70	EF420	ET	65,750	263
4200-4249	70	EF420	ET	66,500	266
4300-4451	70	EF618	ST	90,000	360
4800-4844	70	EF420	EF	69,250	277
5002-5017	70	EF423	ST	66,000	264
5100-5114	70	GF423	EF	66,500	266
5300-5325	70	EF623	ET	104,250	417
6300-6681	70	EF425	ET	66,500	266
6901-6921	70	EF625	ET	97,500	390
7030-7033	70	SF428	SF	70,000	280
@7200-7201	70	EF435	EF	69,500	278
@7230-7231	70	EF435	EF	69,500	278
7300-7399	70	EF630	BF	102,750	411
7400-7599	70	EF632	BF	98,500	394
7600-7607	70	EF430	ET	67,560	278
7608-7677	70	EF430	EF	69,500	278
7770-7883	70	GF430	EF	70,000	280
7900-7929	70	GF630	EF	104,850	419
7930-7936	70	GF630	ET	104,750	419
@7940-7967	70	EF430	EF	69,500	278
#8230-8299	70	EF630	EF	97,750	391
#8300-8341	70	EF630	EF	102,500	410
#8350-8391	70	EF630	EF	102,500	410
#8489-8573	70	EF630	EF	102,500	410
8585-8599	70	GF633	EF	104,750	419
8600-8687	70	GF633	ET	104,750	419
8688-8796	70	GF633	EF	104,750	419
8800-9156	70	EF636	ET	103,500	414
#9157-9404	70	EF636	EF	102,750	411
#9500-9504	70	EF642	ET	103,250	413
<b>AMTRAK:</b>					
200-360	70	EP430A		63,500	254
361-390	70	EP430A		64,750	259
700-724	70	GP630A		96,500	386
<b>ATSF:</b>					
@2700-2784	70	EF423		65,750	263
@2800-2961	70	EF425		66,500	266
@3000-3074	70	EF420		66,250	265
@3100-3174	70	EF420		66,250	265
@3200-3284	70	EF423		65,750	263
@3300-3460	70	EF425		66,500	266
3500-3560	70	EF420		65,750	263
3600-3705	70	EF423		66,000	264
3800-3839	70	EF435		79,500	265
4000-4019	70	EF623		98,000	392
@4500-4579	70	EF624		95,750	383
@4600-4679	70	EF626		96,750	387
5000-5019	70	EF630		98,000	392
#5020-5194	70	EF630		97,500	390
#5200-5213	70	EF636		97,000	388
5300-5489	70	EF636		98,000	392
5490-5499	70	EF636		98,000	392

**ALL SUBDIVISIONS**

LOCOMOTIVE NUMBER	MAX-IMUM SPEED	CLASSIFICA-TION	DYN BRK	STARTING TRACTIVE EFFORT	WGT 000
5500-5624	70	EF636		98,000	392
5625-5714	50	EF636		98,000	392
5900-5939	70	EF636-A		98,750	395
5940-5948	70	EF636-A		103,000	412
5950-5989	70	EF636-A		98,750	395
5990-5998	70	EF636-A		103,000	412
6300-6348	70	GF423		65,750	263
6350-6404	70	GF423		66,000	264
7484-7499	70	GF436		69,250	277
7500-7519	70	GF623		98,750	395
@7900-7909	70	GF628		99,000	396
8000-8152	70	GF630		103,000	412
8500-8524	70	GF633		98,000	392
8700-8799	70	GF636		98,000	392
<b>BN:</b>					
@602-761	70	EF415		62,750	251
@766-853	70	EF418		62,500	250
@1350-1365	70	EF414		60,750	243
1400-1499	70	EF418		64,250	257
@1524-1673	70	EF415		63,500	254
@1700-1980	70	EF418		64,750	259
@1990-1997	70	EF418		62,000	248
2001-2071	70	EF420		65,250	261
2072-2154	70	EF420		66,750	267
2200-2254	70	EF423		65,250	261
2255-2369	65	GF38-2		55,000	267
2500-2545	70	EF425		65,500	262
2550-2566	65	GP35		51,200	260
2567-2574	65	GP35		51,200	261
2575-2582	65	GP35		51,200	262
3000-3039	70	EF430		68,750	275
3040-3064	65	GP40-2		54,050	262
3100-3109	65	GP50-2		62,000	275
5000-5199	70	GF630		103,250	413
5200-5208	70	GF623		92,500	370
5210-5233	65	GF425		66,800	267
5300-5394	70	GF630		104,000	416
5400-5429	70	GF425		67,750	271
5450-5465	70	GF428		68,750	275
5470-5484	70	GF430		68,750	275
5485-5492	70	B30-7		57,000	275
5500-5599	70	GF630		104,250	417
5600-5641	70	GF625		98,000	392
5650-5677	70	GF628		98,000	392
5700-5765	70	GF633		102,750	411
5770-5799	70	U30-B		57,000	268
5800-5944	70	GF630		104,000	416
@6000-6059	70	EF615		86,000	344
@6100-6206	70	EF618		86,500	346
@6240-6255	70	EF624		86,500	346
6300-6324	70	EF630		95,500	382
6325-6385	50	EF630		96,500	386
#6394-6399	70	EF630		92,750	371
6400-6567	70	EF636		98,500	394
6592-6599	70	EF636		99,000	396
6600-6645	70	EF636		96,750	387
6650-6696	65	SD45		80,300	381
6700-6799	70	EF630		104,250	417
6800-6807	70	EF630		104,250	417
6808-7053	50	EF630		104,250	417
7054-7291	70	EF630		104,750	419
7800-7831	50	EF630		104,250	417
7832-7899	70	EF630		104,250	417
7900-7940	70	EF630		103,750	415
8000-8099	70	EF630		103,750	415
8100-8181	65	EF630		103,750	415
9900-9925	70	EF624		56,000	224
<b>C&amp;NW:</b>					
707-712	70	EF418		62,500	253
802-823	70	EF423		66,100	264
824-866	70	EF425		66,500	266
867-895	70	EF630		102,750	411
901-920	70	EF636		103,500	414
921-929	70	EF630		102,750	411
930-936	70	GF630		104,750	419
937-977	70	EF636		103,500	414
1725-1777	70	EF418		62,500	253
4501-4536	70	EF418		62,500	253
6601-6621	70	EF618		90,000	360
6801-6935	50	EF630		102,750	411
<b>MoPAC:</b>					
2009-2334	70	EF420		65,750	263
2600-2616	70	EF420		65,750	263
#3090-3321	70	EF630		98,000	392
3500-3529	70	EF435		83,400	278
4500-4684	70	GF423		67,500	266
#6000-6073	70	EF630		98,000	392
<b>SOU:</b>					
210-214	70	EF425		63,250	253
215-223	70	EF625		94,000	376
2525-2643	70	EF423		62,750	251
2645-2715	70	EF425		64,500	258
2716-2822	70	EF430		63,250	253
2823-2886	70	EF420		62,250	249

**ALL SUBDIVISIONS**

LOCOMOTIVE NUMBER	MAX-IMUM SPEED	CLASSIFICA-TION	DYN BRK	STARTING TRACTIVE EFFORT	WGT 000
3000-3099	70	EF625		95,500	382
3100-3169	70	EF636		98,750	395
3170-3200	70	EF630		94,750	379
3201-3287	50	EF630		93,750	375
3288-3328	70	EF630		93,750	375
3800-3804	70	GF630		98,500	394
3805-3814	70	GF633		99,250	397
3815-3818	70	GF436		70,000	280
3900-3969	70	GF423		64,500	259
3970-4023	70	GF423		65,250	261
4600-4605	70	EF426		63,750	255
5000-5256	70	EF420		69,250	277
7000-7092	70	EF435		64,250	257
SL-SF:					
100-124	65	EF415		64,500	258
400-478	65	EF420		66,800	267
633-699	65	EF420		66,800	267
700-732	65	EF425		65,500	262
750-774	65	EF430		66,800	267
808-831	65	GF425		66,800	267
832-862	65	GF430		67,000	268
863-870	65	GF430		68,800	275
900-948	65	EF636		95,300	381
950-957	50	EF630		97,500	390
CR:					
1967-2023	70	GF423			
2100-2112	70	EF420			
2168-2249	70	EF423			
2250-2399	70	EF425			
2500-2685	70	GF425			
2700-2788	70	GF423			
2822-2823	70	GF428			
2830-2889	70	GF430			
2890-2970	70	GF433			
3000-3385	70	EF430			
3620-3692	70	EF425			
6000-6051	70	EF625			
6066-6239	70	EF636			
6240-6357	70	EF630			
#6358-6499	70	EF630			
6500-6519	70	GF625			
6520-6534	70	GF628			
6535-6539	70	GF630			
6540-6578	70	GF633			
6579-6583	70	GF630			
6587-6599	70	GF636			
6654-6666	50	EF636			
6700-6718	70	GF623			
6900-6924	70	EF618			
6925-6959	70	EF620			
7000-7483	70	EF418			
7496-7559	70	EF418			
7656-8281	70	EF420			
MKT:					
170-230	70	EF430		69,500	278
300-321	70	EF420		65,250	261
350-352	70	EF423		66,500	266
600-636	70	EF630		98,250	393

# Equipped with HTC trucks and truck snubbers.

⊙ RCE Master.

⊙ RCE Remote.

⊙ Mother. ⊙ Mate.

@ Locomotives not equipped with alignment control couplers.

A locomotive that is NOT listed in these tables must NEVER be operated in a train unless it is specifically authorized by a train dispatcher. Authorization must include the speed and weight of the locomotive as well as its starting tractive effort if it is to be operative in the train.

Unless otherwise notified in writing or verified by a Mechanical Department employee, a locomotive that does not appear in these tables must be considered as a locomotive that is NOT equipped with alignment control couplers.

**ALL SUBDIVISIONS**

3. SPEED RESTRICTIONS WITH CERTAIN EQUIPMENT	MAIN TRACKS OTHER THAN BRANCHES	MAIN TRACKS ON BRANCHES
Scale test cars		
WO-2, SPMW 5868, SSW 99203 (must be handled next to caboose)	30	30
Relief outfits with steam derrick	45*	25*
Locomotive Crane-Piledrivers		
SPMW 4027, 4028, 4029, 4088, 4091, 5437, 5479, 5595, 5852, 5870, 5874, 5899, 6601, 6602, 6603, 6604, 8000, 8002, 8003, 8004, SSWMW 96404 and 96405:		
With boom in place, either end forward ⊙	25*	15*
With boom disconnected, heavy end forward	40	25
boom end forward	20*	15*
With boom disconnected and removable counterweight properly positioned, either end forward	40	25
Steam pile driver SPMW 4053	35	25*
Jordan Spreaders:		
Moving backward	25	20
Moving forward	35	35

\*On curves where authorized speed is more than 15 MPH speed must be reduced to 5 MPH less than speed permitted.

⊙When moving in train with boom in place, operator must be on board.

SPMW 5479, 5499 and 5497 are restricted to 45 MPH.

Locomotive Crane Pile Drivers SPMW 4088, 5479, 5852, 5899, SSWMW 96404 and SSWMW 96405 are to be handled in trains as locomotive cranes except they must always move with boom disconnected.

Unless specifically authorized, all relief outfit cranes, locomotives cranes and pile drivers must not operate over lines having maximum load limits of less than 263,000 lbs. and must observe all restrictions applying to cars weighing over 210,000 lbs.

**MAXIMUM SPEED PERMITTED WITH RELIEF CRANES**

Location	Main Track
SPMW 7140 El Paso	45
SPMW 5846 Sanderson	45
SPMW 5848 Lafayette	35
SSWMW 96006 Pine Bluff	45
SPMW 7113 Houston	35

On curves where speed is 45 MPH or less speed must be reduced to 5 MPH less than shown on speed signs.

Relief outfits, with boom forward, are restricted to 20 MPH.

4. OTHER SPEED RESTRICTIONS	MPH
Trains handling hazardous material listed in Rule 827-A	55
Engines operated from other than lead locomotive in direction of movement	20
Trains handling empty bulkhead flat cars	45
Trains handling empty, specially equipped gondola cars (TOPS car kind code "GP")	45
Trains handling pipe loaded on 89 ft. flat cars	55
Trains handling empty PC598500-598999 and CR598500-598999	45
Loaded Continuous Welded Rail (CWR) Trains	45*
Trains handling empties, except cabooses	55

\*Loaded CWR trains must be handled separately from other trains.

## ALL SUBDIVISIONS

### 5. PLACEMENT OF RESTRICTED CARS IN TRAIN WITH OR WITHOUT HELPER

(a) Cars measuring less than 42 feet in length must not be coupled to a car longer than 73 feet in length. This restriction will not apply:

1. To the rear 20 cars of train.
2. On the Ennis Subdivision west of Corsicana.

Empty tank cars measuring less than 35 feet in length must be entrained in rear 20 cars of train.

This restriction will not apply on the Ennis Subdivision west of Corsicana.

(b) When the tonnage of any train including local or road switcher exceed 4,000 tons, the weight of each of the first five cars behind engine must weigh 50 tons or more.

This restriction will not apply:

1. When there are less than 20 loaded cars in train.
2. When there are not 5 loaded cars in train weighing 50 tons or more.
3. On the Ennis Subdivision west of Corsicana.

(c) Trains having over 9,000 tons must not have any car weighing less than 60 tons in the head 2/5 of total train tonnage excluding road and helper engines.

(d) It is the responsibility of yardmasters and conductors to take into consideration the overall distribution of tonnage when making up or changing consist of train. The following are requirements governing train makeup.

1. Trains consisting of predominantly empty cars will have any block of loaded cars entrained near the head end.
2. Train makeup requirements will prevail when they conflict with outstanding blocking instructions unless authorized by Division Officer or Chief Dispatcher.
3. Train mass profile graph should be used to monitor train makeup when available.
4. When in doubt as to proper distribution of train tonnage, yardmaster or conductor will contact Division Officer or Chief Dispatcher for instruction.

(e) Cabooses are not to be moved other than at rear of train, unless specifically authorized, except when handling a few cars in local or road switcher service

### 6. DOUBLE STACK ARTICULATED CARS (ID5, ID3):

(a) They are to be positioned on headend of train when loaded.

(b) They are to be considered the equivalent of three (3) cars when:

1. Determining tons per operative brake;
2. Train tonnage requires the first five cars behind engine to weigh 50 tons or more;
3. Considering maximum load limit.

(c) Series SP 513302 to SP 513343 are to be considered the equivalent of five cars and SP 513301 the equivalent of three cars when determining proper position in train of placarded cars containing hazardous materials.

7. Maximum tonnage of a train must not exceed 11,000 tons, except for unit trains. Maximum length of a train must not exceed 12,000 feet excluding locomotives.

## ALL SUBDIVISIONS

### 8. LOAD LIMIT (Car and Contents):

Other than Branches .....	315,000 pounds
Exception:	
Sherman-Richardson .....	263,000 pounds
Branches .....	263,000 pounds

Exception:

Eagle Pass Branch .....	263,000 pounds
Gonzales Branch .....	251,000 pounds
Giddings Branch .....	270,000 pounds
Llano Branch (MP 90.5 to Llano) .....	210,000 pounds
Marble Falls Branch .....	251,000 pounds
Cameron Branch .....	251,000 pounds
Fort Worth Branch .....	(1) 263,000 pounds
Athens Branch .....	251,000 pounds

(1) When tank cars with gross loads of more than 263,000 lbs. are handled between Garrett and Fort Worth, separate with normal load or empty and speed of train must not exceed ten (10) MPH over bridges 7.66, 9.50, 28.94 and 34.38.

Unless authorized by Superintendent, heavier loads will not be handled.

Where maximum load limit shown is 263,000 pounds or more, gross loads of 395,000 pounds may be handled on 6 (six) axle cars when load limit of car is not exceeded.

Where maximum load limit is 263,000 pounds or more, gross loads of 526,000 pounds may be handled on 8 (eight) axle cars, with a maximum of 3 (three) cars coupled together, when load limit of cars is not exceeded.

9. Passenger trains are restricted to movements on main tracks, sidings and designated receiving tracks at Passenger Depots only. Movement on any other tracks must be authorized by the Chief Train Dispatcher.





