

When using train order Form Y or track bulletin Form B, the following words will be used in granting verbal authority and acknowledging such authority.

"Foreman (name) (of Gang No. \_\_\_\_\_) using train order (or track bulletin) No. \_\_\_\_\_ line No. \_\_\_\_\_ between MP \_\_\_\_\_ and MP \_\_\_\_\_ on \_\_\_\_\_ Subdivision".

- (a) To authorize train or engine to pass a red flag, or enter limits, without stopping, the following will be added:

" (train) may pass red flag located at MP \_\_\_\_\_ (or enter limits) without stopping".

Train or engine may pass red flag, or enter limits, without stopping, continuing to move at restricted speed and must stop short of men or equipment fouling track.

- (b) To authorize a train or engine to proceed at a speed greater than restricted speed, the following will be added:

" (train) may proceed through the limits at \_\_\_\_\_ MPH (or at "maximum authorized speed.")

Train may proceed through the limits at the prescribed speed unless otherwise restricted.

- (c) To require train or engine to move at a speed less than restricted speed, the following will be added:

" (train) proceed at restricted speed but not exceeding \_\_\_\_\_ MPH (adding if necessary "until reaching MP \_\_\_\_\_").

Train must not exceed the prescribed speed and must be prepared to stop short of men or equipment fouling the track or a red flag to the right of the track.

These instructions must be repeated by the engineer and "OK" received from employee giving them before they are acted upon.

When the word **STOP** is written in the Stop column, train or engine must not enter the limits until verbal authority is received from employee in charge as prescribed by example (a) above.



**SANTA FE**  
**SAFETY FIRST**



The  
**Atchison, Topeka and Santa Fe**  
**Railway Co.**

**EASTERN LINES**

**MIDDLE DIVISION**

**TIME TABLE No.**

**2**

**IN EFFECT**  
**Sunday, April 27, 1986**

**At 12:01 A.M.**  
**Central Time**

**This Time Table is for the exclusive use**  
**and guidance of Employees.**

**D. F. DUNCAN**  
Superintendent  
Newton, Kansas

**R. L. BANION**  
General Manager  
Topeka, Kansas

**B. J. HEATH**      **C. L. HOLMAN**  
V. G. NAIL  
Asst. General Managers  
Topeka, Kansas

H. B. LAMPE, Asst. Superintendent	Newton, Kans.
W. F. HENRY, Trainmaster	Emporia, Kans.
R. A. KURTZ, Trainmaster	Newton, Kans.
C. A. GARRISON, Road Foreman of Engines	Newton, Kans.
G. A. EARNSHAW, Road Foreman of Engines	Emporia, Kans.
D. E. EDINGTON, Safety Supervisor	Newton, Kans.
W. F. BOWEN, Asst. Superintendent	Oklahoma City, Okla.
J. A. COVINGTON, Trainmaster	Arkansas City, Kans.
R. F. SMITH, Asst. Trainmaster	Oklahoma City, Okla.
T. M. JOYCE, Asst. Trainmaster	Oklahoma City, Okla.
J. R. FITZGERALD, JR., Road Foreman of Engines	Arkansas City, Kans.
D. G. SIBLEY, Rules Instructor	Oklahoma City, Okla.
A. W. DeMOSS, Safety Supervisor	Oklahoma City, Okla.
B. R. TUCKER, Supervisor of Air Brakes— General Road Foreman of Engines	Topeka, Kans.

S. P. MARK, Chief Dispatcher	Newton, Kans.
M. C. SEELY, Asst. Chief Dispatcher	Newton, Kans.
R. C. COPPOCK, Asst. Chief Dispatcher	Newton, Kans.
R. L. TREFETHEN, Asst. Chief Dispatcher	Newton, Kans.
D. G. LITTON, Asst. Chief Dispatcher	Newton, Kans.

**TRAIN DISPATCHERS—NEWTON, KANSAS**

W. G. WILLIAMS	G. H. HARDEY	R. L. DEPLER
B. J. ECKERT	K. F. KIEFER	B. N. PENDLAY
W. G. BURTON	M. A. PORTER	C. L. COWEL
D. L. RESER	D. G. CARGILL	D. B. HOLLINGSHEAD
W. P. VAUGHN	T. A. STUTZMAN	R. D. ROBINSON
D. S. OSBURN	D. R. LACKEY	M. L. STIVER
J. L. MITCHAM	W. G. LORD	J. M. NORTHROP

**AVOID DAMAGE—SWITCH CUSTOMERS CARS CAREFULLY  
OVERSPEED Couplings are DAMAGING.**

Damage to freight or car can be avoided by always keeping coupling speed within the safe range—NOT OVER 4 MILES PER HOUR—A BRISK WALK.

**SPEED TABLE**

Table of speeds (minutes and seconds per mile, in terms of miles per hour).

Time Per Mile Min. Sec.	Miles Per Hour	Time Per Mile Min. Sec.	Miles Per Hour	Time Per Mile Min. Sec.	Miles Per Hour
— 36	100	— 58	62.1	1 40	36.0
— 37	97.3	— 59	61.0	1 42	35.3
— 38	94.7	1 —	60.0	1 44	34.6
— 39	92.3	1 02	58.0	1 46	34.0
— 40	90.0	1 04	56.2	1 48	33.3
— 41	87.8	1 06	54.5	1 50	32.7
— 42	85.7	1 08	52.9	1 52	32.1
— 43	83.7	1 10	51.4	1 54	31.6
— 44	81.8	1 12	50.0	1 56	31.0
— 45	80.0	1 14	48.6	1 58	30.5
— 46	78.3	1 16	47.4	2 —	30.0
— 47	76.6	1 18	46.1	2 05	28.8
— 48	75.0	1 20	45.0	2 10	27.7
— 49	73.5	1 22	43.9	2 15	26.7
— 50	72.0	1 24	42.9	2 30	24.0
— 51	70.6	1 26	41.9	2 45	21.8
— 52	69.2	1 28	40.9	3 —	20.0
— 53	67.9	1 30	40.0	3 30	17.1
— 54	66.6	1 32	39.1	4 —	15.0
— 55	65.5	1 34	38.3	4 30	13.3
— 56	64.2	1 36	37.5	5 —	12.0
— 57	63.2	1 38	36.8	6 —	10.0

**TABLE OF CONTENTS**

SUBDIVISIONS	Page
FIRST	4-6
SECOND	7-9
THIRD	10-12
FOURTH	13-15
FIFTH	16
DOUGLASS	17
ENID	21-22
GREAT BEND	31
LARNED	32
LITTLE RIVER	30
MCPHERSON	29-30
OKLAHOMA	18-21
SALINA	28-29
STILLWATER	25
STRONG CITY	23-24
Division Map	26-27
Special Instruction 4 — Amendments and Changes to General Code of Operating Rules	33-36
Special Instructions 5-8 — Various	36-37
Special Instruction 9 — Trackside Warning Devices	37-39
Special Instruction 10 — Joint Track Facilities	39
Special Instruction 11 — Use of U.P. Tracks	39
Special Instruction 12 — Use of S.S.W. Tracks	40
Speed Restrictions — Various Cars	40
Special Instructions 14-16 — Various	40-44
Hazardous Materials Instructions	41-44
Track Profiles	45-48
Modified Signal Aspects	50-51

**EXPLANATION OF CHARACTERS**

- A — Automatic Interlocking
- B — General Orders — Circulars
- C — Office of Communication
- g — Gate — Normal Position  
Against Conflicting Route
- G — Gate — Normal Position  
Against this Subdivision
- Ⓞ — Gate — Left in Position  
last used
- M — Manual Interlocking
- P — Telephone
- Q — Radio Communication
- R — Register Station
- S — Crossing Protected by Stop  
Signs
- T — Turning Facility
- X — Crossover (DT)
- Y — Yard Limits
- MT — Main Track

**EXPLANATION OF ROADWAY SIGNS**

- Temporary Restrictions — Red, Yellow and  
Green flags or Discs
- Permanent Speed Signs — Square or Rectangular  
in shape, Yellow with  
numerals, or Green
- Permanent Stop Signs — Rectangular in shape, Red  
Whistle Sign — Square in Shape, White  
with Letter "W"



**SANTA FE  
SAFETY FIRST**



WEST-WARD ↓		FIRST SUBDIVISION				↑ EAST-WARD	
First Class						First Class	
3						4	
Leave Daily	Station Numbers	Siding Feet	STATIONS		Mile Post	Arrive Daily	
AM 3.15	61200		EMPORIA } 3.2	2-MT BPQT	CTC 112.1	AM 3.40	
			MERRICK } 8.1		115.3	3.49	
	61190		SAFFORDVILLE } 1.3	3-MT	ABS 123.4		
3.25	55250		ELLINOR } 7.0		124.7	3.39	
	61170	11762	STRONG CITY } 4.1		131.7		
	61150		NEVA } 2.5		135.8		
	61145		ELMDALE } 6.5		138.3		
	61140	8583	CLEMENTS } 5.9		144.8		
	61135		CEDAR POINT } 6.2		150.7		
	61130	8079	FLORENCE } 11.4		156.9		
	61125	10487	PEABODY } 0.3		168.3		
			O K T Crossing } 9.7	A	168.6		
	61120	8419	WALTON } 6.3		178.3		
			Mo. Pac. Crossing } 0.5		184.6		
3.40 AM	61100		NEWTON } 3-MT	BPQT	185.1	2.49 AM	
Arrive Daily	(73.0)					Leave Daily	

**CTC IN EFFECT:**

South Track between Merrick and Ellinor.  
Main Tracks between Emporia and Merrick.  
On main track and sidings, Ellinor to Newton.  
Three main tracks Newton between Mo. Pac. crossing M.P. 184.6 and M.P. 185.5.

**RULE 251 IN EFFECT:**

North Track and Middle Track between Merrick and Ellinor.  
RULE 252 authorized between Merrick and Ellinor.

Permanent speed signs are not displayed for movements against the current of traffic. Trains operating against the current of traffic must not exceed speed of 59 MPH for passenger trains ; 49 MPH for freight trains.

Between Merrick and Ellinor current of traffic is westward on North Track, eastward on Middle Track.

Proceed indication on interlocking signal at Merrick and Ellinor authorizes extras with the current of traffic where Rule 251 in effect.

Between Constitution Street (M.P. 111.9) Emporia and interlocking Merrick (M.P. 115.3) first track south of main tracks designated as Yard Track No. 3.

Between Merrick and Ellinor mile posts on South Track designated by "X".

**FIRST SUBDIVISION**

**SPECIAL INSTRUCTIONS**

**1. SPEED REGULATIONS**

(A) MAXIMUM AUTHORIZED SPEED BETWEEN:	MPH	
	Psgr.	Frts.
Emporia and Newton	79	55*
Constitution Street (M.P. 111.9) Emporia and Merrick (M.P. 115.3) Yard Track No. 3	15	15
Newton— Main tracks between Mo. Pac. crossing and interlocking M.P. 186.0; Freight leads between interlocking M.P. 185.6 and Sand Creek Bridge M.P. 186.3	20	20

**\*Maximum authorized speed for freight trains is:**

- 70 MPH provided:
- (1) Train does not contain empty car(s) (10-PACK cars, cabooses and flat cars loaded with empty trailers, containers or container chassis are considered loads).
  - (2) Train does not exceed 5500 tons.
  - (3) Train does not exceed 8500 feet.
  - (4) Train does not average more than 80 tons per car.
  - (5) Locomotive can control speed to 70 MPH without use of air brakes.

**(B) SPEED RESTRICTION — TONNAGE**

Maximum authorized speed for freight trains is:  
45 MPH when averaging 90 tons or over per car, or when train exceeds 7000 tons.

**(C) SPEED RESTRICTIONS — VARIOUS**

LOCATION		MPH
3 Curves,	M.P. 116.2X to 118.1X South Track	75
Curve,	M.P. 122.5X to 123.0X South Track	75
4 Curves,	M.P. 116.2 to 118.9 North Track Middle Track	70
Curve,	M.P. 122.5 to 123.0 North Track Middle Track	75
Curve,	M.P. 126.1 to 126.4	70
Curve,	M.P. 129.4 to 130.0	75
Curve,	M.P. 132.4 to 132.8	70
Curve,	M.P. 133.7 to 133.9	50
Curve,	M.P. 134.2 to 134.8	75
Curve,	M.P. 135.9 to 136.4	65
Curve,	M.P. 136.9 to 137.1	75
Curve,	M.P. 142.2 to 142.5	75
3 Curves,	M.P. 148.0 to 150.5	75
Curve,	M.P. 153.4 to 154.2	75
3 Curves,	M.P. 155.6 to 157.9	75
Curve,	M.P. 160.5 to 160.7	75
3 Curves,	M.P. 161.6 to 163.6	70
2 Curves,	M.P. 164.7 to 165.9	75
Curve,	M.P. 166.4 to 166.8	65
Curve,	M.P. 168.0 to 168.4	45
RR Crossing,	M.P. 168.6 (Auto. Interlocking)*	45
Curve,	M.P. 168.9 to 169.1	45
Curve,	M.P. 170.0 to 170.5	65
Curve,	M.P. 171.2 to 171.4	75
4 Curves,	M.P. 173.3 to 175.9	65
Curve,	M.P. 176.1 to 176.4	75
Curve,	M.P. 180.4 to 180.7	70
Curve,	M.P. 181.8 to 182.3	75
RR Crossing,	M.P. 184.6 (Interlocking)	20

\*If governing signal indicates "STOP", after communicating with Control Station, follow instructions posted in release box.



# FIRST SUBDIVISION

## (D) SPEED RESTRICTIONS — SWITCHES

Maximum speed permitted through turnout of switches, except main track switches listed below, 10 MPH.

"D"—Dual Control Switch			
Station	Type	Location	MPH
Merrick	D	Crossovers between Middle Track and North Track and west crossover between Middle Track and South Track	50
		East crossover between Middle Track and South Track	30
	D	Turnout to Yard Lead	10
		D	Main track turnouts and crossovers
Strong City	D	Both ends siding	30
Neva	D	Turnout to Strong City Subdiv.	20
Clements	D	Both ends siding	30
Florence	D	Both ends siding	30
Peabody	D	Both ends siding	30
	D	Connection to O K T	20
Walton	D	Both ends siding	30
	D	East switch, storage track	10
Newton	D	Main track crossovers and turnouts M.P. 184.5 to M.P. 185.5	30
	D	Turnout to lower yard M.P. 185.6	10

## 3. TRACK SIDE WARNING DEVICES (Special Instruction 9)

Detector Location	Type	Locator Location
M.P. 134.0	HOT BOX AND DRAGGING EQUIPMENT	Eastward M.P. 131.7 Westward M.P. 135.9
M.P. 159.0	HOT BOX AND DRAGGING EQUIPMENT	Eastward M.P. 156.9 Westward M.P. 161.4

WEST-WARD ↓		SECOND SUBDIVISION				↑ EAST-WARD	
First Class							First Class
3							4
Leave Daily	Station Numbers	Siding Feet	STATIONS			Mile Post	Arrive Daily
AM 4.40	61100		NEWTON	} 1-BPQT	} 2-BPQT	185.1	AM *2.39
	61100		SAND CREEK				
	61040	6124	HALSTEAD			194.6	
	61030	10452	BURRTON			203.7	
			BN Crossing			204.1	
	61000		WAY			214.9	
			S.S.W. Crossing			216.5	
*5.12	61000	29903	HUTCHINSON			218.3	*1.49
			Mo. Pac. Crossing			219.2	
5.18	58990		WHITESIDE			223.4	1.35
	58985		PARTRIDGE			229.0	
5.27	58980	10166	ABBYVILLE			235.1	1.27
	58975		PLEVNA			240.7	
	58970		SYLVIA			246.4	
5.38	58968	10300	ZENITH			251.1	1.16
	58964		STAFFORD			257.0	
			Mo. Pac. Crossing			257.2	
5.48	58960	10284	ST. JOHN			266.0	1.05
	58955		DILLWYN			272.8	
	58950		MACKSVILLE			277.6	
6.01	58945	10370	BELPRE			284.9	12.52
	58940		LEWIS			293.3	
	58935	8600	KINSLEY			302.4 (316.7)	
	58930	N4266 S5282	OFFERLE			324.7	
	58925	6675	BELLEFONT			330.3	
	58920	N7768 S5113	SPEARVILLE			336.1	
	58915	6805	WRIGHT			344.7	
*6.52 AM	58900		DODGE CITY			352.5	12.11 AM
Arrive Daily			(153.1)				Leave Daily

### CTC IN EFFECT:

Three main tracks Newton between Mo. Pac. Crossing M.P. 184.6 and M.P. 185.5.

On main tracks Newton to M.P. 219.3.

On main tracks Kinsley to M.P. 352.1.

On sidings Halstead, Burrton, Hutchinson and Kinsley.

### TWC IN EFFECT:

Between Hutchinson and Kinsley.

### RULE 251 IN EFFECT:

Between M.P. 352.1 and Dodge City. Permanent speed signs are not displayed for movements against the current of traffic.

Time of trains at Hutchinson applies at the west siding switch, except time for No. 4 applies at the passenger station, M.P. 218.0.

When trains are to operate "Via Fifth Subdivision", Track Warrant must so indicate.

## SECOND SUBDIVISION

Mile Post location Yard Limits —  
 Hutchinson — East, M.P. 219.3; West, M.P. 222.5  
 Kinsley — East, M.P. 300.1; West, M.P. 302.3  
 Dodge City — East, M.P. 352.1; West, M.P. 354.6

**HAND THROW SWITCHES IN CTC LIMITS — RULE 350(B)**  
 Locations of such switches are listed below:

Town or West of	Mile Post Location	Track Connection
Burrton	203.5 & 203.9	Both ends CLIC Track 0703
Kinsley	316.7	West end CLIC Track 1709
Kinsley	316.8 & 316.9	Both ends CLIC Track 1705
Kinsley	317.4	West end CLIC Track 1707
Offerle	324.9	West end CLIC Track 2403
Spearville	336.3	West end CLIC Track 3603
Wright	345.1	West end CLIC Track 4502
Dodge City	351.8	West end CLIC Track 0133

### SPECIAL INSTRUCTIONS

#### 1. SPEED REGULATIONS

##### (A) MAXIMUM AUTHORIZED SPEED

BETWEEN:	MPH	
	Psg.	Frt.
Newton— Main tracks between Mo. Pac. crossing and interlocking M.P. 186.0; Freight leads between interlocking M.P. 185.6 and Sand Creek Bridge M.P. 186.3	20	20
Newton and Hutchinson	79	55*
Hutchinson and Dodge City	90	55*
Dodge City—Freight lead between east switch and bridge at M.P. 351.0	20	20

\*Maximum authorized speed for freight trains is:

70 MPH provided:

- (1) Train does not contain empty car(s) (10-PACK cars, cabooses and flat cars loaded with empty trailers, containers or container chassis are considered loads).
- (2) Train does not exceed 5500 tons.
- (3) Train does not exceed 8500 feet.
- (4) Train does not average more than 80 tons per car.
- (5) Locomotive can control speed to 70 MPH without use of air brakes.

##### (B) SPEED RESTRICTION — TONNAGE

Maximum authorized speed for freight trains is:

45 MPH when averaging 90 tons or over per car, or when train exceeds 7000 tons.

##### (C) SPEED RESTRICTIONS — VARIOUS

LOCATION	MPH
Curve, M.P. 186.4 to 186.5	65
Curve, M.P. 187.3 to 187.8	50
Crossings, M.P. 203.3 to 204.0	50
RR Crossing, M.P. 204.1 (Interlocking)	50
RR Crossing, M.P. 216.5 (Interlocking)	40
Crossings, M.P. 216.6 to 219.1	30
5 Curves, M.P. 218.1 to 219.1	35
RR Crossing, M.P. 219.2 (Interlocking)	40
2 Curves, M.P. 219.4 to 220.2	55
Curve, M.P. 228.3 to 228.8	80
Curve, M.P. 240.5 to 240.6	85
Curve, M.P. 242.4 to 242.8	80
Curve, M.P. 246.7 to 247.0	80
Curve, M.P. 251.6 to 251.8	80
Curve, M.P. 255.5 to 255.7	80
RR Crossing, M.P. 257.2	50
Curve, M.P. 257.2 to 257.4	50
Curve, M.P. 264.8 to 265.1	80
Crossings, M.P. 265.7 to 266.2	40
Curve, M.P. 266.1 to 266.5	80
Curve, M.P. 268.0 to 268.5	85
Curve, M.P. 269.8 to 270.1	80
Curve, M.P. 297.6 to 297.9	85
2 Curves, M.P. 298.8 to 300.1	80
Curve, M.P. 301.7 to 302.0	55
Crossings, M.P. 301.9 to 302.4	55
Curve, M.P. 302.2 to 302.4	65
2 Curves, M.P. 302.5 to 317.9	80

## SECOND SUBDIVISION

### (C) SPEED RESTRICTIONS — VARIOUS (Continued)

LOCATION	MPH
Curve, M.P. 335.0 to 335.8	80
Curve, M.P. 345.6 to 346.7	80
Curve, M.P. 347.1 to 347.3	75
7 Curves, M.P. 347.9 to 352.0	65
2 Curves, M.P. 352.0 to 352.3 *	20

\*Equipped with westward ATS Inert Inductors.

### (D) SPEED RESTRICTIONS — SWITCHES

Maximum speed permitted through turnout of switches, except main track switches listed below, 10 MPH.

Station	Type	Location		MPH
		"D"—Dual Control Switch	"S"—Spring Switch	
Newton	D	Main track crossovers and turnouts	M.P. 184.5 to M.P. 185.5	30
	D	Turnout to lower yard	M.P. 185.6	10
Sand Creek	D	Crossover	M.P. 186.0	40
	D	Turnouts to yard	M.P. 187.8	10
	D	Crossovers	M.P. 187.8	30
	D	Turnout from or to south track,	M.P. 190.0	40
Halstead	D	Both ends siding		40
Burrton	D	Both ends siding		40
Way-Hutchinson	D	Second crossover west of SSW crossing between siding and main track		10
	D	Crossover west of SSW crossing between siding and CLIC track 301		10
	D	Other turnouts and crossovers		30
Abbyville	S	Both ends siding		30
Zenith	S	Both ends siding		30
St. John	S	Both ends siding		30
Belpre	S	Both ends siding		30
Kinsley	D	Turnouts and crossovers between Depot and Colony Ave.		30
	D	West end siding	(M.P. 318.4)	40
Offerle	D	Both ends both sidings		20
Bellefont	D	Both ends siding		20
Spearville	D	Both ends both sidings		20
Wright	D	East end siding		20
	D	Turnout from or to South Track	M.P. 344.7	40
Dodge City	D	Turnout east end Freight lead		20
	D	Double Crossovers	M.P. 350.1	30

### 2. TRACKS BETWEEN STATIONS

Name	CLIC No.	Location	Length (Feet)
Whiteside Storage Track*	0501	M.P. 233.4	4176
Partridge Storage Track*	0503	M.P. 229.0	4126
Plevna Storage Track	0506	M.P. 240.7	4255
Sylvia Storage Track*	4601	M.P. 246.4	2212
Stafford Storage Track*	5701	M.P. 257.0	3720
Dillwyn Storage Track*	7201	M.P. 272.8	4253
Macksville Storage Track	7701	M.P. 277.6	4081
Lewis Storage Track	9301	M.P. 293.3	4176

\*Must not be used for meeting and passing trains.

Storage tracks must not be blocked without authority of the train dispatcher.

### 3. TRACK SIDE WARNING DEVICES (Special Instruction 9) HOT BOX AND DRAGGING EQUIPMENT DETECTORS

Detector Location	Type	Locator Location
M.P. 192.1	HOT BOX AND DRAGGING EQUIP.	Eastward M.P. 190.5 Westward M.P. 194.0
M.P. 221.4	HOTBOX AND DRAGGING EQUIP.	Radio Readout "Reporter" Type.
M.P. 247.9	HOT BOX AND DRAGGING EQUIP.	Eastward M.P. 246.4 Westward M.P. 249.9
M.P. 275.5	HOT BOX AND DRAGGING EQUIP.	Eastward M.P. 273.5 Westward M.P. 277.2
M.P. 321.2	HOT BOX AND DRAGGING EQUIP.	Eastward M.P. 319.2 Westward M.P. 323.0
M.P. 341.0	HOT BOX AND DRAGGING EQUIP.	Radio Readout "Reporter" Type

WEST-WARD ↓		THIRD SUBDIVISION		↑ EAST-WARD	
Station Numbers	Siding Feet	STATIONS			Mile Post
61100		NEWTON	BPQT	CTC	185.1
		2.9 McGRAW			188.0
54735	6628	3.2 PUTNAM			191.2
54730	7526	4.0 SEDGWICK		CTC	195.2
54725	6710	6.6 VALLEY CENTER BN Crossing			201.8
54700		7.3 WICHITA	BPQTY	ABS	209.1
		1.0 Mo. Pac. Crossing	A		210.1
		1.6 NORTH JCT.	Y		211.7
54710		0.6 WICHITA U.S.			212.3
		0.9 SOUTH JCT.			213.2
	6616	4.2 CONNELL		CTC	217.4
54640	6872	5.6 DERBY			223.0
54620	15184	4.9 MULVANE	T		227.8
54660	6156	10.0 UDALL			237.9
54895	9294	11.8 WN JCT.			249.7
54900		1.1 WINFIELD	PQ		250.8
52720	8023	5.3 HACKNEY			256.1
52700	E7000	7.3 ARKANSAS CITY	BPQT		263.4
		(78.3)			

**CTC IN EFFECT:**

On Three main tracks Newton between Mo. Pac. crossing M.P. 184.6 and M.P. 185.5.

On main track and sidings Newton to M.P. 207.9 Wichita, and North Jct. to Arkansas City.

**RULE 251 IN EFFECT:**

M.P. 207.9 Wichita to North Jct.

Permanent speed signs are not displayed for movements against the current of traffic.

Trains or engines must not foul nor enter main tracks through hand throw switches where Rule 251 is in effect, until authority to do so has been obtained from the train dispatcher. Movement must be made as prescribed by Rule 317.

Proceed indication on controlled signal for Westward trains at end of double track, Wichita and Eastward trains at North Jct., authorizes extras with the current of traffic.

Westward Third Subdivision trains or engines will not leave Sand Creek Yard via McGraw Lead until white train departure light, located west of McGraw Jct. switch, is displayed or authority received from train dispatcher.

Independent track between Wichita and North Jct. is the first track east (geographically) of South Track and will be used by trains and engines as instructed. Eastward movements may be authorized by signal indication at North Jct.

Eastward trains Englewood or Wichita Subdivisions secure permission to proceed eastward from Wichita Junction before passing that point. Yard crews obtain permission to make movement between Wichita Junction and South Jct., or to foul Englewood Subdivision main track from south yard tail track.

Trains and engines between North Jct. and South Jct. will be governed by The Wichita Union Terminal Railway Company Special Rules and Regulations, which provide:

"Between interlocking North Jct. and interlocking South Jct. the two west tracks are main tracks signalled in both directions. Trains and engines using these main tracks will be governed by interlocking and block signals whose indications supersede the superiority of trains for both opposing and following movements on the same track.

**THIRD SUBDIVISION**

Interlocking signals at North Jct. and South Jct. controlled by Santa Fe train dispatcher located at Newton, Kansas.

Except as provided above, crews on trains and engines operating over tracks of the Wichita Union Terminal Railway Company will be governed by rules and regulations of their respective company."

**HAND THROW SWITCHES IN CTC LIMITS — RULE 350(B)**

Locations of such switches are listed below:

Town or West of	Mile Post Location	Track Connection
Putnam	191.0 & 191.2	Both ends CLIC Track 9101
Sedgwick	194.9 & 195.4	Both ends CLIC Track 9502
Valley Center	201.4 & 201.7	Both ends CLIC Track 1002
Connell	216.6 & 217.0	Both ends CLIC Track 1704
Connell	217.2 & 217.4	Both ends CLIC Track 1705
Hackney	256.0 & 256.3	Both ends CLIC Track 0601
Hackney	256.4 & 256.5	Both ends CLIC Track 0602

At Mulvane, track nearest depot is Third Subdivision main track, next track is Fourth Subdivision North Track and next track is Third Subdivision siding.

Mile Post location Yard Limits —

Wichita —

North Jct. — East, M.P. 207.9; West M.P. 211.7.

**SPECIAL INSTRUCTIONS**

**1. SPEED REGULATIONS**

**(A) MAXIMUM AUTHORIZED SPEED**

BETWEEN:	MPH
Newton—	
Main tracks between Mo. Pac. crossing and interlocking M.P. 186.0	20
Freight leads between interlocking M.P. 185.6 and Sand Creek bridge M.P. 186.3	10
Newton and North Jct.	55
North Jct. and South Jct. (W.U.T. Ry.)	30
South Jct. and Arkansas City	55
Arkansas City—	
Main track between hand throw crossover M.P. 262.9 and interlocking M.P. 264.1; CLIC track 198 between interlockings M.P. 262.6 and M.P. 264.1	20

**(B) SPEED RESTRICTION — TONNAGE**

Maximum authorized speed for freight trains is:

45 MPH when averaging 90 tons or over per car, or when train exceeds 7000 tons.

**(C) SPEED RESTRICTIONS — VARIOUS**

LOCATION	MPH
2 Curves, M.P. 185.7 to 186.7	40
Crossings, M.P. 194.5 to 195.6	30
Crossings, M.P. 201.1 to 202.0	45
RR Crossing, M.P. 201.8 (Auto Interlocking)	50
Crossings, M.P. 207.7 to 214.9	40
2 Curves, M.P. 209.6 to 210.6	40
RR Crossing, M.P. 210.1	30
4 Curves, M.P. 211.7 to 213.3	25
Crossings, M.P. 214.9 to 215.6	45
Curve, M.P. 215.3 to 215.5	45
Crossings, M.P. 222.5 to 223.0	30
4 Curves, M.P. 227.7 to 229.8	40
Crossing, M.P. 228.1	40
Crossings, M.P. 237.6 to 238.2	45
6 Curves, M.P. 243.2 to 246.2	45
16 Curves, M.P. 247.5 to 253.6	30
Crossings, M.P. 249.8 to 251.2	45
3 Curves, M.P. 259.7 to 261.2	40
Curve, M.P. 262.7 to 262.9	50
4 Curves, M.P. 263.2 to 263.6	20



### THIRD SUBDIVISION

#### (D) SPEED RESTRICTIONS – SWITCHES

Maximum speed permitted through turnout of switches, except main track switches listed below, 10 MPH.

"D"—Dual Control Switch		"S"—Spring Switch	
Station	Type	Location	MPH
Newton	D	Main track crossovers and turnouts M.P. 184.5 to 185.5	30
	D	Turnout to lower yard M.P. 185.6	10
McGraw	D	Turnout from or to Sand Creek Yard	20
Putnam	D	Both ends siding	40
Sedgwick	D	Both ends siding	40
Valley Center	D	Both ends siding	40
Wichita	D	End of double track westward	40
	D	East end No. 1 yard track	10
	D	Turnout to Independent track	10
North Jct.	D	Turnout to Independent track	10
North Jct. (W.U.T. Ry)	D	Main track crossovers and turnouts	30
South Jct. (W.U.T. Ry)	D	East crossover between main tracks M.P. 213.0	30
	D	Turnout to ATSF Third Subdiv.	30
Connell	D	Both ends siding	40
Derby	D	Both ends siding	40
Mulvane	D	Crossover between Third and Fourth Subdivisions at M.P. 227.3	40
	D	Turnout to west end yard lead	10
	D	Other turnouts and crossovers	30
Udall	D	Both ends siding	40
WN Jct.	D	Turnouts to Douglass Subdivision	25
	D	Turnouts to Kansas City Division	10
	D	Other turnouts and crossovers	30
Hackney	D	Both ends siding	40
Arkansas City	D	East end East siding	40
	S	M.P. 262.3 east end yard lead	10
	D	Crossover between main track and CLIC Track 198 M.P. 262.6	20

#### 3. TRACK SIDE WARNING DEVICES (Special Instruction 9)

Detector Location	Type	Locator Location
M.P. 220.0	HOT BOX AND DRAGGING EQUIPMENT	Eastward M.P. 218.4 Westward M.P. 222.1
M.P. 253.0	HOT BOX AND DRAGGING EQUIPMENT	Eastward M.P. 251.3 Westward M.P. 255.0

WEST-WARD ↓		FOURTH SUBDIVISION		↑ EAST-WARD	
Station Numbers	Siding Feet	STATIONS		Mile Post	
55250	12080	ELLINOR			124.7
55245	6594	GLADSTONE			130.3
55240	10017	BAZAR			136.1
55230	7943	MATFIELD GREEN	P	CTC	144.4
55225	14892	CASSODAY			154.2
55220	14338	AIKMAN			158.4
55215	7010	CHELSEA			165.5
55200		EL DORADO	BPQTY	ABS	174.3
		BN Crossing			185.3
55100	S6646 N9512	AUGUSTA	T		185.7 (199.5)
54685	6784	SALTER		CTC	205.2
54680	6794	ROSE HILL			211.6
54620	6953	MULVANE	T	CTC	220.5
54610	7502	BELLE PLAINE			226.5
		CICERO	DT	ABS	230.6
54600		WELLINGTON			BQPT
		(101.1)			

#### CTC IN EFFECT:

On main tracks and sidings Ellinor to El Dorado (M.P. 174.3); M.P. 201.8 (west of Augusta) to Cicero, and division board M.P. 237.1 to Wellington.

On two tracks: M.P. 171.5 to M.P. 174.3 (El Dorado)  
M.P. 215.8 to M.P. 221.9 (Mulvane)

#### RULE 251 IN EFFECT:

El Dorado M.P. 174.3 to M.P. 201.8 (west of Augusta) and Cicero to division board M.P. 237.1.

Rule 252 authorized between Augusta (M.P. 201.8) and El Dorado (M.P. 174.3), and between Cicero and division board M.P. 237.1.

Permanent speed signs are not displayed for movements against the current of traffic. Trains operating against the current of traffic must not exceed speed of 59 MPH for passenger trains; 49 MPH for freight trains.

Proceed indication on controlled signal at El Dorado, Augusta, Cicero and Wellington authorizes extras with the current of traffic where Rule 251 in effect.

At Mulvane, track nearest depot is Third Subdivision main track, next track is Fourth Subdivision North track, and next track is Third Subdivision Siding. Mile posts on South track designated by "X".

Mile Post location Yard Limits —  
El Dorado — East, M.P. 174.3; West, M.P. 176.3.

#### HAND THROW SWITCHES IN CTC LIMITS—Rule 350(B)

Locations of such switches are listed below:

Town or West of	Mile Post Location	Track Connection
Bazar	135.7 & 136.1	Both ends CLIC Track 3601
Matfield Green	144.4	East end CLIC Track 4402
Aikman	158.2 & 158.4	Both ends CLIC Track 5801
Rose Hill	211.6 & 211.7	Both ends CLIC Track 1202
Belle Plaine	226.1 & 226.6	Both ends CLIC Track 2701

## FOURTH SUBDIVISION

### SPECIAL INSTRUCTIONS

#### 1. SPEED REGULATIONS

##### (A) MAXIMUM AUTHORIZED SPEED

BETWEEN:	MPH	
	Psg.	Fr.
Ellinor and Wellington	70	55*

\*Maximum authorized speed for freight trains is: 70 MPH provided:

- (1) Train does not contain empty car(s) (10-PACK cars, cabooses and flat cars loaded with empty trailers, containers or container chassis are considered loads).
- (2) Train does not exceed 5500 tons.
- (3) Train does not exceed 8500 feet.
- (4) Train does not average more than 80 tons per car.
- (5) Locomotive can control speed to 70 MPH without use of air brakes.

##### (B) SPEED RESTRICTION – TONNAGE

Maximum authorized speed for freight trains is: 45 MPH when averaging 90 tons or over per car, or when train exceeds 7000 tons.

##### (C) SPEED RESTRICTIONS – VARIOUS

LOCATION	MPH
9 Curves, M.P. 142.3 to 147.2	55
3 Curves, M.P. 147.5 to 148.9	60
Curve, M.P. 149.2 to 149.6	55
Curve, M.P. 149.9 to 150.4	65
Curve, M.P. 152.4 to 152.8	65
Curve, M.P. 159.8 to 160.0	65
Curve, M.P. 172.3 to 172.5	60
Curve, M.P. 173.4 to 173.7	45
Curve, M.P. 174.1 to 174.3	South Track 40 North Track 30
Curve, M.P. 175.3 to 175.5	60
Curve, M.P. 179.6 to 179.7	60
Curve, M.P. 182.8 to 183.0	65
RR Crossing, M.P. 185.3 (Interlocking)	50
Crossings, M.P. 185.3 to 186.2	30
7 Curves, M.P. 185.5 to 200.7	50
2 Curves, M.P. 202.4 to 203.2	55
2 Curves, M.P. 204.3 to 204.7	45
Curve, M.P. 205.1 to 205.2	50
2 Curves, M.P. 205.3 to 206.1	55
2 Curves, M.P. 209.5 to 210.4	55
Curve, M.P. 215.6 to 215.8	55
4 Curves, M.P. 219.4 to 221.2	North Track 30
Crossing, M.P. 220.8	North Track 40
Curve, M.P. 217.3X to 217.4X	South Track 65
2 Curves, M.P. 220.0X to 221.4X	South Track 65
Curve, M.P. 228.4 to 228.6	65
Curve, M.P. 233.1 to 233.5	65
Curve, M.P. 236.6 to 237.1	40
Curve, M.P. 237.7 to 237.8	45

## FOURTH SUBDIVISION

### (D) SPEED RESTRICTIONS – SWITCHES

Maximum speed permitted through turnout of switches, except main track switches listed below, 10 MPH.

Station	Type	"D"—Dual Control Switch		"S"—Spring Switch	
		Location	MPH	Location	MPH
Ellinor	D	Main track turnouts and cross-overs	40		
Gladstone	D	Both ends siding	40		
Bazar	D	Both ends siding	40		
Matfield Green	D	Both ends siding	40		
Cassoday	D	Both ends siding	40		
Aikman	D	Both ends siding	40		
Chelsea	D	Both ends siding	40		
El Dorado	D	Turnout from or to South Track	50		
	D	Crossovers M.P. 172.7	40		
	D	Turnouts to depot track and west leg of wye	10		
	D	Crossovers M.P. 174.3	30		
Augusta	S	East end eastward siding	30		
	D	Other turnouts and crossovers	30		
	D	End of double track westward	45		
Salter	D	Both ends siding	40		
Rose Hill	D	Both ends siding	40		
Mulvane	D	Turnout North Track M.P. 215.8	45		
	D	Crossover between Third and Fourth Subdivisions M.P. 220.0	40		
	D	Turnout North Track M.P. 221.9	40		
	D	Other turnout and crossovers	30		
Belle Plaine	D	Both ends siding	30		
Cicero	D	End of double track	65		
Wellington	D	End of double track	40		
	D	Turnouts from or to yard lead and Kansas City Division	20		
	D	East end siding	15		

### 2. TRACKS BETWEEN STATIONS

Name	CLIC No.	Location	Length (Feet)
Vanora Spur	7530	M.P. 177.4	600
KG&E Spur	1204	M.P. 209.3	1,300

### 3. TRACK SIDE WARNING DEVICES (Special Instruction 9)

Detector Location	Type	Locator Location
M.P. 138.1	HOT BOX AND DRAGGING EQUIPMENT	Radio Readout "Reporter" Type.
M.P. 156.8	DRAGGING EQUIPMENT ONLY	
M.P. 166.1	DRAGGING EQUIPMENT ONLY	
M.P. 179.1	HOT BOX ONLY Rotating white light on field side at detector and locator locations.	Eastward M.P. 176.7 Westward M.P. 181.2
M.P. 223.7	HOT BOX AND DRAGGING EQUIPMENT	Eastward M.P. 222.2 Westward M.P. 225.7



WEST-WARD ↓		FIFTH SUBDIVISION		↑ EAST-WARD	
Station Numbers	Siding Feet	STATIONS		Mile Post	
61000		HUTCHINSON	PT	218.3	
		4.4 YA JCT.		222.7	
58645	4073	0.5 YAGGY		223.2	
58640	4142	5.4 NICKERSON		228.6	
		7.0 ST JCT.		235.6	
58635	4281	1.1 STERLING		236.7	
58630	4124	6.2 ALDEN		242.9	
58625	2674	6.1 RAYMOND		249.0	
58620	2650	4.5 CLARENDON		253.5	
58615	4120	5.9 ELLINWOOD	T	259.4	
58610		4.5 DARTMOUTH		263.9	
58500		5.6 GREAT BEND	BPQTY	269.5	
58510		7.8 DUNDEE		277.3	
58515	4130	5.7 PAWNEE ROCK		283.0	
58520	4063	8.8 LARNED		291.8	
58590	4134	10.7 GARFIELD		302.5	
58935		14.2 KINSLEY		316.7	
		(98.4)			

**TWC IN EFFECT:**

Between Hutchinson and Kinsley.

**RULE 94 IN EFFECT:**

Between Hutchinson and M.P. 227.0

Between M.P. 291.8 and M.P. 293.0

Between M.P. 314.2 and Kinsley (M.P. 316.5)

When trains are to operate "Via Fifth Subdivision", Track Warrant must so indicate.

Mile Post location Yard Limits -

Great Bend - East, M.P. 267.8; West, M.P. 275.0

**SPECIAL INSTRUCTIONS**

**1. SPEED REGULATIONS**

**(A) MAXIMUM AUTHORIZED SPEED**

**BETWEEN: MPH**

Hutchinson and Great Bend	49
Great Bend and Kinsley	40

**(B) SPEED RESTRICTION - TONNAGE**

Maximum authorized speed for freight trains is:  
45 MPH when averaging 90 tons or over per car, or when train exceeds 7000 tons.

**(C) SPEED RESTRICTIONS - VARIOUS**

LOCATION		MPH
Crossings,	M.P. 236.4 to 237.0	25
Crossing,	M.P. 259.5	40
Crossings,	M.P. 268.7 to 269.8	30
Crossings,	M.P. 291.4 to 292.0	30

**(D) SPEED RESTRICTIONS - SWITCHES**

Maximum speed permitted through turnout of switches, 10 MPH.

**2. TRACKS BETWEEN STATIONS**

Name	CLIC No.	Location	Length (Ft.)
Great Bend Industrial Spur	7030	M.P. 274.6	9,751

WEST-WARD ↓		DOUGLASS SUBDIVISION		↑ EAST-WARD	
Station Numbers	Siding Feet	STATIONS		Mile Post	
55100		AUGUSTA	T	185.7	
55080		11.3 DOUGLASS		197.0	
55070		5.6 ROCK		202.6	
55060	7495	6.2 AKRON		208.8	
54895	5833	7.2 WN JCT.	P	216.0	
		(30.3)			

**CTC IN EFFECT:**

On main track and sidings Augusta to WN Jct.

**SPECIAL INSTRUCTIONS**

**1. SPEED REGULATIONS**

**(A) MAXIMUM AUTHORIZED SPEED**

**BETWEEN: MPH**

Augusta and WN Jct.	55
---------------------	----

**(B) SPEED RESTRICTION - TONNAGE**

Maximum authorized speed for freight trains is:

45 MPH when averaging 90 tons or over per car, or when train exceeds 7000 tons.

**(C) SPEED RESTRICTIONS - VARIOUS**

LOCATION		MPH
Crossings,	M.P. 185.3 to 186.2	30
6 Curves,	M.P. 186.1 to 188.7	35
Curve	M.P. 191.7 to 191.8	50
Bridge,	M.P. 195.2	40
Crossings,	M.P. 196.8 to 197.4	35
Curve,	M.P. 197.4 to 197.5	50
5 Curves,	M.P. 198.8 to 200.0	25
Curve,	M.P. 211.2 to 211.5	40
2 Curves,	M.P. 215.6 to 216.0	25

**(D) SPEED RESTRICTIONS - SWITCHES**

Maximum speed permitted through turnout of switches except main track switches listed below, 10 MPH.

"D" - Dual Control Switch.

Station	Type	Location	MPH
Augusta	D	Turnout to Fourth Subdivision	30
Akron	D	Both ends siding	40
WN Jct.	D	East end siding	30
		Turnouts to Third Subdivision	25

**2. TRACK SIDE WARNING DEVICES (Special Instruction 9)**

Detector Location	Type	Locator Location
M.P. 198.8	HOT BOX AND DRAGGING EQUIPMENT	Eastward M.P. 197.4 Westward M.P. 201.5

WEST-WARD ↓		OKLAHOMA SUBDIVISION		↑ EAST-WARD	
Station Numbers	Siding Feet	STATIONS		Mile Post	
52700	E7000 W9900	ARKANSAS CITY	BPQT	263.4	
		0.8 ATSF Crossing		264.2	
52680	12185	NEWKIRK		275.8	
52300	32442	PONCA CITY	BPQT	288.9	
52290	8616	MARLAND		300.3	
52280	7447	RED ROCK		306.8	
52270	7993	OTOE		312.7	
		3.6 BLACK BEAR BN Crossing	A	316.3	
52100	S3624 N5515	PERRY	P	321.6	CTC
52090	8563	ASP		328.4	
52060	10149	MULHALL		338.8	
52050	8915	LAWRIE		347.2	
51700	14725	GUTHRIE	PQT	352.6	
51695	9735	SEWARD		360.1	
51690	7041	EDMOND		370.1	
51680	8029	BRITTON		376.8	
		3.8 NOWERS		380.6	
51500		3.4 OKLAHOMA CITY	T	384.0	ABS
		1.7 BURNETT		385.7	
51500	8460	3.1 FLYNN	BPQT	390.5	
51420	8351	4.4 MOORE		393.2	
51415	6678	8.6 NORMAN		401.8	
51410	9075	6.2 NOBLE		408.1	
51400		9.2 PURCELL	BP	417.3	
		(153.2)			

**CTC IN EFFECT:**

On main tracks and sidings, Arkansas City to Nowers, and Burnett to Purcell.

On two tracks: Burnett (M.P. 385.7) to M.P. 387.4.

**RULE 251 IN EFFECT:** Nowers to M.P. 383.6 (Oklahoma City).  
M.P. 384.6 (Oklahoma City) to Burnett.

Permanent speed signs are not displayed for movements against the current of traffic.

**RULE 94 IN EFFECT:**

End of Double Track Nowers to Burnett.

Trains to be operated from Black Bear via BN must secure BN track warrant at ATSF Station Perry.

AT&SF trains will use M-K-T tracks between Oklahoma City (Harter) and Shawnee (36.7 miles). Eastward trains must secure M-K-T train orders at Harter. Westward trains at Shawnee will secure M-K-T train orders by calling operator Harter Yard Telephone 235-9361 or 235-7299. AT&SF track warrant and track bulletins secured at Flynn will be retained for westward trip from Shawnee. Rule 105 in effect on AT&SF tracks at Shawnee.

**OKLAHOMA SUBDIVISION**

**HAND THROW SWITCHES IN CTC LIMITS—Rule 350(B)**

Locations of such switches are listed below:

Town or West of	Mile Post Location	Track Connection
Seward	366.7 & 366.8	Both ends CLIC Track 0450
Edmond	372.5	West end CLIC Track 0421
Edmond	373.9	West end CLIC Track 0411
Flynn	388.2	East end CLIC Track 0711
Flynn	388.7	West end CLIC Track 0502
Moore	392.7	West end CLIC Track 0550
Purcell	417.1 & 417.5	Both ends CLIC Track 4110

**SPECIAL INSTRUCTIONS**

**1. SPEED REGULATIONS**

(A) MAXIMUM AUTHORIZED SPEED BETWEEN:

	MPH
Arkansas City— Main track between hand throw crossover M.P. 262.9 and interlocking M.P. 264.1; CLIC track 198 between interlockings M.P. 262.6 and M.P. 264.1	20
Arkansas City and Nowers	55
Nowers and Burnett	20
Burnett and end of Two Tracks M.P. 387.4 North Track	40
South Track	55
M.P. 387.4 and Purcell	55
OG&E Sooner Spur between main track switch and Loop Track switch	30
Flynn and GM Yard (Flynn Industrial Spurs)	20
Shawnee Industrial Spur	20
Purcell Yard Track No. 1	20

(B) SPEED RESTRICTION — TONNAGE

Maximum authorized speed for freight trains is:  
45 MPH when averaging 90 tons or over per car, or when train exceeds 7000 tons.

(C) SPEED RESTRICTIONS — VARIOUS LOCATION

	MPH
Curve, M.P. 262.7 to 262.9	50
5 Curves, M.P. 263.2 to 264.2	20
RR Crossing, M.P. 264.2 (Interlocking)	30
3 Curves, M.P. 264.4 to 265.0	30
2 Curves, M.P. 265.3 to 266.2	50
Crossings, M.P. 275.4 to 276.4	45
Crossings, M.P. 285.7 to 288.3	40
Curve, M.P. 287.7 to 287.9	50
Crossings, M.P. 288.3 to 290.4	30
Curve, M.P. 290.4 to 290.6	45
RR Crossing, M.P. 316.3 (Auto. Interlocking) *	50
Crossings, M.P. 320.8 to 321.7	50
Curve, M.P. 351.7 to 351.8	45
2 Curves, M.P. 351.9 to 352.7	50
Crossings, M.P. 352.1 to 352.9	50
Crossings, M.P. 369.7 to 370.4	35
Crossings, M.P. 373.0 to 378.0	50
Curve, M.P. 377.1 to 377.4	40
7 Curves, M.P. 378.6 to 380.6	45
11 Curves, M.P. 380.7 to 385.7	20
Crossings, M.P. 385.7 to 386.0	30
Crossings, M.P. 386.2 to 389.0	50
Crossings, M.P. 391.4 to 396.2	30
Crossings, M.P. 398.7 to 399.6	50
Crossings, M.P. 399.6 to 404.1	30
Crossings, M.P. 406.4 to 409.7	40
2 Curves, M.P. 415.8 to 416.5	50
FLYNN INDUSTRIAL SPURS M.P. 388.8	
Curve, M.P. 0.0 to 0.3	10
2 Curves, M.P. 3.8 to GM Yard	10

\*If governing signal indicates "STOP", after communicating with Control Station, follow instructions posted in release box.

# OKLAHOMA SUBDIVISION

## (D) SPEED RESTRICTIONS - SWITCHES

Maximum speed permitted through turnout of switches, except main track switches listed below, 10 MPH.

"D"—Dual Control Switch		"S"—Spring Switch	
Station	Type	Location	MPH
Arkansas City	D	Crossover between main track and CLIC Track 198 M.P. 264.1	20
	D	West end west siding	40
	S	M.P. 262.3 east end yard lead	10
Newkirk	D	Both ends siding	40
Ponca City	D	East end yard lead	10
	D	Other turnouts and crossovers	40
Marland	D	Both ends siding	40
Red Rock	D	Both ends siding	40
	D	OG&E Sooner Spur M.P. 308.2	30
Otoe	D	Both ends siding	40
Perry	D	Both ends north siding	30
	D	Both ends south siding	20
Asp	D	Both ends siding	40
Mulhall	D	Both ends siding	40
Lawrie	D	Both ends siding	40
Guthrie	D	Crossover between Enid Subdiv. and Oklahoma Subdiv.	30
	D	Other turnouts and crossovers	40
Seward	D	Both ends siding	40
Edmond	D	Both ends siding	40
Britton	D	Both ends siding	40
Nowers	D	End of double track	40
Burnett	D	Crossovers M.P. 385.8	40
	D	From or to North Track M.P. 387.4	40
Flynn	D	Both ends siding	30
	D	West switch, CLIC Track 506	10
Moore	D	Both ends siding	40
Norman	D	Both ends siding	40
Noble	D	Both ends siding	40
Purcell	D	Both ends Yard Track No. 1	20

## 2. TRACKS BETWEEN STATIONS

Name	CLIC No.	Location	Length (Feet)
Kildare Coop Spur	0700	M.P. 281.2	1984
OG&E Sooner Spur	3010	M.P. 308.2	34,141
Orlando	5600	M.P. 332.7	300
Team Track (Pipe Yard)	0450	M.P. 366.7	710
Central Fixtures Spur	0421	M.P. 372.5	464
Leonhardt Spur	0429	M.P. 372.9	756
Ralston Purina Lead (Dereco)	0422	M.P. 373.0	11,024
Cain's Coffee	0411	M.P. 373.9	983
Flynn Industrial Spur	—	M.P. 388.8	22,338
Tyler Simpson	0581	M.P. 400.2	598
Midwest City Industrial Spur	—	M.P. 482.6 and 483.3	
Shawnee Industrial Spur	—	M.P. 123.4 to 134.0	10.6 miles
Runaround	3702	M.P. 125.3	700
Wolverine Tube	3701	M.P. 125.3	1178
Mobile Chemical Company	3703	M.P. 125.9	1591
Allen Bradley	3704	M.P. 127.6	914

## 3. TRACK SIDE WARNING DEVICES (Special Instruction 9)

Detector Location	Type	Locator Location
M.P. 279.0	HOT BOX AND DRAGGING EQUIPMENT	Eastward M.P. 276.0 Westward M.P. 280.9
M.P. 304.0	HOT BOX AND DRAGGING EQUIPMENT	Eastward M.P. 302.0 Westward M.P. 306.0
M.P. 341.5	HOT BOX ONLY	Eastward M.P. 339.1 Westward M.P. 343.9
M.P. 367.6	HOT BOX AND DRAGGING EQUIPMENT	Eastward M.P. 366.1 Westward M.P. 369.1
M.P. 405.4	HOT BOX AND DRAGGING EQUIPMENT	Eastward M.P. 403.2 Westward M.P. 407.6

# OKLAHOMA SUBDIVISION

## 3. TRACK SIDE WARNING DEVICES (Continued)

Detector Location	Type	Locator Location
M.P. 341.5 *	SHIFTED LOAD DETECTOR	Westward M.P. 343.9
M.P. 347.8 *	SHIFTED LOAD DETECTOR	Eastward M.P. 347.8 & M.P. 346.0
M.P. 407.4 *	SHIFTED LOAD DETECTOR	Westward 409.5
M.P. 416.2 *	SHIFTED LOAD DETECTOR	Eastward M.P. 414.0

\* — Detectors on both sides of track which will not clear man on side of cars.

WEST-WARD ↓		ENID SUBDIVISION		↑ EAST-WARD	
Station Numbers	Siding Feet	STATIONS			Mile Post
54100		KIOWA	TY		
		0.8 Mo. Pac. Crossing	g		0.6
51870	6420	8.2 BURLINGTON			8.8
51850	5022	10.9 CHEROKEE	Y		19.7
51840	2202	12.1 JET			31.8
51830	2235	8.2 NASH			40.0
51820	1968	7.8 HILLSDALE			47.8
51810	4129	10.4 BLANTON	Y		58.2
		2.8 BN JCT.		BN RR	61.0
		0.9 BN JCT.			61.9
		0.1 O.K.T. Crossing	A		62.0
		0.1 BN JCT.			62.1
51800		0.2 ENID	BPQTY	TWC	62.3
		0.9 BN Crossing	S		63.2
51735	2918	9.6 FAIRMONT			72.8
		0.8 BN Crossing	A		73.6
51725	1422	6.8 DOUGLAS			80.4
51715	6250	8.0 MARSHALL			88.4
51710	1427	6.7 LOVELL			95.1
51705	2196	7.7 CRESCENT			102.8
51700		13.9 GUTHRIE	PQTY		116.7
		(116.9)			

## TWC IN EFFECT:

Between Kiowa and Guthrie.

Between outlying wye switch and Kiowa, on Plains Division, CTC Rules in effect on main track and siding.

AT&SF trains will use BN track between Enid and Blanton (BN M.P. 548.2), must secure permission before entering track and will be governed by Rule 93.

At Blanton and BN Jct. junction switches normally lined for BN Railroad.



## ENID SUBDIVISION

### Mile Post location Yard Limits —

Kiowa — East, M.P. 0.1; West, M.P. 3.0  
 Cherokee — East, M.P. 16.5; West, M.P. 22.0  
 Blanton — East, M.P. 56.4; West, M.P. 58.1  
 Enid — East, M.P. 60.5; West, M.P. 67.0  
 Guthrie — East, M.P. 114.0; West, M.P. 116.4.

### SPECIAL INSTRUCTIONS

#### 1. SPEED REGULATIONS

##### (A) MAXIMUM AUTHORIZED SPEED

BETWEEN:	MPH
Kiowa and M.P. 65.0	30
M.P. 65.0 and Guthrie	49

##### (B) SPEED RESTRICTION — TONNAGE

Maximum authorized speed for freight trains is:  
 45 MPH when averaging 90 tons or over per car, or when  
 train exceeds 7000 tons.

##### (C) SPEED RESTRICTIONS — VARIOUS

LOCATION	MPH
RR Crossing, M.P. 0.6 (Approach prepared to stop)	20
RR Crossing, M.P. 62.0	30
RR Crossing, M.P. 63.2 (Stop)	30
RR Crossing, M.P. 73.6	20*
Crossing M.P. 102.7 to 104.0	45
3 Curves, M.P. 111.9 to 112.3	45
4 Curves, M.P. 115.4 to Guthrie	10

\*Speed shown applies only until head end of train is through interlocking limits.

##### (D) SPEED RESTRICTIONS — SWITCHES

Maximum speed permitted through turnout of switches, 10 MPH.

WEST- WARD	STRONG CITY SUBDIVISION			EAST- WARD
Station Numbers	Siding Feet	STATIONS		Mile Post
61150		NEVA <span style="float: right;">Y</span>		
		7.6		
59415		HYMER		7.6
		5.8		
59425		DIAMOND SPRINGS		13.4
		5.8		
59435		BURDICK		19.2
		6.3		
59445		O K T Crossing LOST SPRINGS <span style="float: right;">A</span>		25.5
		5.4		
		S.S.W. Crossing <span style="float: right;">A</span>		30.9
		5.9		
59465	2785	HOPE		36.8
		0.3		
		Mo. Pac. Crossing <span style="float: right;">A</span>		37.1
		7.3		
59475		NAVARRE		44.4
		7.7		
59485		ENTERPRISE		52.1
		0.1		
		O K T Crossing <span style="float: right;">g</span>		52.2
		5.9		
59500		ABILENE <span style="float: right;">BPQTY</span>		58.1
		0.5		
		O K T JCT.		58.6
		0.2		
		S.A. Jct.		58.8
		0.2		
		U.P. Crossing <span style="float: right;">A</span>		59.0
		8.0		
59705		TALMAGE		67.0
		5.8		
59710	1931	MANCHESTER <span style="float: right;">T</span>	TWC	72.8
		5.6		
59765	1874	LONGFORD		78.4
		5.3		
59770		OAK HILL		83.7
		9.3		
59775	2964	MILTONVALE		93.0
		9.1		
59780		AURORA		102.1
		5.9		
59785		HUSCHER		108.0
		2.0		
59790		COOK		110.0
		3.2		
		Mo. Pac. Crossing <span style="float: right;">S</span>		113.2
		0.3		
59800		CONCORDIA <span style="float: right;">Y</span>		113.5
		6.6		
		Mo. Pac. Crossing <span style="float: right;">g</span>		120.1
		7.6		
59820		KACKLEY		127.7
		6.0		
59830		Kyle RR Crossing COURTLAND <span style="float: right;">SY</span>		133.7
		7.5		
59840		LOVEWELL		141.2
		5.8		
59850		WEBBER		147.0
		4.9		
		State Line		151.9
		1.2		
		B.N. JCT.		153.1
		0.7		
59900		SUPERIOR <span style="float: right;">BPY</span>		153.8
		(153.8)		

#### TWC IN EFFECT:

Between Neva and Superior.

At Concordia main track switches at the east and west ends of CLIC tracks 1402 and 1411 will be left lined and locked as last used.

At Superior junction switches normally lined for BN main track.

#### Mile Post location Yard Limits —

Neva — East, M.P. 0.2; West, M.P. 1.3  
 Abilene — East, M.P. 55.5; West, M.P. 62.0  
 Concordia — East, M.P. 112.0; West, M.P. 116.0  
 Courtland — East, M.P. 132.7; West, M.P. 134.7  
 Superior — East, M.P. 150.0; West, M.P. 153.1.

# STRONG CITY SUBDIVISION

## SPECIAL INSTRUCTIONS

### 1. SPEED REGULATIONS

#### (A) MAXIMUM AUTHORIZED SPEED

BETWEEN:	MPH
Neva and Abilene .....	49
Abilene and Courtland .....	30
Courtland and State Line .....	25
State Line and Superior .....	20

#### (B) SPEED RESTRICTION – TONNAGE

Maximum authorized speed for freight trains is:  
45 MPH when averaging 90 tons or over per car, or when train exceeds 7000 tons.

#### (C) SPEED RESTRICTIONS – VARIOUS

LOCATION	MPH
2 Curves, M.P. 4.2 to 4.8	35
7 Curves, M.P. 8.2 to 10.8	40
RR Crossing, M.P. 25.5	49
RR Crossing, M.P. 30.9	49
RR Crossing, M.P. 37.1	49
2 Curves, M.P. 50.7 to 51.5	40
RR Crossing, M.P. 52.2 (Approach prepared to stop)	15
3 Curves, M.P. 51.7 to 53.0	35
2 Curves, M.P. 56.5 to 57.2	30
Crossings, M.P. 58.1 to 59.2	15
RR Crossing, M.P. 59.0	20
2 Curves, M.P. 92.7 to 93.4	20
Crossings, M.P. 112.9 to 114.2	15
RR Crossing, M.P. 113.2 (Stop)	15
RR Crossing, M.P. 120.1 Gate normally across Mo. Pac. track. Approach prepared to stop. If gate is normal, observe maximum speed shown.	30
RR Crossing, M.P. 133.7 (Stop)	30
4 Curves, M.P. 133.8 to 134.0	20
3 Curves, M.P. 152.6 to 153.1	15
Crossings, M.P. 153.0 to 154.0	10

#### (D) SPEED RESTRICTIONS – SWITCHES

Maximum speed permitted through turnout of switches, 10 MPH.

WEST- WARD ↓	STILLWATER SUBDIVISION			↑ EAST- WARD
Station Numbers	Siding Feet	STATIONS		Mile Post
52110		PAWNEE 1.8	Y	6.6
		BN Crossing 9.5	A	8.4
52115		GLENCOE 12.0		17.9
52120	1267	STILLWATER	Y	29.9
		(23.6)		

#### TWC IN EFFECT:

Between Pawnee and Stillwater.

Trains to operate from Pawnee or Camp via BN must secure instructions and track warrant from BN operator via direct dial telephone at Pawnee or Camp. Conductor will designate one member of crew to copy TWC.

Rule 105 in effect on Fairfax Industrial Spur.

Mile Post Location Yard Limits –

Pawnee – East, end of track; West, M.P. 9.0  
Stillwater – East, M.P. 26.0; West, end of track.

#### SPECIAL INSTRUCTIONS

### 1. SPEED REGULATIONS

#### (A) MAXIMUM AUTHORIZED SPEED

BETWEEN:	MPH
Pawnee and Stillwater .....	30
Fairfax Industrial Spur .....	25

#### (C) SPEED RESTRICTIONS – VARIOUS

	MPH
RR Crossing, M.P. 8.4	20
BN RR Crossing, M.P. 58.2 Fairfax Industrial Spur – Automatic Interlocking	20

#### (D) SPEED RESTRICTIONS – SWITCHES

Maximum speed permitted through turnout of switches, 10 MPH.

### 2. TRACKS BETWEEN STATIONS

Name	CLIC No.	Location	Length (Feet)
Swan Rubber .....	5001	M.P. 26.5	2,439
Boomer Spur .....	5004	M.P. 26.7	5,100
Fairfax Industrial Spur .....		M.P. 37.6	20.6
Camp to Fairfax		to 58.2	miles





WEST- WARD		SALINA SUBDIVISION		EAST- WARD	
Station Numbers	Siding Feet	STATIONS		Mile Post	
59500		ABILENE	BPQTY		
		0.4 OK T JCT.			
		0.2 S.A. JCT.			
		0.3 WEST ABILENE			
59550	AT&SF Yard	12.3 SOLOMON	} U.P. Ry.		
		0.4 EAST SALINA			
		1.0 A.B. JCT.		20.5	
		0.1 U.P. Crossing	S	21.5	
		0.1 U.P. Crossing	S	21.6	
59600		0.1 SALINA	BPQY	21.7	
		1.0 U.P. Crossing	A	22.7	
59610	2184	7.4 HEDVILLE		30.1	
59620		12.1 JUNIATA		42.2	
59625		3.3 WESTFALL		45.5	
59630		9.7 BARTON		55.2	
		1.4 U.P. Crossing	G	56.6	
59635	2811	0.3 LINCOLN		56.9	
59640		5.2 GOLDENROD		62.1	
59645		3.1 DENMARK		65.2	
59650		6.5 ASH GROVE		71.7	
59655		5.4 HUNTER		77.1	
59660	981	8.9 TIPTON		86.0	
59665		8.2 CORINTH		94.2	
59670		3.9 FORNEY		98.1	
59675		4.4 OSBORNE		102.5	
		(103.2)			

**TWC IN EFFECT:**

Between Abilene and Osborne.  
Westward trains originating Abilene secure UP & AT&SF track warrants at Abilene.

Eastward trains secure UP & AT&SF track warrants at Salina.  
At West Abilene and East Salina junction switches normally lined for Union Pacific Railroad.

At A.B. Jct. junction switch normally lined for AT&SF.

Mile Post location Yard Limits —

Salina — East, M.P. 20.5; West, M.P. 25.8

Abilene — East, M.P. 55.5, M.P. 62.0 Strong City Subdivision

**SPECIAL INSTRUCTIONS**

**1. SPEED REGULATIONS**

**(A) MAXIMUM AUTHORIZED SPEED**

BETWEEN:	MPH
Salina and Osborne	30

**(C) SPEED RESTRICTIONS — VARIOUS**

LOCATION	MPH
Crossing, M.P. 20.7	10
Crossings, M.P. 21.3 to 22.4	15
RR Crossing, M.P. 21.5 (Stop)	15
RR Crossing, M.P. 21.6 (Stop)	15
RR Crossing, M.P. 22.7	20
Curve, M.P. 24.5 to 24.6	15
Curve, M.P. 25.1 to 25.2	15
2 Curves, M.P. 55.1 to 55.4	15
RR Crossing, M.P. 56.6 (Stop)	15
5 Curves, M.P. 88.7 to 91.5	20
Crossing, M.P. 94.2	5
Bridge, M.P. 101.1 (Solomon River)	20

**SALINA SUBDIVISION**

**(D) SPEED RESTRICTIONS—SWITCHES**

Maximum speed permitted through turnout of switches, 10 MPH.

**2. TRACKS BETWEEN STATIONS**

Name	CLIC No.	Location	Length (Feet)
Solomon—Rueb Track	0401	U.P. M.P. 171.7	4,000

WEST- WARD		McPHERSON SUBDIVISION		EAST- WARD	
Station Numbers	Siding Feet	STATIONS		Mile Post	
59260		MARION	Y		10.1
		0.3 O.K.T. Crossing	A		10.4
59250	2276	4.9 CANADA			15.3
59240		5.2 HILLSBORO			20.5
59230		5.8 LEHIGH			26.3
59220	2054	7.8 CANTON			34.1
59210		5.8 GALVA			39.9
		3.9 S.S.W. Crossing	A		43.8
59200		3.4 McPHERSON	BPQ		47.2
		0.1 U.P. Crossing	S		47.3
58785		6.4 CONWAY			53.7
58780		6.9 WINDOM			60.6
58775		5.6 LITTLE RIVER			66.2
58770		5.8 MITCHELL			72.0
		5.4 MO. PAC. Crossing	G		77.4
58700		0.7 LYONS			78.1
58690		7.9 CHASE			86.0
58680		6.1 SILICA			92.1
58615		6.4 ELLINWOOD	T		98.5
		(88.4)			

**TWC IN EFFECT:**

Between McPherson and Marion.

**RULE 94 IN EFFECT:**

Between M.P. 43.0 (East of McPherson) and Ellinwood.

At McPherson switch from Missouri Pacific connection track 4725 into yard track 4721, as well as west switch of track 4722 into McPherson Subdivision main track, will be left lined and locked as last used.

Mile Post location Yard Limits —

Marion — East, end of track; West, M.P. 12.0.

## McPHERSON SUBDIVISION

### SPECIAL INSTRUCTIONS

#### 1. SPEED REGULATIONS

##### (A) MAXIMUM AUTHORIZED SPEED

BETWEEN:	MPH
Marion and M.P. 43.0	30
M.P. 43.0 and Ellinwood	20

##### (C) SPEED RESTRICTIONS – VARIOUS

LOCATION	MPH
Crossing, M.P. 10.0 to 10.8	15
RR Crossing, M.P. 10.4	20
Crossing, M.P. 33.9	15
RR Crossing, M.P. 43.8	20
Crossings, M.P. 46.5 to 48.0	15
RR Crossing, M.P. 46.7 (Approach prepared to stop)	15
RR Crossing, M.P. 47.3 (Approach prepared to stop)	10
4 Curves M.P. 66.0 to 66.1	15
RR Crossing, M.P. 77.4 (Stop)	15
Crossing, M.P. 77.9	15
RR Crossing, M.P. 78.4 (Approach prepared to stop)	15

##### (D) SPEED RESTRICTIONS—SWITCHES

Maximum speed permitted through turnout of switches, 10 MPH.

WEST- WARD	LITTLE RIVER SUBDIVISION	EAST- WARD
Station Numbers	STATIONS	Mile Post
58700	LYONS	577.1
	12.1	
	MO. PAC. Crossing	589.2
	4.9	
58708	LORRAINE	20.7
	5.6	
58712	HOLYROOD	26.1
	4.6	
58716	FARHMAN	30.7
	5.7	
58720	HITSCHMANN	36.4
	4.8	
58724	BEAVER	41.2
	5.8	
58728	SUSANK	47.0
	2.9	
58732	STICKNEY	49.9
	7.0	
58740	GALATIA <span style="float: right;">T</span>	56.9
	(53.4)	

#### RULE 94 IN EFFECT:

Between: Lyons and Galatia.

### SPECIAL INSTRUCTIONS

#### 1. SPEED REGULATIONS

##### (A) MAXIMUM AUTHORIZED SPEED

BETWEEN	MPH
Lyons and Galatia	20

##### (D) SPEED RESTRICTIONS—SWITCHES

Maximum speed permitted through turnout switches, 10 MPH.

WEST- WARD	GREAT BEND SUBDIVISION	EAST- WARD
Station Numbers	STATIONS	Mile Post
58500	GREAT BEND <span style="float: right;">BPQTY</span>	
	8.3	
58460	HEIZER	8.0
	7.1	
58450	ALBERT	15.1
	9.1	
58440	TIMKEN	24.2
	7.7	
58430	RUSH CENTER	31.9
	6.9	
58420	NEKOMA	38.8
	6.0	
58410	ALEXANDER	44.8
	7.7	
58390	BAZINE	52.5
	11.6	
58380	NESS CITY <span style="float: right;">Y</span>	64.1
	8.4	
58375	LAIRD	72.5
	7.7	
58370	BEEELER	80.2
	6.7	
58365	ALAMOTA	86.9
	9.0	
58360	DIGHTON	95.9
	7.3	
58355	AMY	103.2
	6.3	
58350	GRIGSTON	109.5
	6.3	
58345	TRACTOR	115.8
	3.1	
	MO. PAC. Crossing	118.9
	1.2	
58340	SCOTT CITY <span style="float: right;">Y</span>	120.1
	(120.4)	

#### TWC IN EFFECT:

Between Great Bend and Scott City.

Mile Post location Yard Limits –

Great Bend – East, Great Bend; West, M.P. 1.6

Ness City – East, M.P. 62.6; West, M.P. 65.3

Scott City – East, M.P. 119.0; West, end of track.

### SPECIAL INSTRUCTIONS

#### 1. SPEED REGULATIONS

##### (A) MAXIMUM AUTHORIZED SPEED

BETWEEN:	MPH
Great Bend and M.P. 1.2	15
M.P. 1.2 and Scott City	30

##### (C) SPEED RESTRICTIONS – VARIOUS

LOCATION	MPH
RR Crossing, M.P. 118.9 Interlocking, protected by derails. Stop and follow in- structions posted in box.	15

##### (D) SPEED RESTRICTIONS – SWITCHES

Maximum speed permitted through turnout of switches, 10 MPH.

WEST- WARD ↓	LARNED SUBDIVISION		↑ EAST- WARD
Station Numbers	Siding Feet	STATIONS	Mile Post
58520		LARNED T	
		6.6	
58540		FRIZELL	6.6
		5.6	
58545		SANFORD	12.2
		4.8	
58550		ROZEL	17.0
		6.9	
58555		BURDETT	23.9
		6.8	
58560		GRAY	30.7
		4.7	
58565		HANSTON	35.4
		10.8	
58575		JETMORE T	46.2
		(46.2)	

**RULE 94 IN EFFECT:**  
Between Larned and Jetmore.

**SPECIAL INSTRUCTIONS**

(A) MAXIMUM AUTHORIZED SPEED BETWEEN:	MPH
Larned and Jetmore	20

(C) SPEED RESTRICTIONS – VARIOUS LOCATION	MPH
Crossings, M.P. 23.8 to 23.9	15

(D) SPEED RESTRICTIONS – SWITCHES  
Maximum speed permitted through turnout of switches, 10 MPH.

**2. TRACKS BETWEEN STATIONS**

Name	CLIC No.	Location	Length (Feet)
Bert Wetta Track	1703	M.P. 15.1	351
Bosse Track	4606	M.P. 42.7	508

**ALL SUBDIVISIONS**

**SPECIAL INSTRUCTIONS:**

4. The General Code of Operating Rules, effective October 27, 1985, is supplemented, modified or amended as follows:

**Rule 1 supplemented by adding:** When electric standard clocks are incorrect, they must be set to correct time. Any variation from correct time, up to nine seconds fast or slow, will be indicated by placard on mercury pendulum standard clocks.

**Rule 2 supplemented by adding:** While on duty, employes governed by the General Code of Operating Rules, except those employed in an office where a standard clock is located, must have and use a reliable watch capable of indicating time in hours, minutes and seconds.

**Rule 3 supplemented by adding:** Time may be compared by dialing extension 600, Topeka.

**Rule 15 supplemented by adding:** Radio may be used in lieu of whistle signals to convey information, EXCEPT when using signals 15(a), 15(1) and 15(n).

**Rule 24 amended to read:**

"Trains will be identified as follows:

1. Regular trains - by schedule number and engine number;
2. Extras - by engine number and direction; and,
3. Work Extras - by engine number.

The engine number must be illuminated on engines equipped with number lights. When an engine consists of more than one unit, or when two or more engines are coupled, the number of one unit only will be illuminated and will be the identifying number. When practicable, the number of the leading unit must be used."

**Rule S-71 supplemented by adding:** Eastward regular trains are superior to Westward regular trains of the same class.

**Rule 97(4) amended to read:** Verbal authority from the train dispatcher within APB limits; or to run with current of traffic within TWC limits or where Rule 251 is in effect.

**Rule 99 supplemented by adding:** When necessary to provide protection against following trains, a crew member must go back at least the distance prescribed below:

Where Maximum Authorized Timetable Speed is	Distance
35 MPH or less	1 mile
36 MPH to 49 MPH	1 1/2 miles
50 MPH or over	2 miles

**Rule 102(2) amended to read:** The train involved must not proceed until it is has been determined that it is safe to do so either by visual inspection of train or knowledge that the train brake pipe pressure has been restored by observing caboose gauge, end of train device (ETD) or by making a brake pipe leakage test. Train must not proceed, nor flagman be recalled, until engineer knows that visual inspection is completed or brake pipe pressure has been restored.

**Rule 103(A) supplemented by adding:** When movement is made on an auxiliary track included in the circuit of crossing warning devices, the circuit should be fouled and movement delayed, or stopped if "STOP" sign is displayed for train, until warning devices known to have been operating for 20 seconds.

**Rule 104(M) first paragraph amended to read:** Spring switches are identified by letters "S" or "SS", special targets, signs and/or lights. Facing point movements over spring switches will be protected by signals or indicators where required. Spring switch must not be trailed through unless switch is in normal position, or has been lined for the movement.

**Rule 104(Q) new rule added to read:** VARIABLE SWITCHES: Trailing movement may be made over switch from either track regardless of position of switch points.

When making a trailing movement and switch points are not lined for such movement, all wheels of a car or unit must clear switch points before reverse movement is commenced.

During snow storms, ice storms or other conditions that may prevent a variable switch from functioning properly, a trailing movement must not be made through variable switch until it has been lined by hand for the movement.

**Rule 104(R) new rule added to read:** SWITCH POINT INDICATOR:

Aspect                      Indication

Green	Switch points fit properly for normal movement.
Yellow	Switch points fit properly for reverse movement.
Red or Dark	Stop and inspect switch.



# ALL SUBDIVISIONS

**Rule 153 supplemented by adding:** Where two or more main tracks are in service, they will be designated as follows:

1. If two tracks, the track to the right as viewed from a Westward or Southward train is the North track, and the track to the left is the South track.
2. If three tracks, the farthest track to the right as viewed from a Westward or Southward train is the North track, the farthest track to the left is the South track and the track between the North and South tracks is the Middle track.
3. If four or more tracks, the farthest track to the left as viewed from a Westward or Southward train is No. 1 track and the tracks to the right thereof are No. 2, No. 3, No. 4, etc., respectively.

**Rules 230 through 242 modified as shown on pages 50 and 51.**

**Rule 317(2) does not apply.**

**Rule 404 first paragraph amended to read:** In track warrants and track bulletins, regular trains will be designated by number, as No. 10 adding engine number when necessary; extras by engine number and direction.

**Rule 405 Supplemented by adding:** Prescribed form for track warrant is shown on page 168. Pre-printed pads of this form will be in the same format as shown. The form for mechanical transmission is revised as depicted below, with items (5) and (14) omitted intentionally.

Mechanically transmitted track warrants must indicate total number of track bulletins (item 16), track condition messages (item 18) and items checked (item 19). In items 16 and 18, if none show "No". Employees receiving copies must assure that the correct number of track bulletins and track condition messages are received, and that "items marked" correspond with those indicated in item 19.

TRACK WARRANT

NO. - \_\_\_\_\_ 19

TO \_\_\_\_\_ AT \_\_\_\_\_

1. TRACK WARRANT NO. \_\_\_\_\_ IS VOID.

2. PROCEED FROM \_\_\_\_\_ ON \_\_\_\_\_ TRACK

TO \_\_\_\_\_

3. PROCEED FROM \_\_\_\_\_ ON \_\_\_\_\_ TRACK

TO \_\_\_\_\_

4. WORK BETWEEN \_\_\_\_\_ ON \_\_\_\_\_ TRACK

AND \_\_\_\_\_

6. THIS AUTHORITY EXPIRES AT \_\_\_\_\_ M.

7. NOT IN EFFECT UNTIL AFTER ARRIVAL OF \_\_\_\_\_ AT \_\_\_\_\_

8. HOLD MAIN TRACK AT LAST NAMED POINT.

9. DO NOT FOUL LIMITS AHEAD OF \_\_\_\_\_

10. CLEAR MAIN TRACK AT LAST NAMED POINT.

11. BETWEEN \_\_\_\_\_ AND \_\_\_\_\_ MAKE ALL MOVEMENTS AT RESTRICTED SPEED. LIMITS OCCUPIED BY TRAIN OR ENGINE.

12. BETWEEN \_\_\_\_\_ AND \_\_\_\_\_ MAKE ALL MOVEMENTS AT RESTRICTED SPEED AND STOP SHORT OF MEN OR MACHINES FOULING TRACK.

13. DO NOT EXCEED \_\_\_\_\_ MPH BETWEEN \_\_\_\_\_ AND \_\_\_\_\_

15. PROTECTION AS PRESCRIBED BY RULE 99 NOT REQUIRED.

16. TRACK BULLETINS IN EFFECT \_\_\_\_\_

17. OTHER SPECIFIC INSTRUCTIONS \_\_\_\_\_

18. TRACK CONDITION MESSAGES IN EFFECT \_\_\_\_\_

19. ITEMS CHECKED \_\_\_\_\_

OK \_\_\_\_\_ M DISPATCHER \_\_\_\_\_

**Rule 450 second paragraph amended to read:** Where track bulletins are authorized, those received by a train or engine at their initial station must be listed on a track warrant or clearance, as appropriate, unless otherwise instructed by the train dispatcher or special instructions. The conductor and engineer must have copies of all track bulletins listed.

# ALL SUBDIVISIONS

**Rule 450 is also supplemented by adding:** Prescribed form for track bulletins, Forms A and B, are shown on pages 174 and 175. Pre-printed pads of these forms will be, and the forms for mechanical transmission are, revised as depicted below.

Mechanically transmitted track bulletins must indicate, in space provided, the total number of lines used. Employees receiving copies must assure that the lines used corresponds with number indicated.

**Rule 450.** In addition to Track Bulletin Forms A and B, amended, Track Bulletin Form C has been devised for mechanical transmission only to permit handling of additional "conditions" when space in Item 11 of Track Bulletin Form A is insufficient.

Total lines used will indicate number of lines filled in.

TRACK BULLETIN FORM A

NO. \_\_\_\_\_ ON \_\_\_\_\_ SUBDIV. \_\_\_\_\_ 19

TO \_\_\_\_\_ AT \_\_\_\_\_

BETWEEN POINTS SHOWN IN LINES 1 THROUGH 10 BELOW DO NOT EXCEED SPEED GIVEN! USE LAST COLUMN WHEN FLAGS DISPLAYED LESS THAN DISTANCE PRESCRIBED BY RULE 10.

LINE	LINE NO.	LIMITS	SPEED	TRACK(S)	FLAGS AT M. P.
VOID	NO.	MP TO MP	MPH		
1	1				
2	2				
3	3				
4	4				
5	5				
6	6				
7	7				
8	8				
9	9				
10	10				
11	OTHER CONDITIONS:				

TOTAL LINES USED \_\_\_\_\_

OK \_\_\_\_\_ M COPIED BY \_\_\_\_\_ DISPATCHER \_\_\_\_\_

RELAYED TO \_\_\_\_\_

TRACK BULLETIN FORM B

NO. \_\_\_\_\_ ON \_\_\_\_\_ SUBDIV. \_\_\_\_\_ 19

TO \_\_\_\_\_ AT \_\_\_\_\_

ON \_\_\_\_\_ (DATE) \_\_\_\_\_ BE GOVERNED BY RULE 455 WITHIN FOLLOWING LIMITS:

USE COLUMN WITH ASTERISK (\*) WHEN FLAGS DISPLAYED LESS THAN DISTANCE PRESCRIBED BY RULE 10.

LINE	LINE NO.	LIMITS	FROM	UNTIL	TRACK(S)	FOREMAN AND GANG NO.	STOP
VOID	NO.	MP TO MP	MPH	MPH			
1	1						
2	2						
3	3						
4	4						
5	5						
6	6						
7	7						
8	8						
9	9						
10	10						

TOTAL LINES USED \_\_\_\_\_

OK \_\_\_\_\_ M COPIED BY \_\_\_\_\_ DISPATCHER \_\_\_\_\_

RELAYED TO \_\_\_\_\_

## ALL SUBDIVISIONS

**Rule 607 supplemented by adding:** Any act of hostility, misconduct or willful disregard or negligence affecting the interests of the Company is sufficient cause for dismissal and must be reported.

Indifference to duty, or to the performance of duty, will not be condoned.

Courteous deportment is required of all employees in their dealings with the public, their subordinates and each other.

Boisterous, profane or vulgar language is forbidden.

**Rule 623 amended to read:** Employees whose duties are in any way affected by them, must have and comply with Air Brake Rules 901 through 925. Engineers, firemen and hostlers must have and comply with Air Brake and Train Handling Rules, Form 2501 Standard.

### 5. (A) SPEED – AUXILIARY TRACKS

Trains and engines using auxiliary tracks must not exceed turn-out speed for that track, unless indicated otherwise in Special Instructions 1(A).

### (B) SPEED – STREET CROSSINGS

Speed restriction over street or highway crossings listed in Special Instructions 1(C) apply only while head end of train is passing over such crossing.

### 6. MAXIMUM SPEED OF ENGINES.

Engines	Forward or dead in train (MPH)	When not controlled from leading Unit (MPH)
AMTRAK 100-799 5990-5998	90*	45
1215-1245#, 1453#, 1460# Slug Units 120-121	45	45
All Other Classes	70	45

Forward speed applies when lead unit of train is controlling and is in backing position. EXCEPTION: When such unit is car body type, maximum authorized speed 45 MPH.

\*Engine without cars must not exceed 70 MPH.

#When used as controlling unit, maximum authorized speed is 20 MPH.

### 7. MAXIMUM DEPTH OF WATER THROUGH WHICH ENGINES MAY BE OPERATED AND MAXIMUM SPEED IN SUCH OPERATION.

	Maximum Depth Above Top of Rail (Inches)	Maximum Speed (MPH)
All Classes except Amtrak	3	5
Amtrak	2	2

## ALL SUBDIVISIONS

### 8. DERRICKS, CRANES, SCALE TEST CARS.

Derricks, cranes, pile drivers, spreaders, and similar machinery moving on their own running gear must not be moved in trains except on authority of Trainmaster, and trains or engines handling such equipment must not exceed speed indicated below:

Subdivision	Wrecking Derricks MPH	Pile Drivers AT 199454 AT 199455 AT 199457 AT 199458 AT 199459 AT 199460 AT 199461 AT 199462 AT 199463 AT 199464 AT 199465 and Jordan Spreaders MPH	Locomotive Cranes AT 199600 AT 199720 and Other machines	Pile Driver AT 199453 MPH
First, Second, Third, Fourth, Oklahoma and Douglass Fifth (Hutchinson to Great Bend) Enid (Enid to Guthrie) Strong City (Neva to Abilene)	40	45		30
Fifth (Great Bend to Kinsley) Enid (Kiowa to Enid) Strong City (Abilene to Superior) McPherson, Salina, Great Bend, Larned, and Stillwater Fairfax Industrial Spur	20	20		20
Little River	15	15		15

Trains or engines handling wrecking derricks, cranes, pile drivers, Jordan spreaders, and similar machinery moving on their own running gear, through a turnout must not exceed one-half the maximum authorized speed for that turnout.

Locomotive Cranes AT 199600 and 199720 and pile drivers must be handled in trains next to engine.

All foreign line scale test cars must be handled in trains immediately ahead of caboose at speed not exceeding 50 MPH.

Pile driver AT 199460 must not exceed 5 MPH on yard tracks, sidings and through turnouts.

### 9. TRACKSIDE WARNING DEVICES

#### (A) HOTBOX AND DRAGGING EQUIPMENT DETECTORS

Abnormal heat from hot wheels (sticking brakes), overheated journals, traction motors or suspension bearings will actuate trackside indicators. Dragging equipment and wide or shifted loads will also actuate track-side indicators at locations so equipped.

*Locator (Readout) type:*

When actuated by a condition on a train, a rotating white light will illuminate at detector and locator locations. Train must immediately reduce speed to not exceeding 20 MPH and stop must be made with head-end at locator, if possible; readout observed and instructions in the locator cabinet complied with. Counters will indicate accumulated axle count between defective axle and rear of train.

If counters fail to show location of defective equipment, or if rear car of train is indicated as location of defective equipment and no defect(s) found on that car, the entire train must be thoroughly inspected for hot journals, wheels, bearings or dragging equipment.

When rotating white light is illuminated before train reaches the detector, stop must be made and locator observed unless otherwise instructed by train dispatcher. If any lamps in locator cabinet are lighted, or an axle count is indicated on register, be governed by above instructions. If no lamps are lighted, or counters have not registered, train may proceed at prescribed speed and must be observed closely enroute.

## ALL SUBDIVISIONS

### 9. TRACKSIDE WARNING DEVICES—CONTINUED

#### Radio Readout (Reporter) type:

As train approaches the detector location, to alert crew that system is operational the following message may be transmitted via radio:

"SANTA FE RAILROAD, (Site Identification), SYSTEM WORKING."

As train passes the detector location, if defect(s) in the train are noted a rotating white light will be illuminated. In addition, a message stating "YOU HAVE A DEFECT" or an audible beeping tone will be transmitted via radio. If detector is on the North track, the audible tone will be a fast beep; if on Middle or South track, it will be a slow beep. If two trains are passing detector at same time and defect(s) are noted in *each* train, the beeping tone will revert to a continuous tone. When any of these warnings are observed, train(s) must be stopped with rear-end at least 300 feet beyond the detector then identification of defect(s) noted, by type and location in the train, will be transmitted via radio. This transmission will be repeated once to insure information is correctly copied. All references to defect location will be from head end of train, and references to "LEFT" or "RIGHT" side are to the engineer's left or right in the direction of travel. The following are typical of transmissions that crews can expect to hear:

- (1) "SANTA FE RAILROAD, (Site Identification), FIRST HOTBOX RIGHT SIDE, One seven eight."
- (2) ".....SECOND HOTBOX LEFT SIDE, one four three."
- (3) ".....FIRST DEFECTIVE CAR\*, axle one two five."
- (4) ".....FIRST DRAGGING EQUIPMENT NEAR AXLE zero six eight."
- (5) ".....WIDE LOAD NEAR AXLE two ninety six."

\*DEFECTIVE CAR alarm indicates there are more than two defects on a particular car. When such alarm(s) received, close inspection must be made of all journals and wheels on car indicated and 3 cars (or units) on either side of indicated equipment.

Anytime a train receives four (4) defective car alarms, three (3) or more hotbox alarms, two (2) or more dragging equipment alarms, or one (1) wide load alarm, crew must inspect the remainder of their train for additional defects.

If, after head-end of train passes detector, the rotating white light becomes illuminated but no message or audible tone is received, train must be stopped with rear-end at least 300 feet beyond the detector and entire train inspected for defects.

If the rotating white light is illuminated *before* head-end of train reaches detector, AND/OR the following message is transmitted via radio: 'SANTA FE RAILROAD, (Site Identification), SYSTEM FAILURE,' crew must be alert for the possible transmission of a message or audible tone should an alarm occur during passage of the train. If no such message or tone is received, train may proceed at prescribed speed and must be observed closely enroute.

If, after entire train has passed the detector, no defects were noted the following message will be transmitted via radio:

"SANTA FE RAILROAD, (Site Identification), NO DEFECTS."

If, as train approaches and passes detector, the rotating white light does not illuminate, and no message or audible tone is received, train may proceed at prescribed speed and must be observed closely enroute.

#### Instructions Applicable to All Types:

To locate defect indicated by a hotbox detector, crew must actually count axles. When making inspection, give particular attention to heat of journals and hub wheels. If the bare hand cannot be held on a roller bearing housing for a few seconds, the bearing should be considered overheated. WARNING: CAUTION AND GOOD JUDGEMENT SHOULD BE EXERCISED AS DEFECTIVE COMPONENTS CAN BECOME EXTREMELY HOT AND COULD CAUSE PERSONAL INJURY. Observe for smoke, sluffing or melting or bearing surface, or metallic cuttings in the journal box of a friction type bearing.

After each inspection, use yellow crayon marker to write the date and letter "B" above a roller bearing journal; the date and letter "J" above a friction bearing journal; or, the date and letter "W" on a wheel.

If an overheated condition is found, the car or unit must be set out. If heat caused by sticking brakes and condition is not found, make close inspection of three cars or units on either side of such indicated equipment; then, if nothing found wrong (or entire train has been inspected) the train may proceed at prescribed speed but must stop after 30 miles for an identical inspection unless train was checked by an intervening detector or is delivered to a terminal where mechanical inspection is made.

## ALL SUBDIVISIONS

### 9. TRACKSIDE WARNING DEVICES — CONTINUED

Mechanical forces at the terminal, and relieving crew at crew change points where mechanical inspection is not made, must be informed of existing conditions.

If abnormal heat is detected on same car by intervening detector, or during a stop for inspection, car must then be set out.

Any detector failure or malfunction observed must be reported to the train dispatcher as promptly as practicable.

Train dispatchers must not instruct trains to disregard detector indications, and proceed without stopping for required inspection, unless they have been informed by a signalman that the detector is actually inoperative.

When a train is stopped by detector, information required by Revised Form 1571 Standard must be transmitted verbally to train dispatcher's office.

Trains must not exceed 30 MPH while moving over hotbox detectors (scanners) when:

- (a) it is snowing or sleeting; or,
- (b) there is snow on ground which can be agitated by a moving train.

### 10. JOINT TRACK FACILITIES

HUTCHINSON—AT&SF trains and engines will use S.S.W. main track between Hutchinson and M.P. 0.6, H&S Subdivision, Plains Division.

WICHITA—AT&SF trains will use Wichita Union Terminal Ry. Co. tracks between North Jct. and South Jct.

ARKANSAS CITY—MULVANE—BELLE PLAINE—Mo. Pac. trains will use AT&SF tracks between Arkansas City and Belle Plaine via Mulvane.

YA JCT.—ST JCT.—Mo. Pac. trains will use AT&SF trains between YA Jct. and ST Jct.

NEWTON—McPHERSON, AND LYONS—AT&SF trains will use Mo. Pac tracks between Newton and McPherson, (29.4 miles) and at Lyons.

O K T JCT.—WEST ABILENE—O K T trains will use AT&SF main track.

WEST ABILENE—EAST SALINA—AT&SF trains will use U.P. R.R. tracks between West Abilene and East Salina (19.9 miles).

COURTLAND—AT&SF trains and engines will use Kyle R.R. main track and siding and will be governed by Rules 93 and 105.

EAST SALINA—A.B. Jct.—O K T and AT&SF trains will use O K T main track.

SUPERIOR—ENID—AT&SF trains and engines will use B.N. main track and will be governed by Rule 93.

BLANTON—ENID—AT&SF trains will use B.N. tracks between Blanton and Enid.

BLACKBEAR—PAWNEE—CAMP—AT&SF trains will use B.N. tracks between Black Bear and Camp, (31.1 miles) via Pawnee.

PAWNEE—AT&SF main track between M.P. 7.3 and M.P. 8.2 is designated a siding for B.N. trains. AT&SF Time Table and Special Instructions will govern.

SHAWNEE—HARTER—AT&SF trains will use M-K-T tracks between Shawnee and Harter (36.7 miles).

### 11. USE OF UNION PACIFIC TRACKS.

GENERAL CODE Rule 10. TEMPORARY RESTRICTIONS:

EXCEPTION: Roadway sign for protection of men and machines, on the Union Pacific Railroad only, will be a yellow-red reflectorized sign.

GENERAL CODE Rule 11. UNATTENDED FUSEE:

EXCEPTION: On Union Pacific stop must be made before any portion of train or engine passes fusee.

GENERAL CODE Rule 99. FLAGGING RULE:

When flag protection against following trains is required, flagman must go back 2 miles.

GENERAL CODE signal Rules 245-A through 245-H apply in all territories of the Union Pacific Railroad Co. Under this system, stop signals are designated by the absence of number plates and may also be marked by a plate bearing the letter "a".

	Aspect	Name	Indication
245-D	Yellow	Approach	Proceed prepared to stop before any part of train or engine passes the next signal. Trains exceeding 30 MPH must immediately reduce to that speed.
245-F	Flashing Yellow	Approach Limited	Proceed. Speed passing next signal must not exceed 40 MPH.

GENERAL CODE Rule 314. MOVEMENT FROM SIGNAL REQUIRING RESTRICTED SPEED:

EXCEPTION: Trains must move at Restricted Speed until rear end passes signal.



## ALL SUBDIVISIONS

### 12. USE OF ST. LOUIS SOUTHWESTERN TRACK.

Before lining switch to enter St. Louis Southwestern Main track at Hutchinson, crew must obtain permission from SSW train dispatcher. Use phones located near switches. After permission obtained, crew must open switch and wait five minutes then proceed at restricted speed to next governing signal.

### 13. MAXIMUM AUTHORIZED SPEED FOR VARIOUS CARS. MPH

(A) Trains handling continuous welded or jointed rail, excluding twin loads of 78-foot rail . . . . .	40*
* Except 25 MPH on curves of 6 degrees or more	
(B) UTLX tank cars numbered: UTLX 75933 thru 75936 UTLX 75939 UTLX 76250 thru 76275 UTLX 76500 thru 76751 (except 76548 and 76729) UTLX 78256 thru 78293 UTLX 78313 UTLX 78326 thru 78353	40
(C) DVLX tank cars numbered: DVLX 4001-4189	40
(D) ATSF tank and work equipment numbered: ATSF 96606 thru 96892 ATSF 99148 thru 99297 ATSF 99308 thru 99493 ATSF 99700 thru 100298 ATSF 100301 thru 101099 ATSF 189000 thru 189999 ATSF 192770 thru 192875 ATSF 199880 thru 199899 ATSF 202750 thru 202999 ATSF 209000 thru 209999	45
(E) ACFX tank cars numbered: ACFX 17451 thru 17495	45
(F) NATX tank cars numbered: NATX 10841 thru 10865	45
(G) PC or CR gondola cars numbered: PC 598500 thru 598999 CR 598500 thru 598999	45
(H) SP gondola (ore) cars numbered: SP 345000 thru 345699	45
(I) Empty "Schnabel" type cars numbered: APWX 1004 GEX 40010, 80002, 80003 BBCX 1000 GPUX 100 CEBX 1000 HEPX 200 CEBX 100, 101 KWUX 10 CPOX 820 WECX 101, 102, 200-203, 301 CWEX 1016  All cars listed in (I) must be handled on or near the rear end of trains not exceeding 100 cars in length; must not be handled in trains requiring pusher service and must not be humped or switched with motive power detached.	40
(J) Trains handling loaded "Schnabel" type cars listed in (I), also CEBX 800 loaded or empty, must be governed by Special Instructions issued for individual movements.	
(K) Trains handling DOUBLE-STACK container cars.	55

14. Rule 450. Track bulletins authorized on all subdivisions of Middle Division.

15. Rule 405. Track bulletins and track warrants may be transmitted mechanically on Middle Division.

16. Rule 82(A). Clearance not required on Middle Division.

## ALL SUBDIVISIONS

### HAZARDOUS MATERIAL

IN CASE OF ACCIDENT, your safety is the first consideration. If you suspect hazardous material may be involved in a derailment, do the following IF IT IS SAFE TO DO SO:

- A. DETERMINE STATUS OF ALL CREW MEMBERS.
- B. RESCUE INJURED, remove them to a safe area, and call for assistance.
- C. IF FIRE OR VAPOR CLOUDS are visible, evacuate to 1/2 mile upwind of vapor cloud or fire. Before evacuating take all paperwork such as waybills, consist and emergency response information with you.
- D. NOTIFY the Chief Dispatcher by the quickest means possible. If Railroad communications fail or is not available, call long distance collect — (316) 283-7510. Tell him:
  - (1) Your name and title.
  - (2) Train identification symbol.
  - (3) Specific location of the incident (station, milepost location, nearest street or highway crossing).
  - (4) If you need fire or medical response.
- E. IF NO FIRE OR VAPOR CLOUDS are apparent,
  - (1) EXTINGUISH smoking materials and caboose stove. Do not smoke in the vicinity of a hazardous material incident. Do not ignite fuses.
  - (2) CHECK the train consist and shipping papers to determine what cars and commodities may be involved and where they are located on the train.
  - (3) INSPECT the train to determine the condition of cars involved. Use a buddy system if possible. Tell crew members what products may be involved and what risk they may pose. Approach from upwind (wind at your back) or uphill side. Go no nearer than absolutely necessary to assess the condition of the cars. Use your eyes, ears and nose to detect any fire, vapor or gas clouds, smoke, leak or unusual smells or noises. If you detect these conditions, DO NOT GO NEAR THE CARS, evacuate all crew members to a safe distance.
- F. PROVIDE the Chief Dispatcher with as much of the following information as possible after you have inspected the train.
  - (1) Initial and number of cars involved.
  - (2) Location of hazardous material in derailment.
  - (3) Description of hazardous materials from shipping papers.
  - (4) Condition of each car. Upright or turned over, intact; punctured or leaking; on fire or near fire; producing a vapor or gas cloud; unusual odor or unusual noise.
  - (5) Location of people, property, or public systems (roads, power lines, hospitals, etc.) which could be subject to damage.
  - (6) Location of nearby stream, river, pond, lake or other body of water.
  - (7) Location of access roads.
  - (8) Any other information that will help the dispatcher understand the situation.
- G. WARN people to stay away from the emergency area.
- H. IDENTIFY yourselves to responding police or fire personnel. GIVE them your train consist and hazardous materials emergency response printout. HELP them determine which cars and products are derailed or damaged. The conductor may provide waybill data, but should retain the waybills for delivery to a responding operating officer.
- I. REMAIN at the scene at a safe distance until relieved by a railroad Operating Officer.

# Position in train of placarded cars containing hazardous materials

**NOTE:** Cars with same placards may be placed next to each other.

Shippers may use either words or numbers on placards. Numbers shown are samples. Other numbers may appear on placards.

## HOW TO USE THIS CHART:

To determine where a placarded car can be placed in a train follow these steps:

- Determine the type of placard applied to the car.
- Determine the type of car.
- Follow vertically down the chart and note which lines apply.
- The symbol X indicates the wording at the side that applies.

See footnotes for explanation.

Loaded cars placarded:



Loaded cars placarded:



Loaded cars placarded:



Loaded tank cars placarded:



Empty tank cars placarded:



Loaded cars other than tank cars placarded:



Loaded cars placarded:



## RESTRICTIONS

Must not be nearer than the sixth car from the engine, occupied caboose or passenger car. If total number of cars in train does not permit, must be placed as near the middle of train as possible but not nearer than the second car from the engine, occupied caboose or passenger car.

MUST NOT BE NEXT TO:	Loaded cars placarded: POISON GAS	Loaded cars placarded: EXPLOSIVES A	Loaded cars placarded: RADIOACTIVE	Loaded tank cars placarded: POISON 1824	Empty tank cars placarded: POISON 1824	Loaded cars other than tank cars placarded: DANGEROUS	NO RESTRICTIONS
	X	X		X	X		
Engine, occupied caboose or passenger car	X	X		X	X		
Car occupied by guard or escort	X (1)	X (1)		X (1)	X (1)		
Loaded plain flat car	X	X		X	X		
Loaded bulkhead flat car	X (2)	X (2)		X (2)	X (2)		
Loaded TOFC/COFC flat car	X	X (3)		X (4)	X (4)		
Fiat Car loaded with vehicles	X	X		X (5)	X (5)		
Open top car with shiftable load	X (2)	X (2)		X (2)	X (2)		
Car with internal combustion engine in operation. Car with any heating apparatus or any lighted stove, heater or lantern	X	X		X	X		
Car placarded EXPLOSIVES A	X		X	X	X	X	
Car placarded POISON GAS		X	X	X	X	X	
Car placarded RADIOACTIVE	X	X		X	X	X	
Any loaded placarded car (other than COMBUSTIBLE or same placard)	X	X	X				

(1) A placarded rail car must be next to and ahead of any car occupied by the guards or technical escorts accompanying this car. However, if a car occupied by guards or technical escorts is equipped with a lighted heater or stove, it must be the fourth car behind any car placarded EXPLOSIVES A.

(2) Restriction applies only when any of the lading protrudes beyond the car ends or when any of the lading extending above the car ends is liable to shift so as to protrude beyond the car ends.

(3) Cars placarded EXPLOSIVES A may be placed next to each other.

(4) Restriction applies only to loaded flatbed or open top trucks and trailers and to loaded trucks and trailers without securely closed doors.

(5) Restriction does NOT apply to a car loaded with vehicles secured by a device designed for that purpose and permanently installed on the car and of a type generally accepted for handling in interchange between railroads.



# SWITCHING RESTRICTIONS

THE FOLLOWING CARS MUST NOT BE:  
 CUT OFF IN MOTION, NOR BE  
 IMPACTED BY CARS ROLLING UNDER  
 THEIR OWN MOMENTUM

ANY CAR PLACARDED

EXPLOSIVES A

OR

POISON GAS



OR

A TOFC OR COFC VEHICLE  
 DISPLAYING ANY PLACARD

OR

DOT CLASS 113  
 TANK CAR LOAD OF FLAMMABLE GAS

USE THE NUMBERED  
 PLACARDS TO DISTINGUISH TANK  
 CARS PLACARDED FLAMMABLE GAS  
 FROM FLAMMABLE FROM COMBUSTIBLE




NUMBER 2  
 FLAMMABLE GAS




NUMBER 3  
 FLAMMABLE LIQUID

USE BOTTOM WHITE TRIANGLE  
 TO IDENTIFY COMBUSTIBLE PLACARDS  
 NO SWITCHING RESTRICTIONS APPLY

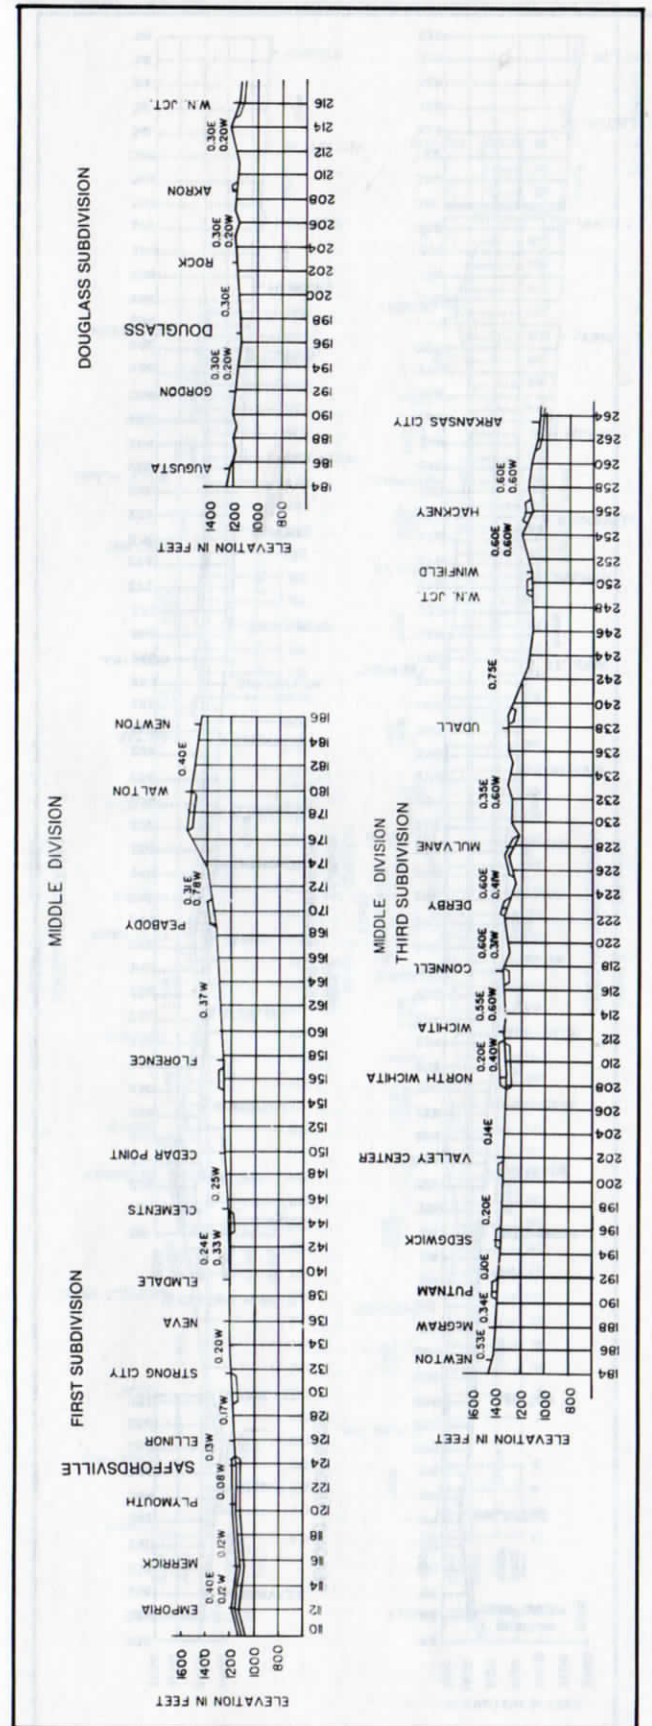












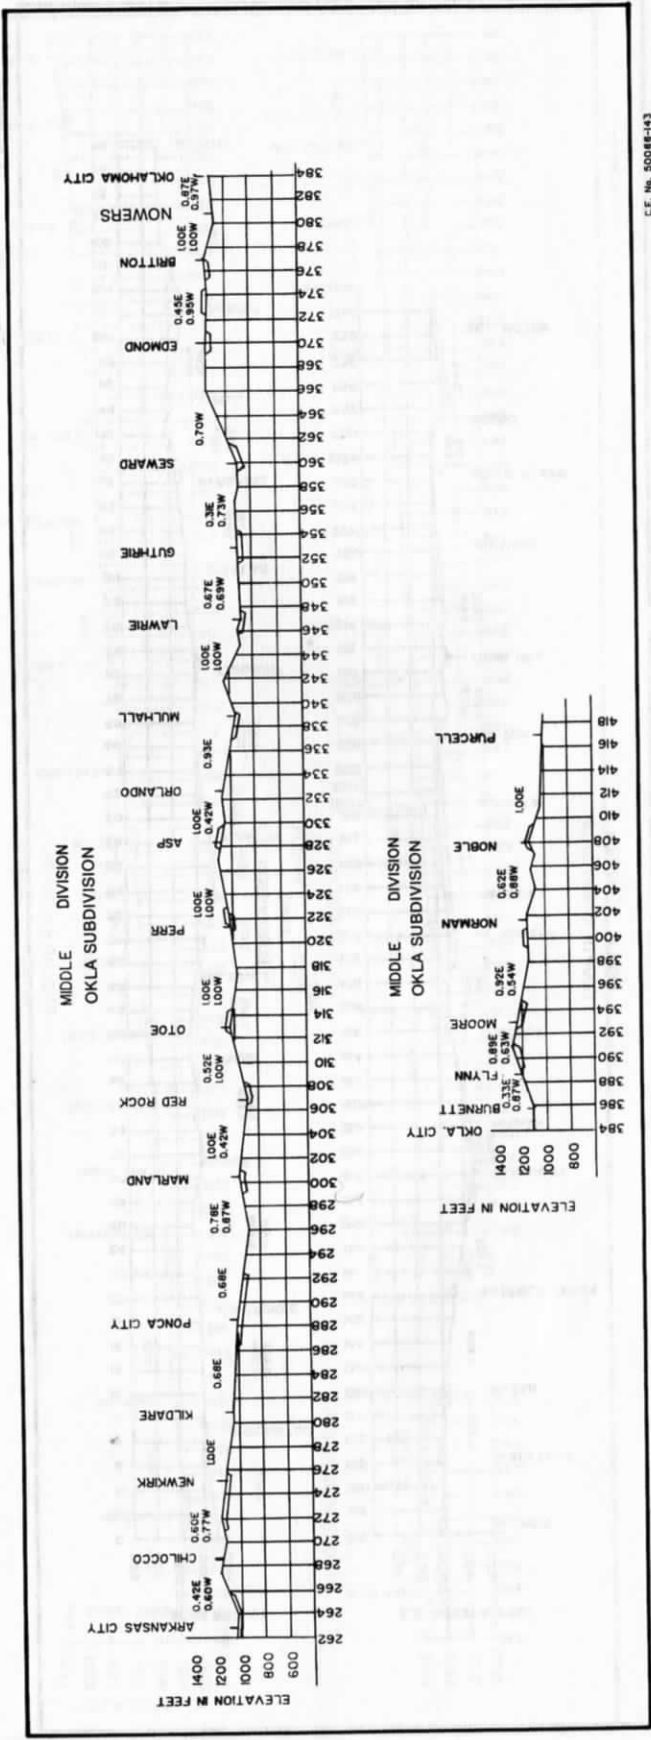

CE. No. 50088-143

Page left blank intentionally.

**ASPECTS OF  
COLOR LIGHT  
AND SEMAPHORE SIGNALS**



RULE	NAME	INDICATION
230	CLEAR	Proceed
231	APPROACH LIMITED	Proceed prepared to pass next signal not exceeding 60 MPH and to advance on diverging route.
232	ADVANCE APPROACH	Proceed prepared to pass next signal not exceeding 50 MPH and to advance on diverging route.
233		
234	APPROACH MEDIUM	Proceed; approach next signal not exceeding 40 MPH and be prepared to enter diverging route at prescribed speed.
235	APPROACH RESTRICTING	Proceed prepared to pass next signal at restricted speed.
236	APPROACH	Proceed prepared to stop at next signal, trains exceeding 40 MPH immediately reduce to that speed.
237	DIVERGING CLEAR	Proceed on diverging route not exceeding prescribed speed through turnout.
238	DIVERGING APPROACH	Proceed through diverging route; prescribed speed through turnout; approach next signal preparing to stop, if exceeding 40 MPH immediately reduce to that speed.
239		
240	RESTRICTING	Proceed at restricted speed.
241	STOP AND PROCEED	Stop, then proceed at restricted speed.
242	STOP	Stop