



SANTA FE SAFETY FIRST



Every employe should promptly report any unsafe condition or practice to his foreman or other proper company officer.

TRAINMASTERS

R. H. De HAVEN Fort Worth, Texas
D. L. REYNOLDS Brownwood, Texas
R. P. BENSON Fort Worth, Texas

ROAD FOREMAN OF ENGINES—TRAINMASTER (AMTRAK OPERATIONS)

D. L. WHITE Fort Worth, Texas

ASSISTANT TRAINMASTERS

B. F. ROGERS Fort Worth, Texas
J. L. GOERING Fort Worth, Texas
W. J. CUMMINGS Dallas, Texas
C. F. COX Dallas, Texas
C. R. SAUNDERS Cleburne, Texas
M. L. ELKINS Sweetwater, Texas

DIVISION RULES EXAMINER

O. D. HAMILTON Fort Worth, Texas

SUPERVISOR OF AIR BRAKES— GENERAL ROAD FOREMAN OF ENGINES

E. E. REYNOLDS Amarillo, Texas

ROAD FOREMEN OF ENGINES

F. J. SMITH Fort Worth, Texas
P. R. PIERCE Brownwood, Texas

SAFETY SUPERVISOR

K. W. ROSS Fort Worth, Texas

CHIEF DISPATCHER

D. B. ASHLEY Fort Worth, Texas

ASSISTANT CHIEF DISPATCHERS

A. W. LATHAM Fort Worth, Texas
C. P. PIERCE, JR. Fort Worth, Texas
O. A. LEWIS Fort Worth, Texas
J. C. RUSSELL Fort Worth, Texas

DISPATCHERS — FORT WORTH, TEX.

R. A. SCHILLING	F. W. ULLMAN
J. D. BLANKENSHIP	R. T. SHAVER
D. E. MURDOCK	E. S. FIELDS
A. G. COPPINGER	J. E. WEAVER
J. L. THOMAS	J. G. WILLIAMS

AVOID DAMAGE—SWITCH CUSTOMERS' CARS
CAREFULLY

OVERSPEED COUPLINGS ARE DAMAGING

Damage to freight or car can be avoided by always keeping coupling speed within the safe range—NOT OVER 4 MILES PER HOUR—A BRISK WALK. Rule 112(C).

HANDLE FREIGHT CAREFULLY AND KEEP OUR
CUSTOMERS

IT'S EVERYBODY'S JOB ON THE SANTA FE

The Atchison, Topeka and Santa Fe Railway Company

WESTERN LINES

NORTHERN DIVISION

TIME TABLE No.

7

IN EFFECT

WEDNESDAY, JUNE 15, 1977

At 12:01 A. M.

Central Standard Time

This Time Table is for the exclusive use and guidance of employes.

J. R. FITZGERALD,
General Manager,
Amarillo, Texas.

F. A. BEAUCHAMP,
Asst. General Manager,
Amarillo, Texas.

J. W. TIEHEN,
Superintendent,
Fort Worth, Texas.

WESTWARD			TIME TABLE No. 7 June 15, 1977	EASTWARD			
First Class	Capacity of Siding in Feet	Rolling Grade Ascending		Rolling Grade Ascending	Mile Post	Communications Turn Tables and Wyes	First Class
15							16
Leave Daily AM		Feet Per Mile	STATIONS	Feet Per Mile			Arrive Daily PM
9.36			PURCELL		517.5	CR	5.13
	8250	.0	7.3	5.3	510.2	B	
	8250	42.2	WAYNE	52.8	502.6		
		2.1	7.6	19.0			
10.00	10800		PAOLI			Y	
			7.0		495.6	CR	4.48
	8750	18.4	PAULS VALLEY	26.4	488.1	CR	
	9500	42.2	7.5	3.1	478.0	C	
		31.6	WYNNEWOOD	32.7		Y	
	8850		10.1	52.8	469.6	CR	
	8550	52.8	DAVIS	52.8	460.3		
		52.8	8.4	52.8		Y	
10.53	6000		DOUGHERTY		450.4	CR	3.55
	6500	52.8	9.3	52.8			
			GENE AUTRY		443.0		
	9950	52.8	9.9	52.8	433.1	CR	
		52.8	ARDMORE		423.1		
	7900	52.8	7.4	52.8	411.3	T	3.11
11.33			OVERBROOK			CR	
AM			9.9				
Arrive Daily			MARIETTA				
			10.0				
			THACKERVILLE				
			11.8				
			GAINESVILLE				
			(106.2)				
54.4			Average speed per hour				52.2

TCS IN EFFECT: On main track and sidings between Gainesville and Purcell.

Trains must get clearance card before leaving Purcell and Gainesville.

At Ardmore and Dougherty, maximum authorized speed on sidings 20 M.P.H. while head end of train is passing over hand-operated switches.

At Gainesville, First Class trains must register by Form 903.

Booth phone located at Washita River, M.P. 464.3.

Average Poles Per Mile:

Purcell to Ardmore 37 poles/mile.
Ardmore to Gainesville 40 poles/mile.

Location of switches not electrically locked on First District (Special Rule 4, page 15)

LOCATION	MILE POST	INDUSTRY SERVED
Pauls Valley	494.4	Ada District Wye
Pauls Valley	495.2	Compress Track

NORTHERN DIVISION

FIRST DISTRICT 3

1. SPEED REGULATIONS

(A) MAXIMUM AUTHORIZED SPEED

Location	MPH	
	Psg.	Frt.
First District	79	55*

Maximum authorized speed when averaging 85 tons or over per car, or total consist exceeds 5,000 tons 45 MPH

(B) SPEED RESTRICTIONS - TRACK, CURVES & BRIDGES

Location	MPH
2 Curves, M.P. 410.4 to 412.1	60
2 Curves, M.P. 414.6 to 416.1	60
4 Curves, M.P. 416.3 to 417.5	55
3 Curves and Red River Bridge, M.P. 417.7 to 419.1	35
6 Curves, M.P. 419.9 to 422.3	50
Curve, M.P. 427.9 to 428.2	75
2 Curves, M.P. 433.9 to 435.2	70
Curve, M.P. 437.6 to 438.8	70
Curve, M.P. 440.8 to 441.3	70
Curve, M.P. 446.3 to 446.8	75
Curve, M.P. 448.8 to 449.4	75
Ardmore, main track and siding, M.P. 449.7 to 451.0	25
3 Curves, M.P. 451.6 to 452.7	55
4 Curves, M.P. 453.2 to 454.6	50
7 Curves, M.P. 455.2 to 459.3	50
Curve, M.P. 459.6 to 460.3	45
Curve, M.P. 462.0 to 462.6	45
10 Curves, M.P. 462.8 to 466.4	35
Curve, M.P. 467.3 to 467.5	50
Curve, M.P. 467.9 to 468.2	70
Curve, M.P. 470.6 to 470.8	70
2 Curves, M.P. 471.1 to 472.5	60
4 Curves, M.P. 473.7 to 475.1	50
2 Curves, M.P. 475.3 to 476.3	55
Curve, M.P. 483.9 to 484.2	70
Curve, M.P. 489.4 to 489.9	75
2 Curves, M.P. 494.0 to 494.5	60
3 Curves, M.P. 496.7 to 499.7	75
2 Curves, M.P. 501.5 to 503.2	75
2 Curves, M.P. 503.3 to 504.5	60
5 Curves, M.P. 504.5 to 506.7	50
2 Curves, M.P. 507.3 to 508.8	60
Curve, M.P. 510.9 to 511.2	60
4 Curves, M.P. 513.2 to 515.4	55

(C) SPEED RESTRICTIONS - SWITCHES AND AUXILIARY TRACKS

Maximum speed permitted through turnout of other than main track switches, 10 MPH; each end sidings between Gainesville and Purcell, except siding Ardmore 30 MPH; other main track switches, except those listed below 15 MPH. Switches at each end sidings between Gainesville and Purcell are interlocked.

Trains and engines using auxiliary tracks must not exceed maximum turnout speed for that track.

"I"—Interlocking
 "S"—Spring

Station	Type	Location	MPH
Purcell	I	West end west tail track	30
	I	Crossover east end of yard	30

(C) SPEED RESTRICTIONS - SWITCHES AND AUXILIARY TRACKS — (Continued)

Pauls Valley	I	West leg wye Lindsay District	15
	I	Three crossovers	30
Ardmore	I	Both ends siding	25
Gainesville	I	East end tail track east end yard	30
	I	Crossover main track to tail track	30

(D) SPEED RESTRICTIONS - STREET CROSSINGS

Restriction applies only while head end of train is passing crossings in cities or towns named:

	MPH
Pauls Valley M.P. 494.5 to 496.1	30
Wynnewood M.P. 486.7 to 488.7	50
Davis M.P. 477.2 to 478.1	50
Ardmore M.P. 448.8 to 452.4	30
Marietta M.P. 432.8 to 433.3	50
Gainesville M.P. 409.5 to 412.0	30

2. OVERHEAD AND SIDE OBSTRUCTIONS (Rule 759)

M.P. 411.8	Viaduct, highway
M.P. 413.1	Viaduct, highway
M.P. 418.3	Bridge, Red River
M.P. 426.1	Viaduct, highway
M.P. 450.8	Viaduct, 5th Ave.
M.P. 451.1	Viaduct, SL-SF Ry.
M.P. 452.1	Viaduct, highway
M.P. 476.1	Viaduct, highway

3. TRACKS BETWEEN STATIONS

Name	Mile Post	Car Capacity in Feet
Ardmore Industrial Lead	449.6	26,400
Ardmore Air Park	461.1	6,550
Crusher	465.7	11,050
Dolose storage tracks	466.9	3,100
Rayford storage tracks	473.3	5,600

TRACK SIDE WARNING DEVICE

Location	Type	Signals or indicators affected
M.P. 422.7	Dragging equipment	Rotating white light located at: M.P. 422.7 and M.P. 421.1
Bridge 467.5	High Water	Eastward-Block Signal 4662 Westward-Controlled signals at west end siding Dougherty

When HIGH WATER DETECTOR is actuated, signals will display most restrictive indication. Trains receiving verbal permission to pass controlled signals in stop position and trains passing stop and proceed Block Signal 4662 must stop and make inspection of bridge and track to be sure safe before passing over, unless otherwise instructed by train dispatcher. Report must be made to dispatcher by first means of communication.

When DRAGGING EQUIPMENT DETECTOR indicator light is illuminated an immediate stop must be made, thorough inspection made of both sides of train, track inspected and control station notified.

WESTWARD				TIME TABLE No. 7 June 15, 1977	EASTWARD				
First Class		Capacity of Siding in Feet	Ruling Grade Ascending		Ruling Grade Ascending	Mile Post	Communications Tuna Tables and Wyes	First Class	
15	21							16	22
Leave Daily AM	Leave Mon. Thur. Sat.	Feet Per Mile	STATIONS		Feet Per Mile	Arrive Daily PM	Arrive Sun. Tae. Fri.		
11.33			GAINESVILLE 0.6	34.3	411.3	T CR	3.11		
\$11.36			GAINESVILLE P. D. 9.9	40.6	410.7		\$ 3.10		
		8400	VALLEY VIEW 8.6	52.8	400.8	B			
			SANGER 5.4	52.8	392.2	CR			
PM 12.01		8500	DALTON JCT. 3.3	52.8	386.8		2.37		
			KRUM 6.2	52.8	383.5				
		8100	PONDER 6.7	52.8	377.3				
			JUSTIN 8.6	52.8	370.6	C			
		6500	HASLET 8.1	52.8	362.0				
			F.W. & D. Crossing SAGINAW		353.9	C	2.02		
12.32		S 11000 N12200	C.R.I. & P. Crossing 5.1	52.8					
		4400	F.W. Belt Crossing St. L.S.W. Crossing NORTH FORT WORTH S.L.-S.F. Crossing		348.8	C			
	Via T.&P.		2.3	52.8			Via T.&P.		
\$12.55 1.10	AM 7.35 7.50		FORT WORTH 0.3	.0	346.0	T CR	\$ 1.50 \$ 8.25		
			S. P. Crossing T. & P. Crossing		345.7				
			0.1	.0	345.6				
			T. & P. Crossing 0.1	.0	345.5				
		1850	T. & P. Crossing 0.6	.0	344.9				
			POLKS 2.1	.0					
16 1.20	7.58	6000	BIRDS YL 0.6	.0	342.8		15 1.20 8.11		
			S.L.-S.F. Crossing 8.5	12.7	342.2				
1.30	8.07	7950	CROWLEY 8.4	8.2	333.7		1.11 8.02		
1.40	8.15	8350	JOSHUA 7.8	61.0	325.3		1.03 7.53		
\$ 1.55	\$ 8.30		CLEBURNE YL		317.5	TY CR	12.51 7.45		
PM	AM						PM PM		
Arrive Daily	Arrive Daily		(93.8)				Leave Daily Leave Daily		
39.6	42.7		Average speed per hour				40.2 42.7		

TCS IN EFFECT: On main track and sidings between Birds and Gainesville, except between westward controlled signals, west end Fort Worth 17th Street Yard and eastward controlled signals at east end Freight Main, M.P. 346.8, and on sidings North Fort Worth and Saginaw.

Trains must get clearance card before leaving Cleburne, Fort Worth and Gainesville.

At Gainesville, First Class trains must register by Form 903.

At Cleburne, Trains No. 21 and No. 22 must register by Form 903.

At Fort Worth, interlocking signal at west end passenger yard is two-unit colorlight signal. Top unit governs westward movements to Santa Fe track; bottom unit governs movements to the Southern Pacific track.

At Cleburne, Cresson District Junction switch normally lined for Second District.

At Cleburne, train order waiting time governing eastward trains applies at Boone Street overpass, M.P. 318.8.

RULE 94 IN EFFECT: At Cleburne, between Signals 3172 and 3177; at Fort Worth, between westward controlled signals, west end 17th Street Yard, and eastward controlled signals, east end Freight Main, M.P. 346.8.

Average Poles Per Mile:

Gainesville to Sanger 40 poles/mile
Sanger to Cleburne 35 poles/mile

NORTHERN DIVISION

SECOND DISTRICT 5

1. SPEED REGULATIONS

(A) MAXIMUM AUTHORIZED SPEED

SECOND DISTRICT	MPH	
	Psgr.	Frts.
	79	55*

*Maximum authorized speed when averaging 85 tons or over per car, or total consist exceeds 5,000 tons 45 MPH

(B) SPEED RESTRICTIONS - CURVES, TRACK & RR CROSSINGS

Location	MPH
2 Curves, M.P. 317.2 to 318.7	45
Curve, M.P. 327.2 to 327.5	65
Curve, M.P. 329.1 to 329.3	65
RR Crossing, M.P. 342.2 Interlocking	40
Curve, M.P. 342.5 to 342.7	40
5 Curves, M.P. 344.2 to 345.4	20
Track, M.P. 345.4 to 346.6	10
RR Crossings, M.P. 345.5 to 345.7 Interlocking	10
3 Curves, M.P. 346.8 to 347.9	45
RR Crossings, M.P. 348.5 to 348.9 Interlocking	40
2 Curves, M.P. 349.6 to 351.0	60
Curve, M.P. 351.7 to 352.1	70
RR Crossings, M.P. 353.8 Interlocking	40
Curve, M.P. 359.5 to 359.8	75
Curve, M.P. 361.6 to 362.2	75
Curve, M.P. 363.8 to 363.9	75
Curve, M.P. 365.9 to 366.1	75
Curve, M.P. 369.1 to 369.4	75
Curve, M.P. 370.2 to 370.4	70
Curve, M.P. 377.4 to 378.2	75
2 Curves, M.P. 382.4 to 383.3	70
Curve, M.P. 384.8 to 385.3	75
Curve, M.P. 389.3 to 389.7	55
Curve, M.P. 393.7 to 394.0	75
Curve, M.P. 398.8 to 399.1	65
Curve, M.P. 400.5 to 400.7	75
Curve, M.P. 402.5 to 403.2	75
3 Curves, M.P. 406.7 to 408.4	75
2 Curves, M.P. 410.4 to 412.1	60

(C) SPEED RESTRICTIONS - SWITCHES AND AUXILIARY TRACKS

Maximum speed permitted through turnout of other than main track switches, 10 MPH; each end sidings between Cleburne and Gainesville, except sidings Saginaw, North Fort Worth, Polks and Birds, 30 MPH; other main track switches except those listed below, 15 MPH. Switches at each end of sidings Birds to Gainesville are interlocked.

Trains and engines using auxiliary tracks must not exceed maximum turnout speed for that track.

"I"—Interlocking

"S"—Spring

Station	Type	Location	MPH
Gainesville P.D.	I	West end Long track	15
Dalton Jct.	I	Both ends pocket track	30
	I	Dallas District Junction	40
Saginaw	I	Both ends of North and South sidings	15
North Fort Worth	I	Both ends siding	15
Fort Worth	I	East end Freight Main	15
Polks	I	Both ends siding	15

(C) SPEED RESTRICTIONS - SWITCHES AND AUXILIARY TRACKS (Continued)

Birds	I	Both ends siding	15
	I	Dublin Dist. Junction	10
Crowley	S	Both ends siding	30
Joshua	S	Both ends siding	30
Cleburne	S	East end tail track east end of yard	30

(D) SPEED RESTRICTIONS - STREET CROSSINGS

Restriction applies only while head end of train is passing crossings in cities or towns named:

	MPH
Cleburne M.P. 317.0 to 319.0	18
Crowley M.P. 331.9 to 335.8	65
Fort Worth M.P. 337.2 to 343.2	40
Fort Worth M.P. 343.2 to 346.9	20
Fort Worth-Saginaw M.P. 346.9 to 358.5	40
Sanger M.P. 391.9 to 392.5	50
Gainesville M.P. 409.5 to 412.0	30

2. OVERHEAD AND SIDE OBSTRUCTIONS (Rule 759)

M.P. 318.8	Viaduct, Boone St.
M.P. 320.9	Viaduct, highway
M.P. 339.9	Viaduct, highway
M.P. 344.1	Viaduct, S. Main St.
M.P. 344.3	Viaduct, Allen Ave.
M.P. 345.1	Viaduct, Hattie St.
M.P. 346.7	Viaduct, Weatherford-Belknap Sts.
M.P. 348.1	Viaduct, highway
M.P. 348.5	Bridge, Trinity River
M.P. 349.4	Viaduct, highway
M.P. 350.9	Viaduct, highway
M.P. 352.6	Viaduct, highway
M.P. 358.7	Viaduct, highway
M.P. 381.6	Viaduct, highway
M.P. 388.6	Viaduct, highway

3. TRACKS BETWEEN STATIONS

Name	Mile Post	Track Capacity in Feet
Danci	328.3	1,350
Southwest Wood Products	336.2	350

TRACK SIDE WARNING DEVICE

Location	Type	Signals or indicators affected
M.P. 351.4	Dragging equipment	Rotating white light located at: M.P. 351.4 and M.P. 349.9

When DRAGGING EQUIPMENT DETECTOR indicator light is illuminated an immediate stop must be made, thorough inspection made of both sides of train or cut of cars being handled, track inspected and control station notified.

WESTWARD			TIME TABLE No. 7 June 15, 1977	EASTWARD		
↓	Capacity of Siding in Feet	Ruling Grade Ascending		Ruling Grade Ascending	Mile Post	Communications Turn Tables and Ways
		Feet Per Mile	Feet Per Mile			
STATIONS			STATIONS			
			FORT WORTH			
		47.5	3.4	.0	346.0	T CR
	6000	.0	BIRDS	64.4	342.8	
			0.9		0.9	
		66.0	BELT JCT.	58.1		
	7000		7.5		8.4	B
		66.0	PRIMROSE	66.5		
			13.6			
			CRESSON		22.0	Y
	7000	66.0	8.7	66.5	30.7	B
		66.0	WAPLES	66.0	36.5	C
			5.8			
		66.0	GRANBURY	52.8	46.4	B
	7000		9.9	66.0	55.1	B
		58.8	TOLAR		62.5	B
			8.7			
		66.0	BLUFFDALE	.0	72.3	CR
	7000		7.4	44.9	86.1	C
		66.0	IMMERMERE			
			9.8			
	7000	66.0	STEPHENVILLE	66.0		
			13.8			
	8150	.0	DUBLIN	31.6	86.2	
			0.1	66.0	95.3	
		52.3	T.C. Crossing			
	7450		9.1	42.2	108.1	CR
		66.0	PROCTOR		121.7	B
			12.8	46.5	128.0	
	7000	66.0	COMANCHE	66.0	344.4	
			13.6		348.4	TY CR
	7000	66.0	BLANKET			
			6.3			
	7350	66.0	DELAWARE			
			7.1			
	5600	.0	RICKER			
		.0	4.0			
			BROWNWOOD YL			
			(141.8)			

TCS IN EFFECT: On main track and sidings between Birds and eastward controlled signal M.P. 348.1, Brownwood.

Trains must get clearance card before leaving Fort Worth and Brownwood.

At Cresson, Tolar and Dublin, maximum authorized speed on sidings 20 M.P.H. while head end of train is passing over hand-operated switches.

Between Fort Worth and Birds, Second District time table rules will govern.

Average Poles Per Mile:

Ft. Worth to Brownwood 30 poles/mile

Location of switches not electrically locked on Dublin District (Special Rule 4, page 15).

TRACK SIDE WARNING DEVICE

LOCATION	MILE POST	INDUSTRY SERVED
Fort Worth	4.7	84 Lumber Co.
De Cardova Spur	42.3	Texas Power & Light Co.
Stephenville	71.9	Stephenville Compress Co.
Stephenville	72.1	Texaco Oil Co. - Nix Hdwe. Co.
Stephenville	73.5	Celebrity Home Corp.
Stephenville	73.6	Cook Bros. Lbr. Co.
Stephenville	73.8	Caporal Forging, Inc.
Dublin	86.1	T.C. Interchange
Dublin	86.5	Dublin Warehouse Co.
Proctor	95.2	House Track
Comanche	108.0	Gore Bros.
Comanche	108.1	Turkey Dressing Plant City Warehouse & Supply Texas Highway Department Moorman Mfg. Co.
Comanche	109.4	
Centex	110.8	Central Texas Fertilizer Co.
Blanket	121.5	Team Track

Location	Type	Signals or Indicators Affected
Bridge 64.1	High Water	Eastward-Block Signal 652 Westward-Controlled signals west end siding Immermere
Bridge 80.6	High Water	Eastward-Controlled signals east end siding Dublin Westward-Controlled signals west end siding Stephenville

When HIGH WATER DETECTOR is actuated, signals will display most restrictive indication. Trains receiving verbal permission to pass controlled signals in stop position and trains passing stop and proceed Block Signal 652 must stop and make inspection of bridge and track to be sure safe before passing over, unless otherwise instructed by train dispatcher. Report must be made to dispatcher by first means of communication.

1. SPEED REGULATIONS

(A) MAXIMUM AUTHORIZED SPEED

Between:	
M.P. 0.0 and M.P. 1.7	20 MPH
M.P. 1.7 and M.P. 5.1	40 MPH
M.P. 5.1 and Brownwood	49 MPH*

*Maximum authorized speed when averaging 85 tons or over per car, or total consist exceeds 5,000 tons ... 45 MPH

(B) SPEED REGULATIONS - CURVES, BRIDGES & RR CROSSINGS

Location	MPH
2 Curves, M.P. 0.0 to 0.9	10
3 Curves, M.P. 5.5 to 6.6	45
Curve, M.P. 21.3 to 21.7	45
8 Curves, M.P. 25.0 to 28.5	40
3 Curves, M.P. 29.4 to 30.0	30
Curve, M.P. 34.7 to 35.1	40
2 Curves, M.P. 39.0 to 39.5	30
Stroud's Creek Bridge, M.P. 39.2	20
4 Curves, M.P. 39.7 to 41.0	40
5 Curves, M.P. 41.0 to 43.4	30
2 Curves, M.P. 43.5 to 44.1	45
Curve, M.P. 45.6 to 45.8	40
Curve, M.P. 48.3 to 48.6	40
6 Curves, M.P. 48.9 to 50.5	30
Curve, M.P. 52.3 to 52.9	35
Curve and Paluxy Creek Bridge, M.P. 53.6 to 53.8	40
6 Curves and South Paluxy Creek Bridge, M.P. 55.3 to 57.4	40
10 Curves, M.P. 60.3 to 66.2	40
2 Curves and Bosque River Bridge, M.P. 71.0 to 71.9	30
Curve, M.P. 72.4 to 72.6	30
Curve, M.P. 73.4 to 73.6	45
Curve, M.P. 75.1 to 75.3	45
4 Curves, M.P. 75.6 to 76.8	40
Curve, M.P. 79.1 to 79.4	45
17 Curves, M.P. 79.6 to 85.5	40
2 Curves, M.P. 85.7 to 86.2	35
RR Crossing, M.P. 86.2 Auto. Interlocking	30
Curve, M.P. 86.7 to 86.9	45
7 Curves, M.P. 89.0 to 91.8	40
8 Curves, M.P. 95.9 to 98.4	35
3 Curves, M.P. 98.6 to 99.8	40
Curve, M.P. 100.3 to 100.4	45
4 Curves, M.P. 101.1 to 102.4	40
9 Curves, M.P. 111.1 to 114.0	40
4 Curves, M.P. 114.1 to 115.1	40
Curve, M.P. 118.1 to 118.4	45
13 Curves, M.P. 122.0 to 126.9	40
Curve, M.P. 134.5 to 134.6	40
4 Curves and Pecan Bayou Bridge, M.P. 345.2 to 346.3	25
2 Curves, M.P. 347.7 to 348.2	30

(C) SPEED RESTRICTIONS - SWITCHES AND AUXILIARY TRACKS

Maximum speed permitted through turnout of other than main track switches, 10 MPH; each end sidings between Birds and Brownwood, except sidings Birds and Cresson 30 MPH; other main track switches, except those listed below, 15 MPH. Switches at each end of sidings Birds to Brownwood are interlocked.

Trains and engines using auxiliary tracks must not exceed maximum turnout speed for that track.

"I"—Interlocking

"S"—Spring

Station	Type	Location	MPH
Birds	I	Both ends siding	15
	I	Dublin District Junction	10
Belt Jct.	S	East wye switch	10
Cresson	I	Cresson District Junction	30
Ricker	I	Both ends pocket track	30
	I	Lampasas District Junction	40
Brownwood	I	East end tail track	20
	S	West end outbound lead	10
	I	West end yard lead M.P. 349	15

(D) SPEED RESTRICTIONS - STREET CROSSINGS

Restriction applies only while head end of train is passing crossings in cities or towns named:

Brownwood	M.P. 347.9 to 349.4	18 MPH
Comanche	M.P. 107.2 to 109.3	20 MPH
Dublin	M.P. 85.0 to 86.8	30 MPH
Granbury	M.P. 35.5 to 37.7	30 MPH

2. OVERHEAD AND SIDE OBSTRUCTIONS (Rule 759)

M.P. 3.0	Viaduct, highway
M.P. 53.6	Bridge, Paluxy Creek
M.P. 56.4	Bridge, South Paluxy Creek
M.P. 70.5	Viaduct, highway
M.P. 71.3	Bridge, Bosque River
M.P. 73.4	Viaduct, highway
M.P. 98.0	Bridge, Leon River
M.P. 106.9	Viaduct, highway
M.P. 344.9	Viaduct, highway
M.P. 345.3	Bridge, Pecan Bayou

3. TRACKS BETWEEN STATIONS

Name	Mile Post	Track Capacity in Feet
DeCardova Spur	42.3	1,490
Moorman Mfg. Co.	109.4	1,330
Centex	110.8	500

WESTWARD			TIME TABLE No. 7 June 15, 1977	EASTWARD			
↓	Capacity of Siding in Feet	Ruling Grade Ascending		STATIONS	Ruling Grade Ascending	Mile Post	↑ Communications Turn Tables and Wyes
	8500	42.2	DALTON JCT. 6.5	52.8	111.2		
		10.6	DENTON 2.3	42.2	104.7	C	
	3850	52.8	MINCHIN 27.1	52.8	102.4	B	
	3550	52.8	COWLEY 5.0	66.0	75.3	B	
		15.8	RICHARDSON 0.2	.0	70.3		
		63.4	S. P. Crossing 6.4	52.8	70.1		
		31.7	WHITE ROCK YL 1.1	10.4	63.7		
	5800	.0	ZACHA JCT. 2.3	40.1	62.6	BR	
		52.8	REINHARDT 5.6	53.8	60.3		
		.0	T. & P. Crossing 0.4	.0	53.7		
		.0	S. P. Crossing 0.1	10.5	53.3		
		.0	DALLAS YL 0.7	38.0	53.2	T CR	
		.0	S. P. Crossing 0.6	63.3	52.5		
		.0	St. L. S. W. Crossing 0.1	22.2	51.9		
		.0	SANTA FE JCT. 0.1	22.2	51.8	Y	
		.0	M-K-T Crossing 0.1	.0	51.7		
	23.0	37.0	TERMINAL JCT. 2.0	.0	51.6	Y	
	2100	67.0	OAK CLIFF 3.9	.0	49.6		
	1800	66.0	HALE YL 5.6	70.2	45.7		
	1700	77.6	DUNCANVILLE YL 5.5	68.6	40.1		
	950	67.5	CEDAR HILL 7.3	71.0	34.6		
		49.6	S. P. Crossing 0.4	.0	27.3		
	2350	46.9	MIDLOTHIAN YL 7.3	52.8	26.9	CR	
	1850	76.5	VENUS 6.9	71.2	19.6		
	1700	26.4	ALVARADO 1.3	67.5	12.7	B	
		74.4	M-K-T Crossing 11.4	66.0	11.4		
			CLEBURNE YL		0.0	TY CR	
			(111.2)				

TCS IN EFFECT: On main track between east end siding Hale and westward controlled signal at Southern Pacific crossing, M.P. 52.5; on main track between eastward controlled signals, M.P. 53.7, and Zacha Jct. and on siding Zacha Jct.

At Dallas, TCS in effect on Southern Pacific main track between M.P. 51.7 and 52.7.

Signals on the industrial lead and connecting tracks between the Southern Pacific connection at Santa Fe Jct. and west end Dallas yard at Good-Latimer Expressway, M.P. 52.6,

govern movements over interlocked switches only. Movements on the industrial lead are governed by Rule 127.

Trains must get clearance card before leaving Dallas.

At Cleburne, Second District time table rules will govern.

Booth phones located at M.P. 80.5, and M.P. 91.0

Average Poles Per Mile:

Cleburne to Dalton Jct. 35 poles/mile

1. SPEED REGULATIONS

(A) MAXIMUM AUTHORIZED SPEED

Between:	
Cleburne and Dallas	35 MPH
Dallas and White Rock	30 MPH
White Rock and Dalton Jct.	49 MPH*

*Maximum authorized speed when averaging 85 tons or over per car, or total consist exceeds 5,000 tons 45 MPH

(B) SPEED RESTRICTIONS - CURVES & RR CROSSINGS

Location	MPH
Curve, M.P. 0.0 to 0.3	10
RR Crossing, M.P. 11.4 Auto. Interlocking	20
2 Curves, M.P. 12.3 to 13.4	25
RR Crossing, M.P. 27.3 Auto. Interlocking	20
6 Curves, M.P. 48.1 to 49.8	25
RR Crossings, M.P. 51.7 to 52.5 Interlocking	30
RR Crossing, M.P. 53.3 Gate*	6
RR Crossing, M.P. 53.7 Auto. Interlocking**	30
RR Crossing, M.P. 70.1 Auto. Interlocking	20
Curve, M.P. 70.1 to 70.8	40
Curve, M.P. 110.3 to 111.2	40

*Gate normally lined against Southern Pacific. Approach crossing prepared to stop. If crossing clear and gate properly lined, proceed without stopping at speed not exceeding 6 MPH until engine over crossing.

**At Texas Pacific Crossing, M.P. 53.7, if controlled signal governing movement over crossing is in stop position, communicate with control station. If authorized to pass stop signal, before proceeding, a member of crew must go to control box at crossing and follow instructions therein.

(C) SPEED RESTRICTIONS - SWITCHES AND AUXILIARY TRACKS

Maximum speed permitted through turnout of other than main track switches, 10 MPH; main track switches, except those listed below, 15 MPH.

Trains and engines using auxiliary tracks must not exceed maximum turnout speed for that track.

"I"—Interlocking

"S"—Spring

Station	Type	Location	MPH
Hale	S	East end siding	15
Oak Cliff	S	Both ends siding	15
Dallas	I	Terminal Junction	10
	I	Santa Fe Jct.	10
Zacha Jct.	I	Both ends siding	20
	I	Paris District Junction	30

(D) SPEED RESTRICTIONS—STREET CROSSINGS

Restriction applies only while head end of train is passing crossings in cities or towns named, except Dallas 20 MPH restriction continuous MP 41.6 to MP 68.4.

Cleburne	M.P. 0.0 to 1.4	18 MPH
Midlothian	M.P. 26.2 to 27.7	25 MPH
Duncanville	M.P. 37.5 to 41.6	20 MPH
Dallas	M.P. 41.6 to 68.4	20 MPH
Oak Cliff	M.P. 49.6 (Ewing Ave.)	10 MPH
Richardson	M.P. 68.4 to 73.5	20 MPH

2. OVERHEAD AND SIDE OBSTRUCTIONS (Rule 759)

M.P. 11.6	Viaduct, highway
M.P. 12.0	Viaduct, highway
M.P. 19.9	Viaduct, M.P. Ry.
M.P. 32.6	Viaduct, highway
M.P. 35.7	Viaduct, highway
M.P. 43.6	Viaduct, highway
M.P. 48.6	Viaduct, highway
M.P. 48.7	Viaduct, Zangs Blvd.
M.P. 49.5	Viaduct, Marsalis Ave.
M.P. 51.1	Bridge, Trinity River
M.P. 51.7	Signal bridge
M.P. 52.9	Viaduct, Oakland St.
M.P. 53.3	Viaduct, highway
M.P. 55.8	Viaduct, Brookside Dr.
M.P. 56.6	Viaduct, highway
M.P. 57.0	Bridge, White Rock Creek
M.P. 63.1	Viaduct, highway
M.P. 66.7	Viaduct, Skillman Road
M.P. 66.8	Viaduct, Forest Lane Road
M.P. 76.6	Viaduct, highway
M.P. 83.3	Viaduct, highway
M.P. 85.7	Viaduct, Government Road
M.P. 103.8	Viaduct, highway
M.P. 104.1	Viaduct, highway

HALE CEMENT LINE

M.P. 3.5	Overhead Gas Main
M.P. 3.6	Viaduct, highway
M.P. 4.6	Viaduct, highway
M.P. 4.7	Viaduct, highway
M.P. 5.5	Viaduct, highway
M.P. 7.2	Viaduct, highway

3. TRACKS BETWEEN STATIONS

Name	Mile Post	Track Capacity in Feet
Chaparral Steel Co.	23.2	12,200
Storage	24.3	950
Ward	24.7	3,050
Gasco	39.0	150
Hale Cement Line (8.9 Miles)	45.8	
Casa Linda lead	61.7	3,500
Casa Linda freight facilities	61.7	2,350
Casa Linda TOFC facilities	61.7	16,600
White Rock industrial lead	63.7	15,000
Gaylord Container	64.3	1,860
Jupiter Road industrial lead	64.4	1,960
Hesse Envelope	65.4	1,500
Dal-Gar	66.4	2,750
Buell Lumber	67.1	1,530
Arapaho Team Track	70.2	600
Vent-A-Hood	70.4	1,500
Lewisville Team Track	90.8	500

WESTWARD			TIME TABLE No. 7 June 15, 1977	EASTWARD		
Capacity of Siding in Feet	Ruling Grade Ascending	Feet Per Mile		Ruling Grade Ascending	Mile Post	Communications Turn Tables and Wyes
			BROWNWOOD YL			
	66.0	9.5		64.9	348.4	TY CR
7100	64.9	BANGS		64.9	357.9	
6750	66.0	6.3	OBREGON	20.5	364.2	B
3650	64.9	5.5	SANTA ANNA	62.3	369.7	
	66.0	3.8	SAN ANGELO JCT.	50.6	373.5	Y B
9190	31.7	4.8	COLEMAN	23.8	378.3	CR
5500	31.7	12.7	SILVER VALLEY	31.7	391.0	B
5400	31.7	5.5	NOVICE	31.7	396.5	B
4100	31.7	6.4	GOLDSBORO	31.7	402.9	
4100	31.7	6.6	LAWN	12.7	409.5	
5200	15.8	5.9	TUSCOLA	.0	415.4	B
	31.7	0.6	A. & S. Crossing	31.7	416.0	
4000	31.7	4.3	BUFFALO GAP	31.7	420.3	
6750	31.7	6.3	VIEW	31.7	426.6	B
4050	31.7	5.4	COZART	31.7	432.0	
6250	31.7	11.3	TOLAND	31.7	443.3	B
3900	31.7	5.1	HERNDON	31.7	448.4	
6500	31.7	6.1	TECIFIC	31.7	454.5	
		5.1	SWEETWATER		459.6	TY CR
			(11.2)			

TCS IN EFFECT: On main track between Orient Jct., on Plains Division, and M.P. 454.2, Sweetwater District, and on siding Tecific.

Trains must get clearance card before leaving Sweetwater.

At San Angelo Jct., San Angelo District Junction switch normally lined for Sweetwater District.

Average Poles Per Mile:
Brownwood to Sweetwater 31 poles/mile

1. SPEED REGULATIONS

(A) MAXIMUM AUTHORIZED SPEED

Sweetwater District 55 MPH*

*Maximum authorized speed when averaging 85 tons or over per car, or total consist exceeds 5,000 tons . . . 45 MPH

(B) SPEED RESTRICTIONS - CURVES & RR CROSSING

	MPH
Curve, M.P. 349.8 to 350.1	35
4 Curves, M.P. 350.8 to 353.2	30
Curve, M.P. 362.3 to 362.7	50
2 Curves, M.P. 369.4 to 370.8	30
3 Curves, M.P. 380.2 to 381.9	45
2 Curves, M.P. 383.4 to 383.8	50
Curve, M.P. 386.3 to 386.6	40
Curve, M.P. 391.3 to 391.7	45
Curve, M.P. 395.2 to 395.7	55
2 Curves, M.P. 397.6 to 398.3	45
Curve, M.P. 399.6 to 400.1	45
2 Curves, M.P. 410.7 to 411.3	50
RR Crossing, M.P. 416.0 Manual Interlocking	55
2 Curves, M.P. 455.7 to 457.1	45
Curve, M.P. 458.0 to 458.3	40
Curve, M.P. 460.4 to 460.6	50

(C) SPEED RESTRICTIONS - SWITCHES AND AUXILIARY TRACKS

Maximum speed permitted through turnout of other than main track switches, 10 MPH; main track switches, except those listed below, 15 MPH.

Trains and engines using auxiliary tracks must not exceed maximum turnout speed for that track.

"I"—Interlocking

"S"—Spring

Station	Type	Location	MPH
Brownwood	I	West end yard lead M.P. 349	15
	S	West end outbound lead	10
	I	East end tail track	20
Bangs	S	Both ends siding	20
Obregon	S	Both ends siding	20
Santa Anna	S	Both ends siding	20
San Angelo Jct.	S	San Angelo District Junction	20

(C) SPEED RESTRICTIONS - SWITCHES AND AUXILIARY TRACKS—(Cont'd)

Station	Type	Location	MPH
Coleman	S	Both ends siding	20
Silver Valley	S	Both ends siding	20
Novice	S	Both ends siding	20
Goldsboro	S	Both ends siding	20
Lawn	S	Both ends siding	20
Tuscola	S	Both ends siding	20
Buffalo Gap	S	Both ends siding	20
View	S	Both ends siding	20
Cozart	S	Both ends siding	20
Toland	S	Both ends siding	20
Herndon	S	Both ends siding	20
Tecific	I	Both ends siding	30
	I	Turnout from siding to T.& P.	30
Sweetwater	I	Both ends Track No. 1	20
	I	East and west legs of wye	15
	I	Orient Jct.	15

(D) SPEED RESTRICTIONS—STREET CROSSINGS

Restriction applies only while head end of train is passing crossings in cities or towns named:

Brownwood	M.P. 347.9 to 349.4	18 MPH
Santa Anna	M.P. 369.0 to 370.6	30 MPH
Coleman	M.P. 378.2 to 379.6	30 MPH
Sweetwater	M.P. 1.3, Sweetwater Yard, to M.P. 641.6, Sayard Dist.	12 MPH

2. OVERHEAD AND SIDE OBSTRUCTIONS (Rule 759)

M.P. 370.7	Viaduct, highway
M.P. 375.5	Viaduct, highway
M.P. 378.0	Viaduct, highway
M.P. 417.8	Viaduct, highway
M.P. 426.5	Viaduct, highway
M.P. 449.3	Viaduct, highway
M.P. 3.0	Viaducts, highway and T&P Ry.

3. TRACKS BETWEEN STATIONS

Name	Mile Post	Track Capacity in Feet
Grimes	445.8	550
Tesco	450.1	1,150

WESTWARD			TIME TABLE No. 7 June 15, 1977	EASTWARD		
Capacity of Siding in Feet	Ruling Grade Ascending	Feet Per Mile		STATIONS	Ruling Grade Ascending	Mile Post
			2650			
5000	65.5		TALPA	66.0	20.9	
1400	62.8		BALLINGER YL	26.4	36.9	C
2550	62.8		ROWENA	51.7	45.6	
2450	62.8		MILES	52.8	54.2	
2650	62.8		HARRIET	52.8	63.1	
			SAN ANGELO YL		69.6	Y CR
			(69.6)			

At San Angelo Jct., Sweetwater District Junction switch normally lined for Sweetwater District.

At San Angelo, switches on east and west legs of wye, Northern Division Junction, San Angelo District, normally lined for Plains Division, Fort Stockton District.

Average Poles Per Mile:

San Angelo Jct. to San Angelo 30 poles/mile

1. SPEED REGULATIONS

(A) MAXIMUM AUTHORIZED SPEED

San Angelo District 30 MPH

(B) SPEED RESTRICTIONS - CURVES & BRIDGES

Location	MPH
Curve, M.P. 10.5 to 10.7	25
Curve and Colorado River Bridge, M.P. 37.4 to 37.7	20

(C) SPEED RESTRICTIONS - SWITCHES AND AUXILIARY TRACKS

Maximum speed permitted through turnout of other than main track switches, 10 MPH; main track switches, 15 MPH.

Trains and engines using auxiliary tracks must not exceed maximum turnout speed for that track.

(D) SPEED RESTRICTIONS - STREET CROSSINGS

Restriction applies only while head end of train is passing crossings in cities or towns named:

Ballinger	M.P. 36.4 to 37.6	18 MPH
San Angelo	M.P. 68.9 to 69.6	15 MPH

2. OVERHEAD AND SIDE OBSTRUCTIONS (Rule 759)

M.P. 36.1	Viaduct, highway
M.P. 37.6	Bridge, Colorado River

3. TRACKS BETWEEN STATIONS

Name	Mile Post	Track Capacity in Feet
Spur Track No. 2	11.3	600

PARIS DISTRICT

WESTWARD		TIME TABLE No. 7 June 15, 1977	EASTWARD		
Capacity of Siding in Feet	Ruling Grade Ascending		Ruling Grade Ascending	Mile Post	Communications Turn Tables and Wyes
		STATIONS			
		PARIS YL		151.1	C
		0.8	21.1		
1650	.0	T. & P. Crossing		150.3	
	52.8	11.8	62.8		
		ROXTON		138.5	
	52.8	5.5	52.8		
		BEN FRANKLIN		133.0	
	53.0	5.4	3.7		
		PECAN GAP		127.6	
	52.8	6.0	52.8		
1550		LADONIA		121.6	
	52.8	8.3	12.6		
		WOLFE CITY YL		113.3	C
	.0	8.9	52.8		
1700		M-K-T Crossing		104.4	
	.0	0.1	14.2		
		CELESTE		104.3	
	52.8	13.2	57.0		
		L. & A. Jct.		91.1	
	.0	0.1	3.7		
1700		FARMERSVILLE YL		91.0	CR
	52.8	6.7	52.8		
1700		COPEVILLE		84.3	
	53.4	8.5	53.4		
1700		WYLIE		75.8	
	52.8	4.2	52.8		
1700		SACHSE		71.6	
	51.2	4.8	52.8		
		M-K-T Crossing		66.8	
	40.6	0.4	.0		
1950		GARLAND YL		66.4	CR
	48.5	3.8	53.3		
5600		ZACHA JCT.		62.6	BR
		(88.5)			

At Zacha Jct., Dallas District time table rules will govern.
 At Farmersville, L&A Jct. switch normally lined for L&A.
 Average Poles Per Mile:
 Paris to Zacha Jct. 35 poles/mile

1. SPEED REGULATIONS

(A) MAXIMUM AUTHORIZED SPEED

Between:

Zacha Jct. and Farmersville	30 MPH
Farmersville and Paris	20 MPH

(C) SPEED RESTRICTIONS - SWITCHES AND AUXILIARY TRACKS

Maximum speed permitted through turnout of other than main track switches, 10 MPH; main track switches, 15 MPH.

Trains and engines using auxiliary tracks must not exceed maximum turnout speed for that track.

(D) SPEED RESTRICTIONS - STREET CROSSINGS

Restriction applies only while head end of train is passing crossings in cities or towns named:

Wolfe City	M.P. 113.4 to 113.6	15 MPH
------------	---------------------	--------

(E) SPEED RESTRICTIONS - RAILROAD CROSSINGS AT GRADE

Station	M.P.	Type	MPH
*Garland	66.8	Automatic Interlocking	20
Celeste	104.4	Automatic Interlocking	20
*Paris	150.3	Railroad Crossing, T&P, Stop, Rule 98(B)	6

*Speed applies only to head end of train.

2. OVERHEAD AND SIDE OBSTRUCTIONS (Rule 759)

M.P. 62.8	Viaduct, highway
M.P. 83.8	Viaduct, highway

3. TRACKS BETWEEN STATIONS

Name	Mile Post	Track Capacity in Feet
Team track	63.0	950
Texas Industries	63.0	250
Team track	64.9	300
Inter-Continental, 5 tracks	67.4	4,550

CRESSON DISTRICT

LINDSAY DISTRICT

WESTWARD		TIME TABLE No. 7 June 15, 1977	EASTWARD		
Capacity of Siding in Feet	Ruling Grade Ascending		Ruling Grade Ascending	Mile Post	Communications Turn Tables and Wyes
850	52.8	CLEBURNE YL 11.3 GODLEY 8.1	56.4	317.5	Y CR
7000	55.4		CRESSON YL	34.8	18.4
(19.4)					

WESTWARD		TIME TABLE No. 7 June 15, 1977	EASTWARD		
Capacity of Siding in Feet	Ruling Grade Ascending		Ruling Grade Ascending	Mile Post	Communications Turn Tables and Wyes
10800	31.6	PAULS VALLEY YL 12.6 MAYSVILLE 11.3	31.6	495.6	CR
1250	10.5		LINDSAY YL	.0	23.4
(23.9)					

At Cleburne, Second District time table rules will govern.
At Cresson, Dublin District time table rules will govern.

1. SPEED REGULATIONS

(A) MAXIMUM AUTHORIZED SPEED

Cresson District 30 MPH

(B) SPEED RESTRICTIONS - CURVES & BRIDGES

Curve, M.P. 0.0. to 0.1 10 MPH

(C) SPEED RESTRICTIONS - SWITCHES AND AUXILIARY TRACKS

Maximum speed permitted through turnout of other than main track switches, 10 MPH; main track switches, 15 MPH.

Trains and engines using auxiliary tracks must not exceed maximum turnout speed for that track.

TRAINS AND ENGINES WILL BE GOVERNED BY RULE 93 ON LINDSAY DISTRICT.

Trains and engines must secure a clearance card before leaving Pauls Valley.

At Pauls Valley, First District time table rules apply.

1. SPEED REGULATIONS

(A) MAXIMUM AUTHORIZED SPEED

Lindsay District 25 MPH

(B) SPEED RESTRICTIONS - CURVES & BRIDGES

Washita River Bridge, M.P. 21.7 to 21.8 10 MPH

(C) SPEED RESTRICTIONS - SWITCHES AND AUXILIARY TRACKS

Maximum speed permitted through turnout of other than main track switches, 10 MPH; main track switches, 15 MPH.

Trains and engines using auxiliary tracks must not exceed maximum turnout speed for that track.

2. OVERHEAD AND SIDE OBSTRUCTIONS (Rule 759)

M.P. 21.7 Bridge, Washita River

3. TRACKS BETWEEN STATIONS

Name	Mile Post	Track Capacity in Feet
Wacker Warehouse	1.2	700

SPECIAL RULES

4. On tracks where TCS is in effect and maximum authorized speed exceeds 20 MPH, a train or engine must not clear such tracks through a hand-operated switch not electrically locked for the purpose of meeting, passing or being passed by another train or engine. Not applicable Hale to Santa Fe Jct., Dallas District; M.P. 346.8 to Saginaw, Second District.

5. MAXIMUM SPEED OF ENGINES

	Forward or dead in train MPH	When not controlled from leading unit MPH
AMTRAK 100-799 5940-5948	90*	45
1153-1160, 1215-1260 1416-1441, 1500-1536 2326-2390	45	45
ALL OTHER CLASSES	70	45

Forward speed applies when lead unit of train is controlling and is in backing position. EXCEPTION: When such unit is car body type, maximum authorized speed 45 MPH.

*Engines without cars must not exceed 70 MPH.

6. MAXIMUM DEPTH OF WATER THROUGH WHICH ENGINES MAY BE OPERATED AND MAXIMUM SPEED IN SUCH OPERATION.

	Maximum Depth Above Top of Rail Inches	Maximum Speed MPH
All Classes	4	5

7. Derricks, cranes, pile drivers, spreaders and similar machinery moving on its own running gear must not be moved in trains except on authority of Trainmaster, and trains or engines handling such equipment must not exceed speeds indicated below:

DISTRICT	Wrecking Derricks MPH	Pile Drivers AT-199454 AT-199455 AT-199457 AT-199458 AT-199459 AT-199460 Locomotive Crane AT-199720 and Jordan Spreaders MPH	Other Machines including Pile Drivers AT-199452 AT-199453 AT-199456 MPH
First, Second and Sweetwater	40	45	30
Other Districts	20	20	20

Locomotive crane AT 199720 and pile drivers must be handled in trains next to engine.

All foreign line scale test cars must be handled in train immediately ahead of caboose at speed not exceeding 50 MPH.

8. YARD LIMITS—Following districts and stations have yard limits: (Rule 93)

Ballinger
Birds—Second District in ABS only.
Brownwood
Cleburne
Cresson, Cresson Dist. only
Dallas
Farmersville
Garland—Zacha Jct.
Hale—Duncanville, inclusive
Midlothian
Paris
Pauls Valley—Lindsay District only.
San Angelo
San Angelo Jct., San Angelo District only
Sweetwater, Sayard District, Plains Division only
White Rock—Zacha Jct.
Wolfe City

9. BULLETIN BOOKS ARE LOCATED:

Ardmore	Fort Worth	Pauls Valley	Sosan (San Antonio)
Arkansas City	Gainesville	Purcell	Temple (Relay Office)
Brownwood	Greenville	Saginaw	Zacha Jct.
Cleburne	Midlothian	San Angelo	
Dallas	Paris	Sweetwater	

10. STANDARD CLOCKS ARE LOCATED:

Ardmore	Dallas	Gainesville	Sweetwater
Brownwood	Fort Worth	Purcell	Saginaw
Cleburne		San Angelo	Zacha Jct.

11. JOINT TRACK FACILITIES:

Farmersville-Dallas. L&A trains use AT&SF tracks between Farmersville and Dallas and are governed by AT&SF Time Table and Instructions; Kansas City Southern Ry. Co. Operating Rules and General Orders.

Tecific-Sweetwater. T&P trains use AT&SF tracks between Tecific and Sweetwater and are governed by AT&SF Time Table, Missouri Pacific System Time Table and Uniform Code of Operating Rules.

SPEED TABLE -- FOR INFORMATION ONLY

Time Per Mile Min. Sec.	Miles Per Hour	Time Per Mile Min. Sec.	Miles Per Hour	Time Per Mile Min. Sec.	Miles Per Hour
36	100	58	62.1	1 40	36.0
37	97.3	59	61.0	1 42	35.3
38	94.7	1	60.0	1 44	34.6
39	92.3	1 02	58.0	1 46	34.0
40	90.0	1 04	56.2	1 48	33.3
41	87.8	1 06	54.5	1 50	32.7
42	85.7	1 08	52.9	1 52	32.1
43	83.7	1 10	51.4	1 54	31.6
44	81.8	1 12	50.0	1 56	31.0
45	80.0	1 14	48.6	1 58	30.5
46	78.3	1 16	47.4	2	30.0
47	76.6	1 18	46.1	2 05	28.8
48	75.0	1 20	45.0	2 10	27.7
49	73.5	1 22	43.9	2 15	26.7
50	72.0	1 24	42.9	2 30	24.0
51	70.6	1 26	41.9	2 45	21.8
52	69.2	1 28	40.9	3	20.0
53	67.9	1 30	40.0	3 30	17.1
54	66.6	1 32	39.1	4	15.0
55	65.5	1 34	38.3	5	12.0
56	64.2	1 36	37.5	6	10.0
57	63.2	1 38	36.8	12	5.0

R. W. WELLS, General Watch Inspector Topeka, Kansas

SURGEONS OF THE SANTA FE EMPLOYES' HOSPITAL ASSOCIATION

DR. T. SPEED, Medical Director Temple
 DR. D. J. LYNCH, Medical Director Temple


LOCAL SURGEONS

DR. R. H. TULL	Abilene
DR. J. C. SNOW	Abilene
DR. OLLIE MCBRIDE	Ada
DR. J. M. GORDON	Ardmore
DR. THORNTON KELL	Ardmore
DR. DAVID D. ROSE	Ardmore
DR. ROGER REID	Ardmore
DR. TOM C. SPARKS	Ardmore
DR. F. D. MANNERBERG	Ardmore
DR. CLIFFORD LORRENTZEN	Ardmore
DR. JOHN H. VEAZEY	Ardmore
DR. W. S. GAUTHIER	Ardmore
DR. BERNARD MYCOSKIE	Arlington
DR. A. G. DIETRICH	Ballinger
DR. J. B. STEPHENS	Bangs
DR. P. M. WHEELIS	Brownwood
DR. NED SNYDER	Brownwood
DR. F. D. SPENCER	Brownwood
DR. SEALE T. CUTBIRTH	Brownwood
DR. HARRY N. THOMAS	Brownwood
DR. ALLAN J. SPENCE	Brownwood
DR. W. S. WISE	Brownwood
DR. L. W. LANG	Brownwood
DR. JAMES B. HAYES	Brownwood
DR. LARRY R. DELANE	Brownwood
DR. S. G. JOHNSON	Cleburne
DR. MORRIS D. MANN	Comanche
DR. W. D. BLACKWOOD	Coleman
DR. SIDNEY GALT	Dallas
DR. O. J. WADDELL	Dallas
DR. E. R. RICHARDSON	Dallas
DR. FRANK O. SEAY	Dallas
DR. C. M. PRESTON	Dallas
DR. SHELTON BLAIR (Dermatology)	Dallas
DR. DALE BURSTEIN	Dallas
DR. MICHAEL A. MESCHKE	Dallas
DR. DON BLANTON	Dallas
DR. J. WM. LANTIUS	Dallas
DR. J. WALTER LANIUS	Dallas
DR. ROBERT HENDERSON	Dallas
DR. FRANK G. GARFIAS	Dallas
DR. E. M. EGGENBERG	Davis
DR. H. M. BURGESS	Denton



DR. W. S. MILLER, JR.	Denton
DR. CONRAD KINARD	Denton
DR. JAMES D. THOMAS	Denton
DR. J. H. JONES	Denton
DR. HAL V. NORGAARD	Denton
DR. JOE PATE	Dublin
DR. BEN H. BRADLEY	Dublin
DR. JACK L. WEBB	Farmersville
DR. CARL M. AUSTIN	Ft. Worth
DR. E. N. WALSH (Dermatology)	Ft. Worth
DR. E. SAUKIN	Gainesville
DR. JAMES R. COLE	Gainesville
DR. DAVID C. SHAUT	Gainesville
DR. L. R. BYRD, III	Gainesville
DR. A. E. GUTHRIE, JR.	Hurst
DR. D. E. COLE	Justin
DR. E. R. FOSTER	Justin
DR. HENRY G. RYAN	Lindsay
DR. DON J. WILSON	Marietta
DR. JACK W. RICE	Mesquite
DR. R. L. LAMBERT	Mesquite
DR. ROY E. BOHL	Midlothian
DR. JAMES H. LINDSEY	Pauls Valley
DR. R. E. SPENCE	Pauls Valley
DR. W. C. MCCURDY	Purcell
DR. J. G. ROLLINS	Purcell
DR. W. T. STONE	Purcell
DR. W. LACY SMITH	San Angelo
DR. W. H. BRAUNS	San Angelo
DR. T. R. HUNTER, JR.	San Angelo
DR. M. D. KNIGHT	San Angelo
DR. R. A. MORSE	San Angelo
DR. W. L. SMITH	San Angelo
DR. S. H. GATNER	San Angelo
DR. A. G. DIETRICH	San Angelo
DR. FILEMON C. CABANSAG	Santa Anna
DR. J. C. TERRELL	Stephenville
DR. GEORGE N. BECKLOFF	Stratford
DR. L. R. MOSES	Sweetwater
DR. T. M. TRIMBLE	Wylie
DR. M. E. ROBERSON	Wynnewood

EYE, EAR, NOSE AND THROAT SPECIALISTS



DR. VIRGINIA BOYD	Abilene
DR. W. R. MOTE	Ardmore
DR. S. BRASWELL LOCKER	Brownwood
DR. H. B. ALLEN, JR.	Brownwood
DR. J. W. PICKENS	Cleburne
DR. DAVID STAYER	Dallas
DR. BERT C. BRYAN	Dallas
DR. WILLIAM SKOKAN	Ft. Worth
DR. LEO SCHACHAR	Gainesville
DR. CHAS. K. MILLS	Gainesville
DR. VANCE TERRELL	Stephenville
DR. T. E. HUNT	Paris

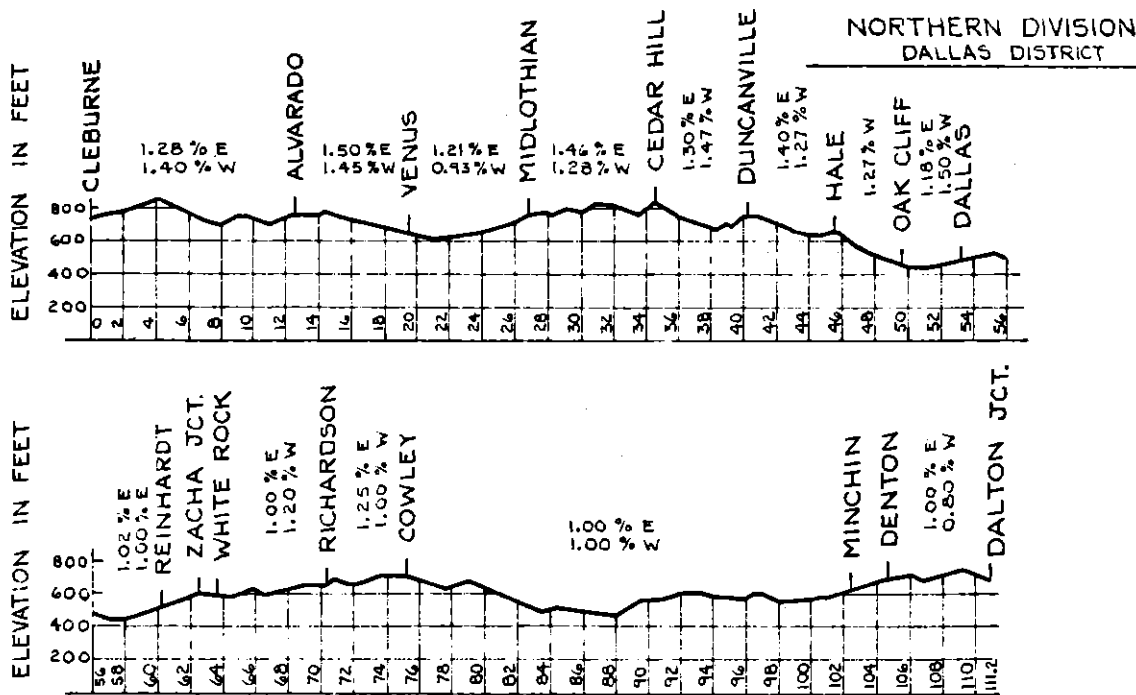



PURCELL TO GAINESVILLE
FIRST DISTRICT

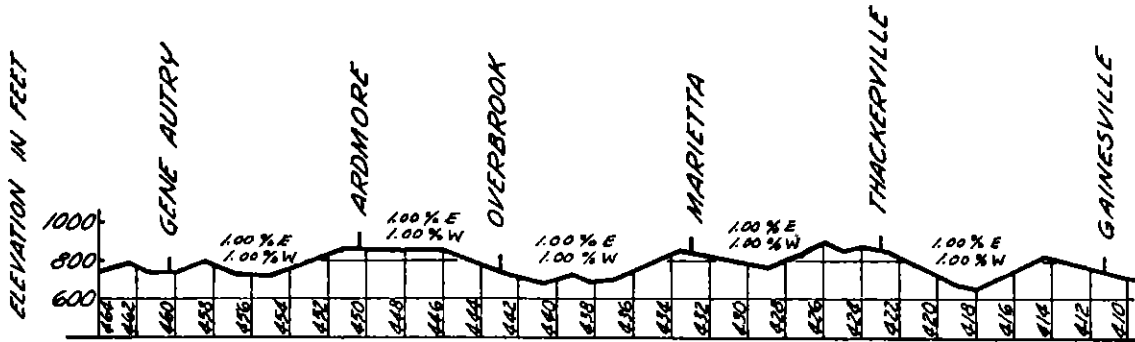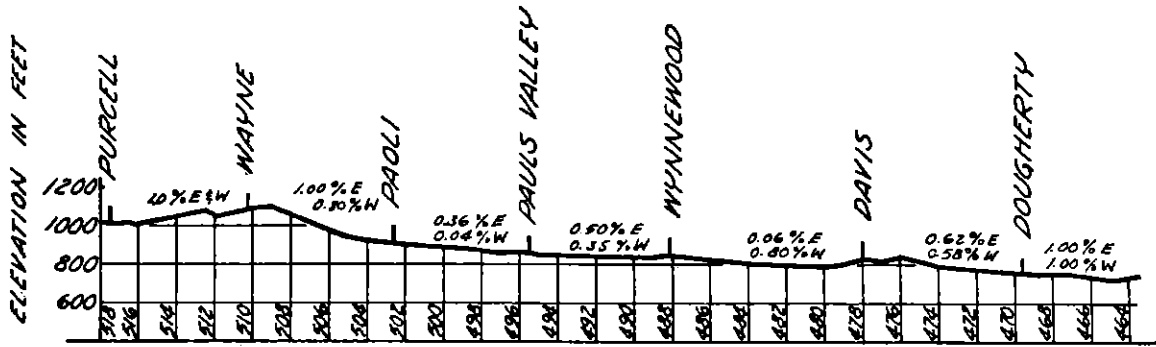



GAINESVILLE TO CLEBURNE
SECOND DISTRICT

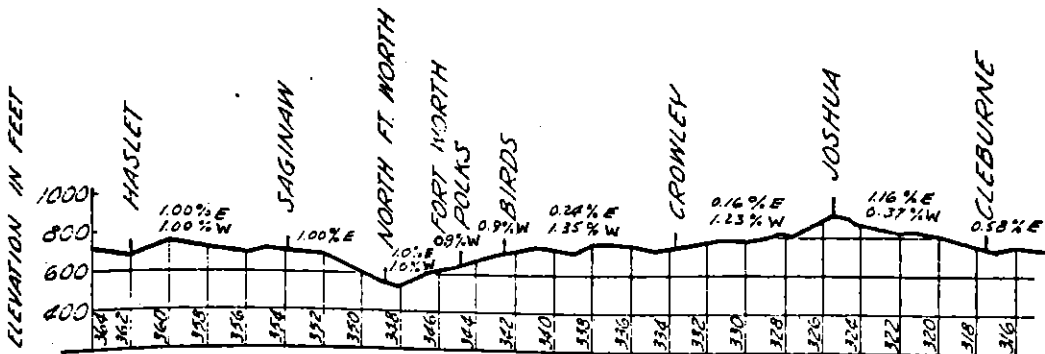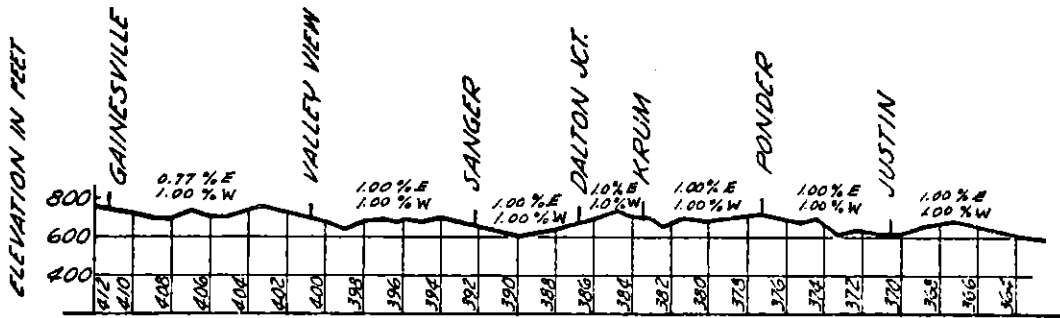

BIRDS TO RICKE
DUBLIN DISTRICT

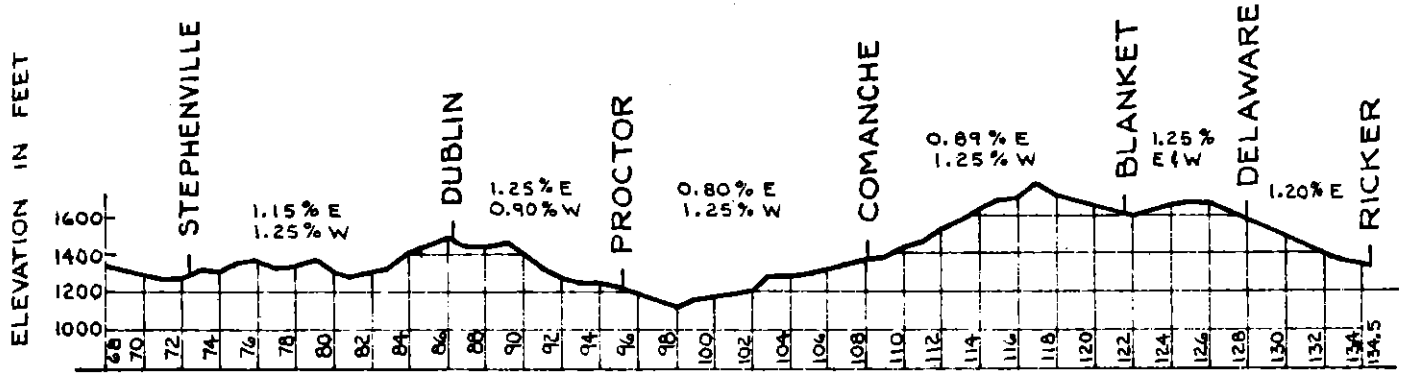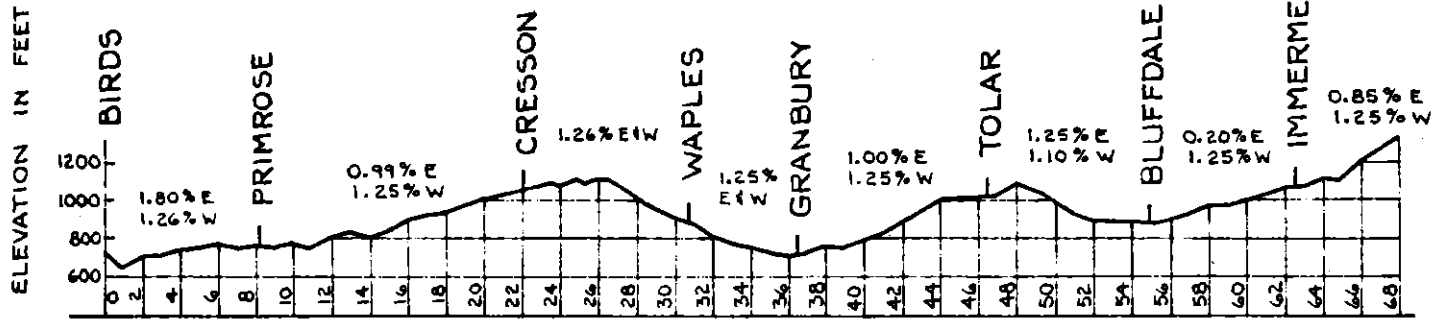

SWEETWATER TO BROWNWOOD
SWEETWATER DISTRICT

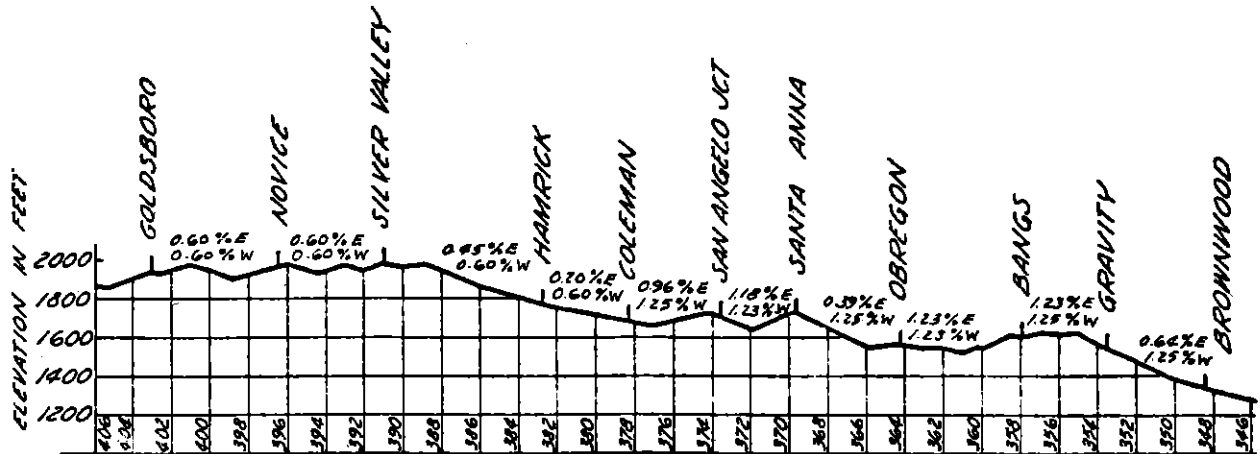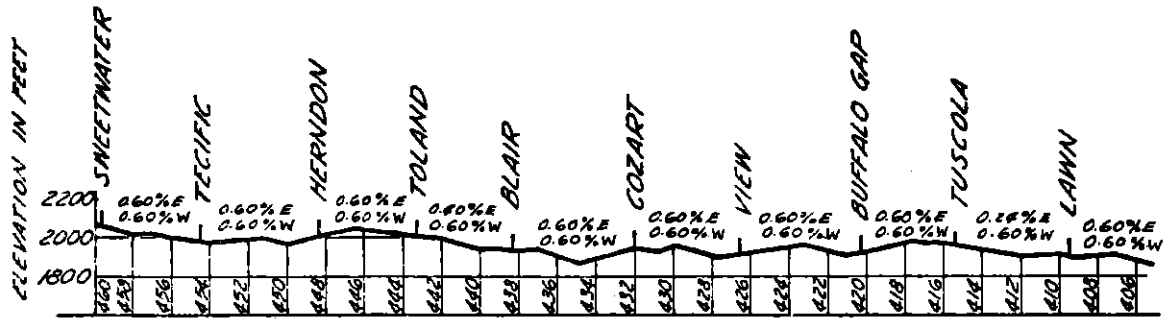

HOW TO USE THIS CHART:

To determine where a placarded car can be placed in a train follow these steps:
 -Determine the type of placard that is applied to the car. From Line 1.
 -Determine the type of car to which the placard is applied from. Line 2.
 -Follow vertically down the chart and note which lines apply.
 -The symbol "✓" indicates wording at the side that applies.
 -See footnotes for explanation.


POSITION IN TRAIN OF PLACARDED CARS CONTAINING HAZARDOUS MATERIALS

1		PLACARD APPLIED ON CAR	PLACARD APPLIED ON CAR											
2			ANY CARS (Exp. flat car, tank car, etc. unless otherwise specified)	TANK CAR	OTHER THAN TANK CAR	ANY CAR	TANK CAR	OTHER THAN TANK CAR	TANK CAR	TANK CAR	OTHER THAN TANK CAR	COMBUSTIBLE		
3	RESTRICTIONS													
4	WHEN TRAIN LENGTH PERMITS	MUST NOT BE NEARER THAN 6th FROM ENGINE, OCCUPIED CABOOSE OR PASSENGER CAR	✓	✓				✓						
5	WHEN TRAIN LENGTH DOES NOT PERMIT	MUST BE NEAR MIDDLE OF TRAIN BUT NOT NEARER THAN 2nd FROM ENGINE, OCCUPIED CABOOSE.	✓	✓				✓						
6	MUST NOT BE PLACARDED NEXT TO	LOADED FLAT CAR. A FLATCAR EQUIPPED WITH PERMANENTLY ATTACHED ENDS OF RIGID CONSTRUCTION IS CONSIDERED TO BE AN OPEN-TOP CAR.	✓ ^①	✓	✓			✓ ^②						
7		AN OPEN-TOP CAR WHEN ANY OF THE LADING PROTRUDES BEYOND THE CAR ENDS OR WHEN ANY OF THE LADING EXTENDING ABOVE THE CAR ENDS IS LIABLE TO SHIFT SO AS TO PROTRUDE BEYOND THE CAR ENDS.	✓	✓	✓			✓						
8		ENGINE	✓	✓	✓	✓	✓						✓	
9		EXCEPT AS PROVIDED IN LINES 10 AND 11, A CAR OCCUPIED BY ANY PERSON OR A PASSENGER CAR OR COMBINATION CAR THAT MAY BE OCCUPIED.	✓ ^③	✓ ^③	✓ ^③	✓	✓		✓ ^④	✓				
10		OCCUPIED CABOOSE	✓ ^③	✓ ^③	✓ ^③	✓	✓					✓		
11		OCCUPIED GUARD CAR	✓ ^③	✓ ^③	✓ ^③		✓							
12		UNDEVELOPED FILM					✓							
13		A CAR WITH AUTOMATIC REFRIGERATION OR HEATING APPARATUS IN OPERATION, OR A CAR WITH OPEN-FLAME APPARATUS IN SERVICE, OR WITH AN INTERNAL COMBUSTION ENGINE IN OPERATION.	✓	✓	✓		✓							
14		A CAR CONTAINING LIGHTED HEATERS, STOVES, OR LANTERNS.	✓	✓	✓									
15		CAR PLACARDED	EXPLOSIVES A		✓	✓	✓	✓	✓					
16		POISON GAS	✓				✓	✓	✓					
17		LOADED PLACARDED CAR, OTHER THAN A CAR PLACARDED WITH THE SAME PLACARD OR THE "COMBUSTIBLE" PLACARD.	✓	✓	✓	✓								
18		RADIOACTIVE	✓	✓	✓			✓	✓					

FOOTNOTES:

- ① Loaded cars placarded "EXPLOSIVES A" may be placed next to each other.
- ② A specially equipped car in trailer-on-flatcar or container-on-flatcar service or a flatcar loaded with vehicles secured by means of a device designed for that purpose and permanently installed on the flatcar, and of a type generally accepted for handling in interchange between railroads may be placed next to these placarded loaded tank cars subject to the following: this exception for cars in trailer-on-flatcar service does not apply to loaded flatbed trucks, loaded flatbed trailers, loaded open-top trailers, or loaded trucks or trailers without securely closed doors.
- ③ A rail car placarded "EXPLOSIVES A" or "POISON GAS" in a moving or standing train must be next to and ahead of any car occupied by the guards or technical escorts accompanying this car. However, if a car occupied by guards or technical escorts is equipped with a lighted heater or stove, it must be the fourth car behind any car requiring "EXPLOSIVES A" placards.
- ④ Applies only in mixed train service, see section 174.87

District	Page
First	2
Second	4
Dublin	6
Dallas	8
Sweetwater	10
San Angelo	12
Paris	13
Cresson	14
Lindsay	14

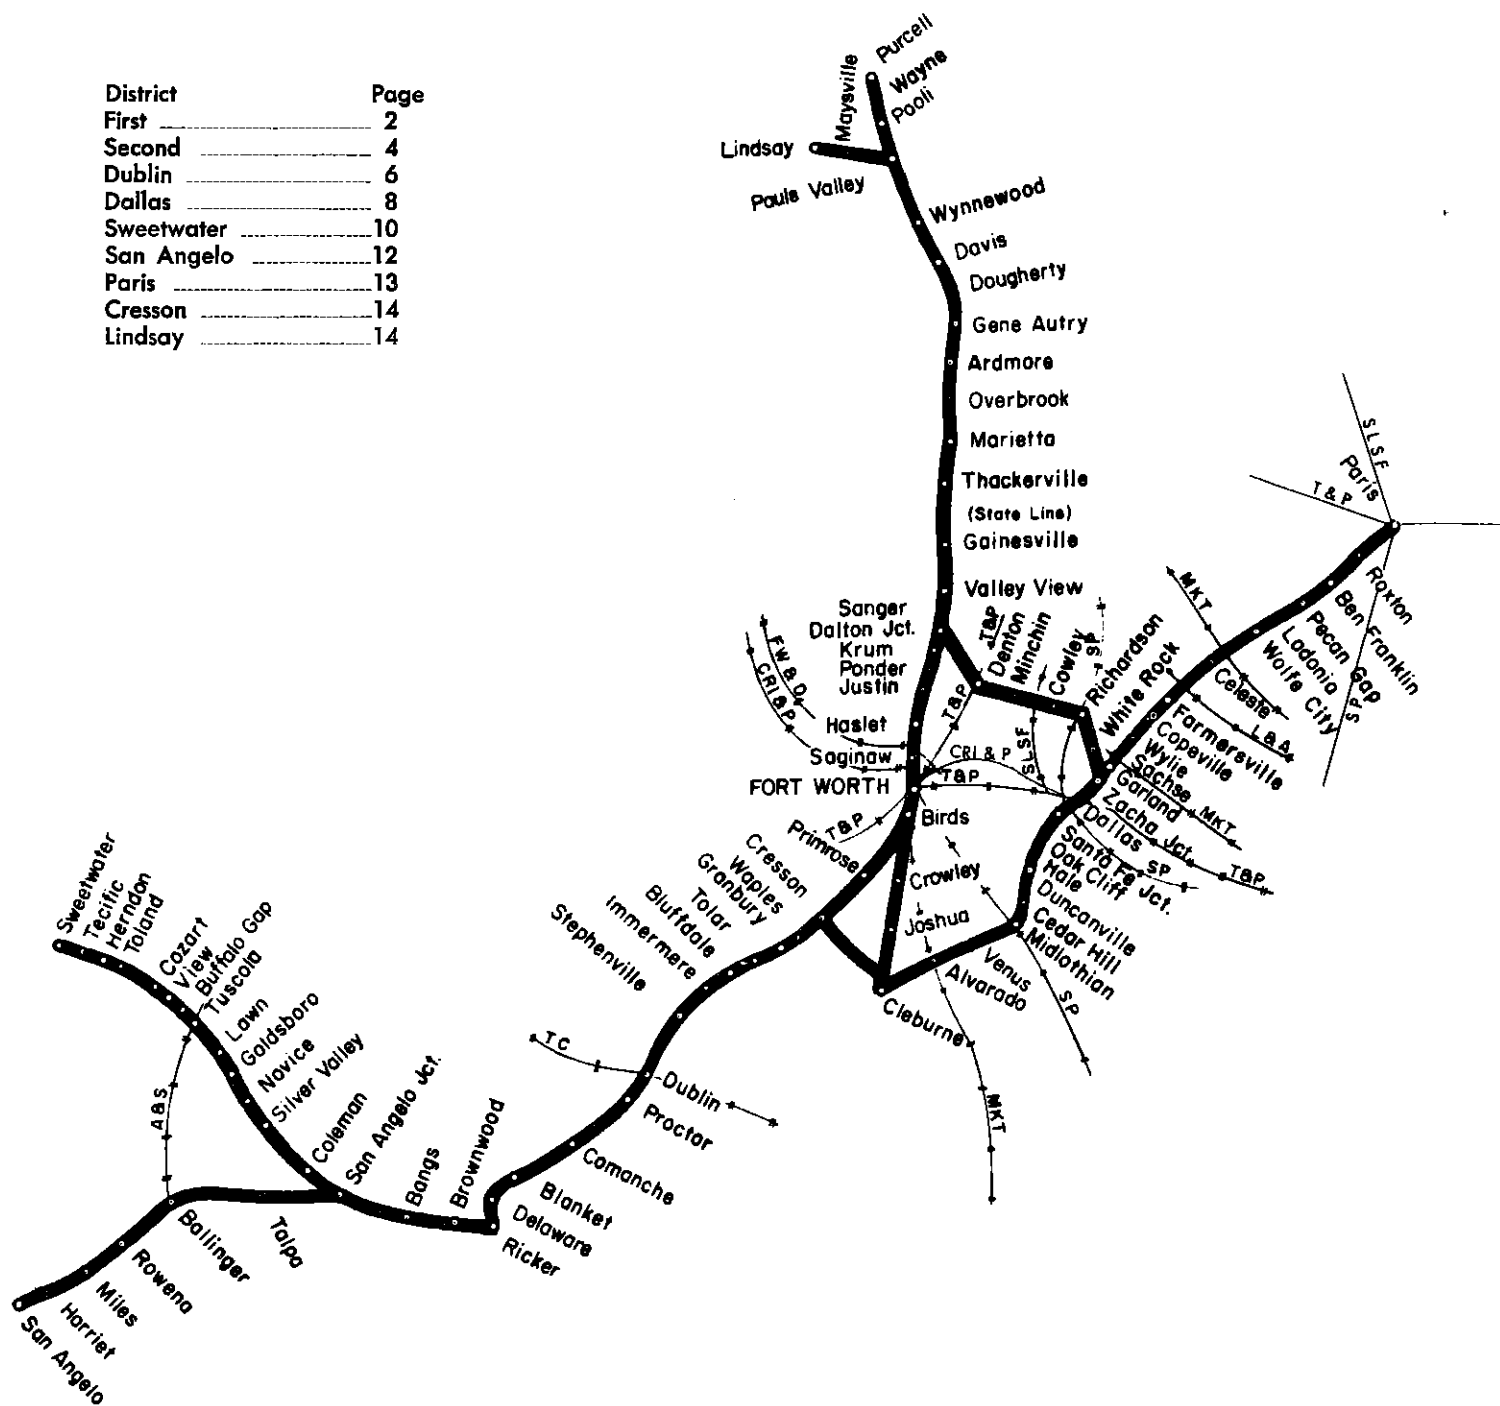

NORTHERN DIVISION